



T COPPER TUBE TERMINALS T 銅管端子





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0001-0001	T1.5-4	4.3	4.0	2.4	8.7	7.0	19.0
LY0001-0002	T1.5-5	5.3	4.0	2.4	8.7	7.0	19.0
LY0001-0003	T1.5-6	6.4	4.0	2.4	10.0	7.0	20.0
LY0001-0004	T2.5-4	4.3	4.3	2.7	8.7	7.0	19.0
LY0001-0005	T2.5-5	5.3	4.3	2.7	8.7	7.0	19.0
LY0001-0006	T2.5-6	6.4	4.3	2.7	10.3	7.0	21.0
LY0001-0007	T2.5-8	8.3	4.3	2.7	12.0	7.0	23.0
LY0001-0008	T4-4	4.3	4.8	3.1	8.7	9.5	21.5
LY0001-0009	T4-5	5.3	4.8	3.1	8.7	9.5	21.5
LY0001-0010	T4-6	6.4	4.8	3.1	10.3	9.5	23.5
LY0001-0011	T4-8	8.3	4.8	3.1	12.5	9.5	28.5
LY0001-0012	T6-4	4.3	5.5	3.8	10.3	10.0	26.0
LY0001-0013	T6-5	5.3	5.5	3.8	10.3	10.0	26.0
LY0001-0014	T6-6	6.4	5.5	3.8	10.3	10.0	26.0
LY0001-0015	T6-8	8.3	5.5	3.8	13.9	10.0	29.0
LY0001-0016	T6-10	10.5	5.5	3.8	13.9	10.0	29.0
LY0001-0017	T10-4	4.3	6.9	4.7	11.9	11.5	27.5
LY0001-0018	T10-5	5.3	6.9	4.7	11.9	11.5	27.5
LY0001-0019	T10-6	6.4	6.9	4.7	11.9	11.5	27.5
LY0001-0020	T10-8	8.3	6.9	4.7	13.5	11.5	30.5
LY0001-0021	T10-10	10.5	6.9	4.7	15.0	11.5	30.5
LY0001-0022	T10-12	13.2	6.9	4.7	17.0	11.5	34.0
LY0001-0023	T16-5	5.3	7.8	5.6	12.0	12.0	27.5
LY0001-0024	T16-6	6.4	7.8	5.6	12.0	12.0	27.5
LY0001-0025	T16-8	8.3	7.8	5.6	13.5	12.0	31.0
LY0001-0026	T16-10	10.5	7.8	5.6	16.0	12.0	32.0
LY0001-0027	T16-12	13.2	7.8	5.6	17.0	12.0	37.5
LY0001-0028	T25-6	6.4	9.5	7.1	14.0	13.5	34.0
LY0001-0029	T25-8	8.3	9.5	7.1	14.0	13.5	34.0
LY0001-0030	T25-10	10.5	9.5	7.1	16.0	13.5	37.0
LY0001-0031	T25-12	13.2	9.5	7.1	18.0	13.5	40.0
LY0001-0032	T35-6	6.4	11.0	8.2	16.5	16.0	39.0
LY0001-0033	T35-8	8.3	11.0	8.2	16.5	16.0	39.0
LY0001-0034	T35-10	10.5	11.0	8.2	16.5	16.0	43.0
LY0001-0035	T35-12	13.2	11.0	8.2	18.0	16.0	43.0
LY0001-0036	T35-14	14.5	11.0	8.2	20.0	16.0	48.0
LY0001-0037	T35-16	16.5	11.0	8.2	23.0	16.0	48.0
LY0001-0038	T40-6	6.4	11.2	9.0	17.0	17.0	44.0
LY0001-0039	T40-8	8.3	11.2	9.0	17.0	17.0	44.0
LY0001-0040	T40-10	10.5	11.2	9.0	17.0	17.0	44.0
LY0001-0041	T40-12	13.2	11.2	9.0	18.0	17.0	44.0
LY0001-0042	T50-6	6.4	12.5	9.5	18.0	20.0	45.0
LY0001-0043	T50-8	8.3	12.5	9.5	18.0	20.0	45.0
LY0001-0044	T50-10	10.5	12.5	9.5	18.0	20.0	49.0
LY0001-0045	T50-12	13.2	12.5	9.5	18.0	20.0	49.0
LY0001-0046	T50-14	14.5	12.5	9.5	22.0	20.0	54.0
LY0001-0047	T50-16	16.5	14.0	9.5	25.0	23.0	62.0
LY0001-0048	T50-20	21.0	14.0	9.5	30.0	23.0	68.0
LY0001-0049	T70-8	8.3	15.0	11.5	22	20.0	47.6
LY0001-0050	T70-10	10.5	15.0	11.5	22	20.0	51.6
LY0001-0051	T70-12	13.2	15.0	11.5	22	20.0	51.6

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0001-0052	T70-14	14.5	15.0	11.5	22.0	20.0	62.6
LY0001-0053	T70-16	16.5	15.0	11.5	22.0	20.0	62.6
LY0001-0054	T70-20	21.0	15.0	11.5	30.0	20.0	62.6
LY0001-0055	T95-8	8.3	17.0	13.5	25.0	22.0	55.8
LY0001-0056	T95-10	10.5	17.0	13.5	25.0	22.0	55.8
LY0001-0057	T95-12	13.2	17.0	13.5	25.0	22.0	55.8
LY0001-0058	T95-14	14.5	17.0	13.5	25.0	22.0	66.8
LY0001-0059	T95-16	16.5	17.0	13.5	25.0	22.0	66.8
LY0001-0060	T95-20	21.0	17.0	13.5	28.0	22.0	66.8
LY0001-0061	T120-10	10.5	20.0	15.6	29.0	27.0	71.5
LY0001-0062	T120-12	13.2	20.0	15.6	29.0	27.0	71.5
LY0001-0063	T120-14	14.5	20.0	15.6	29.0	27.0	71.5
LY0001-0064	T120-16	16.5	20.0	15.6	29.0	27.0	71.5
LY0001-0065	T120-20	21.0	20.0	15.6	29.0	27.0	71.5
LY0001-0066	T150-10	10.5	21.0	16.5	30.6	32.0	78.0
LY0001-0067	T150-12	13.2	21.0	16.5	30.6	32.0	78.0
LY0001-0068	T150-14	14.5	21.0	16.5	30.6	32.0	78.0
LY0001-0069	T150-16	16.5	21.0	16.5	30.6	32.0	78.0
LY0001-0070	T150-20	21.0	21.0	16.5	30.6	32.0	78.0
LY0001-0071	T185-10	10.5	23.6	18.4	34.0	34.0	84.0
LY0001-0072	T185-12	13.2	23.6	18.4	34.0	34.0	84.0
LY0001-0073	T185-14	14.5	23.6	18.4	34.0	34.0	84.0
LY0001-0074	T185-16	16.5	23.6	18.4	34.0	34.0	84.0
LY0001-0075	T185-20	21.0	23.6	18.4	34.0	34.0	84.0
LY0001-0076	T240-10	10.5	26.4	21.2	38.5	37.0	90.0
LY0001-0077	T240-12	13.2	26.4	21.2	38.5	37.0	90.0
LY0001-0078	T240-14	14.5	26.4	21.2	38.5	37.0	90.0
LY0001-0079	T240-16	16.5	26.4	21.2	38.5	37.0	90.0
LY0001-0080	T240-20	21.0	26.4	21.2	38.5	37.0	90.0
LY0001-0081	T300-10	10.5	28.6	23.4	42.0	40.0	96.0
LY0001-0082	T300-12	13.2	28.6	23.4	42.0	40.0	96.0
LY0001-0083	T300-14	14.5	28.6	23.4	42.0	40.0	96.0
LY0001-0084	T300-16	16.5	28.6	23.4	42.0	40.0	96.0
LY0001-0085	T300-20	21.0	28.6	23.4	42.0	40.0	96.0
LY0001-0086	T400-10	10.5	32.8	26.8	48.0	37.0	104.7
LY0001-0087	T400-12	13.2	32.8	26.8	48.0	37.0	104.7
LY0001-0088	T400-14	14.5	32.8	26.8	48.0	37.0	104.7
LY0001-0089	T400-16	16.5	32.8	26.8	48.0	37.0	104.7
LY0001-0090	T400-20	21.0	32.8	26.8	48.0	37.0	104.7
LY0001-0091	T500-10	10.5	38.4	29.8	55.0	46.5	115.5
LY0001-0092	T500-12	13.2	38.4	29.8	55.0	46.5	115.5
LY0001-0093	T500-14	14.5	38.4	29.8	55.0	46.5	115.5
LY0001-0094	T500-16	16.5	38.4	29.8	55.0	46.5	115.5
LY0001-0095	T500-20	21.0	38.4	29.8	55.0	46.5	115.5
LY0001-0096	T630-10	10.5	44.7	34.5	64.0	50.0	133.1
LY0001-0097	T630-12	13.2	44.7	34.5	64.0	50.0	133.1
LY0001-0098	T630-14	14.5	44.7	34.5	64.0	50.0	133.1
LY0001-0099	T630-16	16.5	44.7	34.5	64.0	50.0	133.1
LY0001-0100	T630-20	21.0	44.7	34.5	64.0	50.0	133.1

B-T COPPER TUBE TERMINALS B-T 銅管端子 UL:E357535





◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ΦE	ΦD	Φd	W	B	L
LY0001-1001	B-T1.5-4	4.3	3.8	2.4	8.7	7.0	19.0
LY0001-1002	B-T1.5-5	5.3	3.8	2.4	8.7	7.0	19.0
LY0001-1003	B-T1.5-6	6.4	3.8	2.4	10	7.0	20.0
LY0001-1004	B-T2.5-4	4.3	4.0	2.7	8.7	7.0	19.0
LY0001-1005	B-T2.5-5	5.3	4.0	2.7	8.7	7.0	19.0
LY0001-1006	B-T2.5-6	6.4	4.0	2.7	10.3	7.0	21.0
LY0001-1007	B-T2.5-8	8.3	4.0	2.7	12.0	7.0	23.0
LY0001-1008	B-T4-4	4.3	4.5	3.1	8.7	9.5	21.5
LY0001-1009	B-T4-5	5.3	4.5	3.1	8.7	9.5	21.5
LY0001-1010	B-T4-6	6.4	4.5	3.1	10.3	9.5	23.5
LY0001-1011	B-T4-8	8.3	4.5	3.1	12.5	9.5	28.5
LY0001-1012	B-T6-4	4.3	5.2	3.8	10.3	10.0	26.0
LY0001-1013	B-T6-5	5.3	5.2	3.8	10.3	10.0	26.0
LY0001-1014	B-T6-6	6.4	5.2	3.8	10.3	10.0	26.0
LY0001-1015	B-T6-8	8.3	5.2	3.8	13.9	10.0	29.0
LY0001-1016	B-T6-10	10.5	5.2	3.8	13.9	10.0	29.0
LY0001-1017	B-T10-4	4.3	6.5	4.7	11.9	11.5	27.5
LY0001-1018	B-T10-5	5.3	6.5	4.7	11.9	11.5	27.5
LY0001-1019	B-T10-6	6.4	6.5	4.7	11.9	11.5	27.5
LY0001-1020	B-T10-8	8.3	6.5	4.7	13.5	11.5	30.5
LY0001-1021	B-T10-10	10.5	6.5	4.7	15.0	11.5	30.5
LY0001-1022	B-T10-12	13.2	6.5	4.7	17.0	11.5	34.0
LY0001-1023	B-T16-5	5.3	7.4	5.6	12.0	12.0	27.5
LY0001-1024	B-T16-6	6.4	7.4	5.6	12.0	12.0	27.5
LY0001-1025	B-T16-8	8.3	7.4	5.6	13.5	12.0	31.0
LY0001-1026	B-T16-10	10.5	7.4	5.6	16.0	12.0	32.0
LY0001-1027	B-T16-12	13.2	7.4	5.6	17.0	12.0	37.5
LY0001-1028	B-T25-6	6.4	9.1	7.1	14.0	13.5	34.0
LY0001-1029	B-T25-8	8.3	9.1	7.1	14.0	13.5	34.0
LY0001-1030	B-T25-10	10.5	9.1	7.1	16.0	13.5	37.0
LY0001-1031	B-T25-12	13.2	9.1	7.1	18.0	13.5	40.0
LY0001-1032	B-T35-6	6.4	10.5	8.2	16.0	16.0	39.0
LY0001-1033	B-T35-8	8.3	10.5	8.2	16.0	16.0	39.0
LY0001-1034	B-T35-10	10.5	10.5	8.2	16.0	16.0	43.0
LY0001-1035	B-T35-12	13.2	10.5	8.2	18.0	16.0	43.0
LY0001-1036	B-T35-14	14.5	10.5	8.2	20.0	16.0	48.0
LY0001-1037	B-T35-16	16.5	10.5	8.2	23.0	16.0	48.0
LY0001-1038	B-T40-6	6.4	10.8	9.0	16.3	17.0	44.0
LY0001-1039	B-T40-8	8.3	10.8	9.0	16.3	17.0	44.0
LY0001-1040	B-T40-10	10.5	10.8	9.0	16.3	17.0	44.0
LY0001-1041	B-T40-12	13.2	10.8	9.0	18.0	17.0	44.0
LY0001-1042	B-T50-6	6.4	12.0	9.5	17.5	20.0	45.0
LY0001-1043	B-T50-8	8.3	12.0	9.5	17.5	20.0	45.0
LY0001-1044	B-T50-10	10.5	12.0	9.5	17.5	20.0	49.0
LY0001-1045	B-T50-12	13.2	12.0	9.5	17.5	20.0	49.0
LY0001-1046	B-T50-14	14.5	12.0	9.5	22.0	20.0	54.0
LY0001-1047	B-T50-16	16.5	13.3	9.5	25.0	23.0	62.0
LY0001-1048	B-T50-20	21.0	13.3	9.5	30.0	23.0	68.0
LY0001-1049	B-T70-8	8.3	14.4	11.5	21.0	20.0	47.6
LY0001-1050	B-T70-10	10.5	14.4	11.5	21.0	20.0	51.6
LY0001-1051	B-T70-12	13.2	14.4	11.5	21.0	20.0	51.6

PART NO	ITEM NO	DIMENSIONS					
		ΦE	ΦD	Φd	W	B	L
LY0001-1052	B-T70-14	14.5	14.4	11.5	21.0	20.0	62.6
LY0001-1053	B-T70-16	16.5	14.4	11.5	21.0	20.0	62.6
LY0001-1054	B-T70-20	21.0	14.4	11.5	30.0	20.0	62.6
LY0001-1055	B-T95-8	8.3	16.4	13.5	24.0	22.0	55.8
LY0001-1056	B-T95-10	10.5	16.4	13.5	24.0	22.0	55.8
LY0001-1057	B-T95-12	13.2	16.4	13.5	24.0	22.0	55.8
LY0001-1058	B-T95-14	14.5	16.4	13.5	24.0	22.0	66.8
LY0001-1059	B-T95-16	16.5	16.4	13.5	24.0	22.0	66.8
LY0001-1060	B-T95-20	21.0	16.4	13.5	28.0	22.0	66.8
LY0001-1061	B-T120-10	10.5	19.2	15.6	28.0	27.0	71.5
LY0001-1062	B-T120-12	13.2	19.2	15.6	28.0	27.0	71.5
LY0001-1063	B-T120-14	14.5	19.2	15.6	28.0	27.0	71.5
LY0001-1064	B-T120-16	16.5	19.2	15.6	28.0	27.0	71.5
LY0001-1065	B-T120-20	21.0	19.2	15.6	28.0	27.0	71.5
LY0001-1066	B-T150-10	10.5	20.2	16.5	29.5	32.0	78.0
LY0001-1067	B-T150-12	13.2	20.2	16.5	29.5	32.0	78.0
LY0001-1068	B-T150-14	14.5	20.2	16.5	29.5	32.0	78.0
LY0001-1069	B-T150-16	16.5	20.2	16.5	29.5	32.0	78.0
LY0001-1070	B-T150-20	21.0	20.2	16.5	29.5	32.0	78.0
LY0001-1071	B-T185-10	10.5	22.7	18.4	33.0	34.0	84.0
LY0001-1072	B-T185-12	13.2	22.7	18.4	33.0	34.0	84.0
LY0001-1073	B-T185-14	14.5	22.7	18.4	33.0	34.0	84.0
LY0001-1074	B-T185-16	16.5	22.7	18.4	33.0	34.0	84.0
LY0001-1075	B-T185-20	21.0	22.7	18.4	33.0	34.0	84.0
LY0001-1076	B-T240-10	10.5	25.5	21.2	37.5	37.0	90.0
LY0001-1077	B-T240-12	13.2	25.5	21.2	37.5	37.0	90.0
LY0001-1078	B-T240-14	14.5	25.5	21.2	37.5	37.0	90.0
LY0001-1079	B-T240-16	16.5	25.5	21.2	37.5	37.0	90.0
LY0001-1080	B-T240-20	21.0	25.5	21.2	37.5	37.0	90.0
LY0001-1081	B-T300-10	10.5	27.7	23.4	40.8	40.0	96.0
LY0001-1082	B-T300-12	13.2	27.7	23.4	40.8	40.0	96.0
LY0001-1083	B-T300-14	14.5	27.7	23.4	40.8	40.0	96.0
LY0001-1084	B-T300-16	16.5	27.7	23.4	40.8	40.0	96.0
LY0001-1085	B-T300-20	21.0	27.7	23.4	40.8	40.0	96.0
LY0001-1086	B-T400-10	10.5	31.7	26.8	46.8	37.0	104.7
LY0001-1087	B-T400-12	13.2	31.7	26.8	46.8	37.0	104.7
LY0001-1088	B-T400-14	14.5	31.7	26.8	46.8	37.0	104.7
LY0001-1089	B-T400-16	16.5	31.7	26.8	46.8	37.0	104.7
LY0001-1090	B-T400-20	21.0	31.7	26.8	46.8	37.0	104.7
LY0001-1091	B-T500-10	10.5	36.9	29.8	54.0	46.5	115.5
LY0001-1092	B-T500-12	13.2	36.9	29.8	54.0	46.5	115.5
LY0001-1093	B-T500-14	14.5	36.9	29.8	54.0	46.5	115.5
LY0001-1094	B-T500-16	16.5	36.9	29.8	54.0	46.5	115.5
LY0001-1095	B-T500-20	21.0	36.9	29.8	54.0	46.5	115.5
LY0001-1096	B-T630-10	10.5	42.9	34.5	62.0	50.0	133.1
LY0001-1097	B-T630-12	13.2	42.9	34.5	62.0	50.0	133.1
LY0001-1098	B-T630-14	14.5	42.9	34.5	62.0	50.0	133.1
LY0001-1099	B-T630-16	16.5	42.9	34.5	62.0	50.0	133.1
LY0001-1100	B-T630-20	21.0	42.9	34.5	62.0	50.0	133.1

S-T COPPER TUBE TERMINALS S-T 銅管端子 UL:E357535




◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-2001	S-T1.5-4	4.3	3.3	1.8	8.7	7.0	18.0
LY0001-2002	S-T1.5-5	5.3	3.3	1.8	8.7	7.0	18.5
LY0001-2003	S-T1.5-6	6.4	3.3	1.8	11.0	7.0	20.0
LY0001-2004	S-T2.5-4	4.3	4.3	2.7	8.7	7.0	18.0
LY0001-2005	S-T2.5-5	5.3	4.3	2.7	8.7	7.0	19.0
LY0001-2006	S-T2.5-6	6.4	4.3	2.7	9.0	7.0	20.0
LY0001-2007	S-T2.5-8	8.3	4.3	2.7	12.0	7.0	24.0
LY0001-2008	S-T4-4	4.3	5.0	3.3	8.7	9.5	21.0
LY0001-2009	S-T4-5	5.3	5.0	3.3	8.7	9.5	21.0
LY0001-2010	S-T4-6	6.4	5.0	3.3	11.0	9.5	23.0
LY0001-2011	S-T4-8	8.3	5.0	3.3	14.0	9.5	26.5
LY0001-2012	S-T6-4	4.3	5.5	3.8	10.3	9.0	23.0
LY0001-2013	S-T6-5	5.3	5.5	3.8	10.3	9.0	23.0
LY0001-2014	S-T6-6	6.4	5.5	3.8	10.3	9.5	24.0
LY0001-2015	S-T6-8	8.3	5.5	3.8	14.0	9.0	27.0
LY0001-2016	S-T10-5	5.3	6.8	4.7	11.9	10.0	25.5
LY0001-2017	S-T10-6	6.4	6.8	4.7	11.9	10.0	27.0
LY0001-2018	S-T10-8	8.3	6.8	4.7	15.0	10.0	30.0
LY0001-2019	S-T10-10	10.5	6.8	4.7	18.0	10.0	34.0
LY0001-2020	S-T16-5	5.3	7.8	5.6	11.9	11.0	26.5
LY0001-2021	S-T16-6	6.4	7.8	5.6	11.9	11.0	28.5
LY0001-2022	S-T16-8	8.3	7.8	5.6	15.0	11.0	31.0
LY0001-2023	S-T16-10	10.5	7.8	5.6	18.0	11.0	34.5
LY0001-2024	S-T16-12	13.2	7.8	5.6	20.0	11.0	38.5
LY0001-2025	S-T25-6	6.4	9.4	7.1	13.5	13.0	31.0
LY0001-2026	S-T25-8	8.3	9.4	7.1	15.0	13.0	34.0
LY0001-2027	S-T25-10	10.5	9.4	7.1	18.0	13.0	39.0
LY0001-2028	S-T25-12	13.0	9.4	7.1	21.0	13.0	41.0
LY0001-2029	S-T35-6	6.4	11.3	8.7	16.0	16.0	34.0
LY0001-2030	S-T35-8	8.3	11.3	8.7	16.0	16.0	38.0
LY0001-2031	S-T35-10	10.5	11.3	8.7	19.0	16.0	42.0
LY0001-2032	S-T35-12	13.0	11.3	8.7	21.0	16.0	44.0
LY0001-2033	S-T35-14	14.5	11.3	8.7	21.0	16.0	48.0
LY0001-2034	S-T50-6	6.4	12.6	9.8	17.9	19.0	41.0
LY0001-2035	S-T50-8	8.3	12.6	9.8	17.9	19.0	43.0
LY0001-2036	S-T50-10	10.5	12.6	9.8	20.0	19.0	47.0
LY0001-2037	S-T50-12	13.0	12.6	9.8	21.0	19.0	51.0
LY0001-2038	S-T50-14	14.5	12.6	9.8	25.0	19.0	53.0
LY0001-2039	S-T50-16	16.5	12.6	9.8	26.0	19.0	55.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-2040	S-T70-8	8.3	14.7	11.5	21.5	21.0	47.0
LY0001-2041	S-T70-10	10.5	14.7	11.5	21.5	21.0	51.0
LY0001-2042	S-T70-12	13.0	14.7	11.5	21.5	21.0	53.0
LY0001-2043	S-T70-14	14.5	14.7	11.5	25.0	21.0	58.0
LY0001-2044	S-T70-16	16.5	14.7	11.5	26.0	21.0	59.0
LY0001-2045	S-T95-8	8.3	16.9	13.5	24.7	24.0	52.0
LY0001-2046	S-T95-10	10.5	16.9	13.5	24.7	24.0	55.0
LY0001-2047	S-T95-12	13.0	16.9	13.5	24.7	24.0	57.0
LY0001-2048	S-T95-14	14.5	16.9	13.5	24.7	24.0	61.0
LY0001-2049	S-T95-16	16.5	16.9	13.5	27.0	24.0	64.0
LY0001-2050	S-T120-8	8.3	19.9	15.6	28.9	26.5	56.0
LY0001-2051	S-T120-10	10.5	19.9	15.6	28.9	26.5	58.0
LY0001-2052	S-T120-12	13.0	19.9	15.6	28.9	26.5	63.0
LY0001-2053	S-T120-14	14.5	19.9	15.6	28.9	26.5	67.0
LY0001-2054	S-T120-16	16.5	19.9	15.6	28.9	27.5	71.0
LY0001-2055	S-T150-10	10.5	20.9	16.5	30.4	32.0	69.0
LY0001-2056	S-T150-12	13.0	20.9	16.5	30.4	32.0	75.0
LY0001-2057	S-T150-14	14.5	20.9	16.5	30.4	32.0	79.0
LY0001-2058	S-T150-16	16.5	20.9	16.5	30.4	32.0	79.0
LY0001-2059	S-T185-10	10.5	23.7	18.8	34.0	34.0	74.0
LY0001-2060	S-T185-12	13.0	23.7	18.8	34.0	34.0	80.0
LY0001-2061	S-T185-14	14.5	23.7	18.8	34.0	34.0	84.0
LY0001-2062	S-T185-16	16.5	23.7	18.8	34.0	34.0	85.0
LY0001-2063	S-T240-10	10.5	26.2	21.2	38.4	38.0	82.0
LY0001-2064	S-T240-12	13.0	26.2	21.2	38.4	38.0	86.0
LY0001-2065	S-T240-14	14.5	26.2	21.2	38.4	38.0	90.0
LY0001-2066	S-T240-16	16.5	26.2	21.2	38.4	38.0	91.0
LY0001-2067	S-T300-12	13.0	28.6	23.4	41.7	43.0	93.0
LY0001-2068	S-T300-14	14.5	28.6	23.4	41.7	43.0	94.0
LY0001-2069	S-T300-16	16.5	28.6	23.4	41.7	43.0	100.0
LY0001-2070	S-T400-12	13.0	32.8	26.8	47.8	49.0	110.0
LY0001-2071	S-T400-14	14.5	32.8	26.8	47.8	49.0	110.0
LY0001-2072	S-T400-16	16.5	32.8	26.8	47.8	49.0	110.0
LY0001-2073	S-T400-20	21.0	32.8	26.8	47.8	49.0	116.0
LY0001-2074	S-T500-16	16.5	38.4	29.8	54.8	50.0	115.0
LY0001-2075	S-T500-20	21.0	38.4	29.8	54.8	50.0	120.0
LY0001-2076	S-T630-16	16.5	44.7	34.5	64.4	62.0	128.0
LY0001-2077	S-T630-20	21.0	44.7	34.5	64.4	62.0	134.0

TL WITH LONG BARREL COPPER TUBE TERMINALS TL 铜管端子





◎Material
◎Terminal Body: Copper
◎Plating: Tin



PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-3001	TL10-6	6.4	6.9	4.7	11.9	19.0	35.0
LY0001-3002	TL10-8	8.3	6.9	4.7	13.5	19.0	38.0
LY0001-3003	TL16-6	6.4	7.8	5.6	11.9	23.0	39.0
LY0001-3004	TL16-8	8.3	7.8	5.6	13.6	23.0	42.0
LY0001-3005	TL25-8	8.3	9.5	7.1	14.0	29.0	50.0
LY0001-3006	TL25-10	10.5	9.5	7.1	16.0	29.0	53.0
LY0001-3007	TL35-8	8.3	11.0	8.2	16.5	30.0	54.0
LY0001-3008	TL35-10	10.5	11.0	8.2	16.5	30.0	58.0
LY0001-3009	TL50-10	10.5	12.5	9.5	18.0	35.0	64.0
LY0001-3010	TL50-12	13.0	12.5	9.5	18.0	35.0	64.0
LY0001-3011	TL70-10	10.5	15.0	11.5	21.5	38.0	70.0
LY0001-3012	TL70-12	13.0	15.0	11.5	21.5	38.0	70.0
LY0001-3013	TL95-14	14.5	17.0	13.5	25.0	43.0	88.0
LY0001-3014	TL95-16	16.5	17.0	13.5	25.0	43.0	88.0
LY0001-3015	TL120-14	14.5	20.0	15.6	29.0	49.0	94.0
LY0001-3016	TL120-16	16.5	20.0	15.6	29.0	49.0	94.0
LY0001-3017	TL150-14	14.5	21.0	16.5	30.6	56.0	102.0
LY0001-3018	TL150-16	16.5	21.0	16.5	30.6	56.0	102.0
LY0001-3019	TL185-14	14.5	23.6	18.4	34.0	63.0	113.0
LY0001-3020	TL185-16	16.5	23.6	18.4	34.0	63.0	113.0
LY0001-3021	TL240-14	14.5	26.4	21.2	38.5	66.0	119.0
LY0001-3022	TL240-16	16.5	26.4	21.2	38.5	66.0	119.0
LY0001-3023	TL300-14	14.5	28.6	23.4	42.0	77.0	133.0
LY0001-3024	TL400-16	16.5	32.8	26.8	48.0	71.7	140.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-3025	S-TL-10/6	6.4	6.8	4.7	11.9	18.0	35.0
LY0001-3026	S-TL-10/8	8.3	6.8	4.7	15.0	18.0	38.0
LY0001-3027	S-TL-16/6	6.4	7.8	5.6	11.9	21.5	39.0
LY0001-3028	S-TL-16/8	8.3	7.8	5.6	15.0	21.5	41.5
LY0001-3029	S-TL-25/8	8.3	9.4	7.1	15.0	29.0	50.0
LY0001-3030	S-TL-25/10	10.5	9.4	7.1	18.0	29.0	55.0
LY0001-3031	S-TL-35/8	8.3	11.3	8.7	16.0	31.0	53.0
LY0001-3032	S-TL-35/10	10.5	11.3	8.7	19.0	31.0	57.0
LY0001-3033	S-TL-50/10	10.5	12.6	9.8	20.0	35.0	63.0
LY0001-3034	S-TL-50/12	13.0	12.6	9.8	21.0	35.0	67.0
LY0001-3035	S-TL-70/10	10.5	14.7	11.5	21.5	39.0	69.0
LY0001-3036	S-TL-70/12	13.2	14.7	11.5	21.5	39.0	71.0
LY0001-3037	S-TL-95/12	13.0	16.9	13.5	24.7	46.0	79.0
LY0001-3038	S-TL-95/14	14.5	16.9	13.5	24.7	46.0	83.0
LY0001-3039	S-TL-95/16	16.5	16.9	13.5	27.0	46.0	86.0
LY0001-3040	S-TL-120/12	13.0	19.9	15.6	28.9	51.0	87.0
LY0001-3041	S-TL-120/14	14.5	19.9	15.6	28.9	51.0	91.0
LY0001-3042	S-TL-120/16	16.5	19.9	15.6	28.9	52.0	95.0
LY0001-3043	S-TL-150/12	13.0	20.9	16.5	30.4	56.0	99.0
LY0001-3044	S-TL-150/14	14.5	20.9	16.5	30.4	56.0	103.0
LY0001-3045	S-TL-150/16	16.5	20.9	16.5	30.4	56.0	103.0
LY0001-3046	S-TL-185/12	13.0	23.7	18.8	34.0	62.0	108.0
LY0001-3047	S-TL-185/14	14.5	23.7	18.8	34.0	62.0	112.0
LY0001-3048	S-TL-185/16	16.5	23.7	18.8	34.0	62.0	113.0
LY0001-3049	S-TL-240/12	13.0	26.2	21.2	38.4	66.0	114.0
LY0001-3050	S-TL-240/14	14.5	26.2	21.2	38.4	66.0	118.0
LY0001-3051	S-TL-240/16	16.5	26.2	21.2	38.4	66.0	119.0
LY0001-3052	S-TL-300/14	14.5	28.6	23.4	41.7	75.0	132.0
LY0001-3053	S-TL-300/16	16.5	28.6	23.4	41.7	75.0	132.0
LY0001-3054	S-TL-400/16	16.5	32.8	26.8	47.8	79.0	140.0
LY0001-3055	S-TL-500/16	16.5	38.4	29.8	54.8	78.0	143.0

T45° COPPER TUBE TERMINALS T45°銅管端子



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin





- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin



PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L1
LY0001-4001	T45-10/6	6.4	6.9	4.7	11.9	10.0	12.5
LY0001-4002	T45-10/8	8.3	6.9	4.7	13.5	10.0	15.5
LY0001-4003	T45-16/6	6.4	7.8	5.6	11.9	11.0	12.0
LY0001-4004	T45-16/8	8.3	7.8	5.6	13.5	11.0	15.5
LY0001-4005	T45-25/8	8.3	9.5	7.1	14.0	13.0	16.0
LY0001-4006	T45-25/10	10.5	9.5	7.1	16.0	13.0	19.0
LY0001-4007	T45-35/8	8.3	11.0	8.2	16.5	16.0	18.0
LY0001-4008	T45-35/10	10.5	11.0	8.2	16.5	16.0	22.0
LY0001-4009	T45-50/10	10.5	12.5	9.5	17.9	19.0	22.0
LY0001-4010	T45-50/12	13.0	12.5	9.5	17.9	19.0	22.0
LY0001-4011	T45-70/10	10.5	15.0	11.5	21.5	21.0	22.0
LY0001-4012	T45-70/12	13.0	15.0	11.5	21.5	21.0	22.0
LY0001-4013	T45-95/14	14.5	17.0	13.5	24.7	24.0	33.0
LY0001-4014	T45-95/16	16.5	17.0	13.5	24.7	24.0	33.0
LY0001-4015	T45-120/14	14.5	20.0	15.6	28.9	27.0	33.0
LY0001-4016	T45-120/16	16.5	20.0	15.6	28.9	27.0	33.0
LY0001-4017	T45-150/14	14.5	21.0	16.5	30.4	32.0	33.0
LY0001-4018	T45-150/16	16.5	21.0	16.5	30.4	32.0	33.0
LY0001-4019	T45-185/16	16.5	23.6	18.4	34.0	34.0	35.0
LY0001-4020	T45-240/16	16.5	26.4	21.2	38.5	38.0	35.0

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L1
LY0001-4021	S-T45-10/6	6.4	6.8	4.7	11.9	10.0	13.0
LY0001-4022	S-T45-10/8	8.3	6.8	4.7	15.0	10.0	16.0
LY0001-4023	S-T45-16/6	6.4	7.8	5.6	11.9	11.0	13.0
LY0001-4024	S-T45-16/8	8.3	7.8	5.6	15.0	11.0	15.5
LY0001-4025	S-T45-25/8	8.3	9.4	7.1	15.0	13.0	16.0
LY0001-4026	S-T45-25/10	10.5	9.4	7.1	18.0	13.0	21.0
LY0001-4027	S-T45-35/8	8.3	11.3	8.7	16.0	16.0	17.0
LY0001-4028	S-T45-35/10	10.5	11.3	8.7	19.0	16.0	21.0
LY0001-4029	S-T45-50/10	10.5	12.6	9.8	20.0	19.0	21.0
LY0001-4030	S-T45-50/12	13.0	12.6	9.8	21.0	19.0	25.0
LY0001-4031	S-T45-70/10	10.5	14.7	11.5	21.5	21.0	21.0
LY0001-4032	S-T45-70/12	13.0	14.7	11.5	21.5	21.0	23.0
LY0001-4033	S-T45-95/14	14.5	16.9	13.5	24.7	24.0	28.0
LY0001-4034	S-T45-95/16	16.5	16.9	13.5	27.0	24.0	31.0
LY0001-4035	S-T45-120/14	14.5	19.9	15.6	26.5	26.5	30.0
LY0001-4036	S-T45-120/16	16.5	19.9	15.6	28.9	26.5	33.0
LY0001-4037	S-T45-150/14	14.5	20.9	16.5	30.4	32.0	34.0
LY0001-4038	S-T45-150/16	16.5	20.9	16.5	30.4	32.0	34.0
LY0001-4039	S-T45-185/16	16.5	23.7	18.8	34.0	34.0	35.0
LY0001-4040	S-T45-240/16	16.5	26.2	21.2	38.4	38.0	35.0

T90° COPPER TUBE TERMINALS T90°铜管端子



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin





- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L1
LY0001-5001	T90-10/6	6.4	6.9	4.7	11.9	10.5	12.5
LY0001-5002	T90-10/8	8.3	6.9	4.7	13.5	10.5	15.5
LY0001-5003	T90-16/6	6.4	7.8	5.6	11.9	11.0	12.0
LY0001-5004	T90-16/8	8.6	7.8	5.6	13.5	11.0	15.5
LY0001-5005	T90-25/8	8.3	9.5	7.1	14.0	13.0	16.0
LY0001-5006	T90-25/10	10.5	9.5	7.1	16.0	13.0	19.0
LY0001-5007	T90-35/8	8.3	11.0	8.2	16.5	16.0	18.0
LY0001-5008	T90-35/10	10.5	11.0	8.2	16.5	16.0	22.0
LY0001-5009	T90-50/10	10.5	12.5	9.5	17.9	19.0	22.0
LY0001-5010	T90-50/12	13.0	12.5	9.5	17.9	19.0	22.0
LY0001-5011	T90-70/10	10.5	15.0	11.5	21.5	21.0	22.0
LY0001-5012	T90-70/12	13.0	15.0	11.5	21.5	21.0	22.0
LY0001-5013	T90-95/14	14.5	17.0	13.5	24.7	24.0	33.0
LY0001-5014	T90-95/16	16.5	17.0	13.5	24.7	24.0	33.0
LY0001-5015	T90-120/14	14.5	20.0	15.6	28.9	27.0	33.0
LY0001-5016	T90-120/16	16.5	20.0	15.6	28.9	27.0	33.0
LY0001-5017	T90-150/14	14.5	21.0	16.5	30.4	32.0	33.0
LY0001-5018	T90-150/16	16.5	21.0	16.5	30.4	32.0	33.0
LY0001-5019	T90-185/16	16.5	23.6	18.4	34.0	34.0	35.0
LY0001-5020	T90-240/16	16.5	26.4	21.2	38.5	38.0	35.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L1
LY0001-5021	S-T90-10/6	6.4	6.8	4.7	11.9	10.0	13.0
LY0001-5022	S-T90-10/8	8.3	6.8	4.7	15.0	10.0	16.0
LY0001-5023	S-T90-16/6	6.4	7.8	5.6	11.9	11.0	13.0
LY0001-5024	S-T90-16/8	8.3	7.8	5.6	15.0	11.0	15.5
LY0001-5025	S-T90-25/8	8.3	9.4	7.1	15.0	13.0	16.0
LY0001-5026	S-T90-25/10	10.5	9.4	7.1	18.0	13.0	21.0
LY0001-5027	S-T90-35/8	8.3	11.3	8.7	16.0	16.0	17.0
LY0001-5028	S-T90-35/10	10.5	11.3	8.7	19.0	16.0	21.0
LY0001-5029	S-T90-50/10	10.5	12.6	9.8	20.0	19.0	21.0
LY0001-5030	S-T90-50/12	13.0	12.6	9.8	21.0	19.0	25.0
LY0001-5031	S-T90-70/10	10.5	14.7	11.5	21.5	21.0	21.0
LY0001-5032	S-T90-70/12	13.0	14.7	11.5	21.5	21.0	23.0
LY0001-5033	S-T90-95/14	14.5	16.9	13.5	24.7	24.0	28.0
LY0001-5034	S-T90-95/16	16.5	16.9	13.5	27.0	24.0	31.0
LY0001-5035	S-T90-120/14	14.5	19.9	15.6	28.9	26.5	30.0
LY0001-5036	S-T90-120/16	16.5	19.9	15.6	28.9	26.5	33.0
LY0001-5037	S-T90-150/14	14.5	20.9	16.5	30.4	32.0	34.0
LY0001-5038	S-T90-150/16	16.5	20.9	16.5	30.4	32.0	34.0
LY0001-5039	S-T90-185/16	16.5	23.7	18.8	34.0	34.0	35.0
LY0001-5040	S-T90-240/16	16.5	26.2	21.2	38.4	38.0	35.0

TT COPPER TUBE TERMINALS TT銅管端子





- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-6001	TT10-6	6.4	6.9	4.7	11.9	12.0	28.0
LY0001-6002	TT10-8	8.3	6.9	4.7	13.5	12.0	31.0
LY0001-6003	TT16-6	6.4	7.8	5.6	11.9	17.0	33.0
LY0001-6004	TT16-8	8.3	7.8	5.6	13.5	17.0	37.0
LY0001-6005	TT16-10	10.5	7.8	5.6	16.0	17.0	38.0
LY0001-6006	TT25-8	8.3	9.5	7.1	14.0	18.0	39.0
LY0001-6007	TT25-10	10.5	9.5	7.1	16.0	18.0	42.0
LY0001-6008	TT35-8	8.3	11.0	8.2	16.5	19.0	42.0
LY0001-6009	TT35-10	10.5	11.0	8.2	16.5	19.0	46.0
LY0001-6010	TT50-10	10.5	12.5	9.5	17.9	22.0	51.0
LY0001-6011	TT50-12	13.0	12.5	9.5	17.9	22.0	51.0
LY0001-6012	TT70-10	10.5	15.0	11.5	22.0	22.0	54.0
LY0001-6013	TT70-12	13.0	15.0	11.5	22.0	22.0	54.0
LY0001-6014	TT95-14	14.5	17.0	13.5	24.7	27.0	72.0
LY0001-6015	TT95-16	16.5	17.0	13.5	24.7	27.0	72.0
LY0001-6016	TT120-14	14.5	20.0	15.6	28.9	29.0	74.0
LY0001-6017	TT120-16	16.5	20.0	15.6	28.9	29.0	74.0
LY0001-6018	TT150-14	14.5	21.0	16.5	30.4	38.0	84.0
LY0001-6019	TT150-16	16.5	21.0	16.5	30.4	38.0	84.0
LY0001-6020	TT185-16	16.5	23.6	18.4	34.0	42.0	92.0
LY0001-6021	TT240-16	16.5	26.4	21.2	38.5	45.0	98.0
LY0001-6022	S-TT-6/4	4.3	5.5	3.8	10.3	11.0	25.0
LY0001-6023	S-TT-6/5	5.3	5.5	3.8	10.3	11.0	25.0
LY0001-6024	S-TT-6/6	6.4	5.5	3.8	10.3	11.0	26.0
LY0001-6025	S-TT-6/8	8.3	5.5	3.8	14.0	11.0	29.0
LY0001-6026	S-TT-10/4	4.3	6.8	4.7	11.9	11.5	26.5
LY0001-6027	S-TT-10/5	5.3	6.8	4.7	11.9	11.5	27.0
LY0001-6028	S-TT-10/6	6.4	6.8	4.7	11.9	11.5	28.5
LY0001-6029	S-TT-10/8	8.3	6.8	4.7	15.0	11.5	31.5
LY0001-6030	S-TT-10/10	10.5	6.8	4.7	18.0	11.5	35.5
LY0001-6031	S-TT-16/5	5.3	7.8	5.6	11.9	16.5	32.0
LY0001-6032	S-TT-16/6	6.4	7.8	5.6	11.9	16.5	34.0
LY0001-6033	S-TT-16/8	8.3	7.8	5.6	15.0	16.5	36.5
LY0001-6034	S-TT-16/10	10.5	7.8	5.6	18.0	16.5	40.0
LY0001-6035	S-TT-25/6	6.4	9.4	7.1	13.5	18.0	36.0
LY0001-6036	S-TT-25/8	8.3	9.4	7.1	15.0	18.0	39.0
LY0001-6037	S-TT-25/10	10.5	9.4	7.1	18.0	18.0	44.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0001-6038	S-TT-25/12	13.0	9.4	7.1	21.0	18.0	46.0
LY0001-6039	S-TT-35/6	6.4	11.3	8.7	16.0	19.0	37.0
LY0001-6040	S-TT-35/8	8.3	11.3	8.7	16.0	16.0	38.0
LY0001-6041	S-TT-35/10	10.5	11.3	8.7	19.0	19.0	45.0
LY0001-6042	S-TT-35/12	13.0	11.3	8.7	21.0	19.0	47.0
LY0001-6043	S-TT-50/6	6.4	12.6	9.8	17.9	22.0	44.0
LY0001-6044	S-TT-50/8	8.3	12.6	9.8	17.9	22.0	46.0
LY0001-6045	S-TT-50/10	10.5	12.6	9.8	20.0	22.0	50.0
LY0001-6046	S-TT-50/12	13.0	12.6	9.8	21.0	22.0	54.0
LY0001-6047	S-TT-70/8	8.3	14.7	11.5	21.5	23.0	49.0
LY0001-6048	S-TT-70/10	10.5	14.7	11.5	21.5	25.0	55.0
LY0001-6049	S-TT-70/12	13.0	14.7	11.5	21.5	23.0	55.0
LY0001-6050	S-TT-95/8	8.3	16.9	13.5	24.7	30.0	58.0
LY0001-6051	S-TT-95/10	10.5	16.9	13.5	24.7	30.0	61.0
LY0001-6052	S-TT-95/12	13.0	16.9	13.5	24.7	30.0	63.0
LY0001-6053	S-TT-95/14	14.5	16.9	13.5	24.7	30.0	67.0
LY0001-6054	S-TT-95/16	16.5	16.9	13.5	27.0	30.0	70.0
LY0001-6055	S-TT-120/10	10.5	19.9	15.6	28.9	30.5	62.0
LY0001-6056	S-TT-120/12	13.0	19.9	15.6	28.9	30.5	67.0
LY0001-6057	S-TT-120/14	14.5	19.9	15.6	28.9	30.5	74.0
LY0001-6058	S-TT-120/16	16.5	19.9	15.6	28.9	30.5	74.0
LY0001-6059	S-TT-150/10	10.5	20.9	16.5	30.4	38.0	75.0
LY0001-6060	S-TT-150/12	13.0	20.9	16.5	30.4	38.0	81.0
LY0001-6061	S-TT-150/14	14.5	20.9	16.5	30.4	38.0	85.0
LY0001-6062	S-TT-150/16	16.5	20.9	16.5	30.4	38.0	85.0
LY0001-6063	S-TT-185/12	13.0	23.7	18.8	34.0	41.0	87.0
LY0001-6064	S-TT-185/14	14.5	23.7	18.8	34.0	41.0	91.0
LY0001-6065	S-TT-185/16	16.5	23.7	18.8	34.0	41.0	92.0
LY0001-6066	S-TT-240/12	13.0	26.2	21.2	38.4	45.0	93.0
LY0001-6067	S-TT-240/14	14.5	26.2	21.2	38.4	45.0	97.0
LY0001-6068	S-TT-240/16	16.5	26.2	21.2	38.4	45.0	98.0
LY0001-6069	S-TT-240/20	21.0	26.2	21.2	38.4	45.0	98.0
LY0001-6070	S-TT-300/14	14.5	28.6	23.4	41.7	49.0	100.0
LY0001-6071	S-TT-300/16	16.5	28.6	23.4	41.7	49.0	106.0
LY0001-6072	S-TT-400/16	16.5	32.8	26.8	47.8	54.0	115.0

SC COPPER TUBE TERMINALS SC銅管端子 UL:E357535





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-0001	SC1.5-4	4.2	3.7	1.8	8.0	5.0	16.0
LY0002-0002	SC1.5-5	5.2	3.7	1.8	10.0	5.0	17.0
LY0002-0003	SC1.5-6	6.5	3.7	1.8	10.0	5.0	18.0
LY0002-0004	SC2.5-4	4.2	4.0	2.4	8.0	7.0	18.0
LY0002-0005	SC2.5-5	5.2	4.0	2.4	10.0	7.0	20.0
LY0002-0006	SC2.5-6	6.5	4.0	2.4	10.0	7.0	20.0
LY0002-0007	SC2.5-8	8.4	4.0	2.4	12.5	7.0	23.0
LY0002-0008	SC4-4	4.2	4.8	3.1	10.0	7.0	20.0
LY0002-0009	SC4-5	5.2	4.8	3.1	10.0	7.0	20.0
LY0002-0010	SC4-6	6.5	4.8	3.1	10.0	7.0	20.0
LY0002-0011	SC4-8	8.4	4.8	3.1	12.5	7.0	23.0
LY0002-0012	SC6-4	4.2	5.5	3.8	10.0	9.0	24.0
LY0002-0013	SC6-5	5.2	5.5	3.8	10.0	9.0	24.0
LY0002-0014	SC6-6	6.5	5.5	3.8	12.0	9.0	24.0
LY0002-0015	SC6-8	8.4	5.5	3.8	12.5	9.0	26.0
LY0002-0016	SC6-10	10.5	6.2	4.0	15.0	9.0	28.0
LY0002-0017	SC10-5	5.2	6.2	4.5	12.0	9.0	25.0
LY0002-0018	SC10-6	6.5	6.2	4.5	12.0	9.0	25.0
LY0002-0019	SC10-8	8.4	6.2	4.5	12.5	9.0	27.0
LY0002-0020	SC10-10	10.5	6.2	4.5	15.0	9.0	29.0
LY0002-0021	SC10-12	13.0	6.2	4.5	17.0	9.0	31.0
LY0002-0022	SC16-5	5.2	7.1	5.4	12.0	12.0	30.0
LY0002-0023	SC16-6	6.5	7.1	5.4	12.0	12.0	30.0
LY0002-0024	SC16-8	8.4	7.1	5.4	12.5	12.0	30.0
LY0002-0025	SC16-10	10.5	7.1	5.4	16.0	12.0	33.0
LY0002-0026	SC16-12	13.0	7.1	5.4	17.0	12.0	35.0
LY0002-0027	SC25-5	5.2	8.8	6.8	13.0	12.0	33.0
LY0002-0028	SC25-6	6.5	8.8	6.8	13.0	12.0	33.0
LY0002-0029	SC25-8	8.4	8.8	6.8	15.0	12.0	33.0
LY0002-0030	SC25-10	10.5	8.8	6.8	18.0	12.0	34.0
LY0002-0031	SC25-12	13.0	8.8	6.8	18.0	12.0	35.0
LY0002-0032	SC25-14	15.0	8.8	6.8	20.0	12.0	38.0
LY0002-0033	SC35-5	5.2	10.6	8.2	16.0	14.0	38.0
LY0002-0034	SC35-6	6.5	10.6	8.2	16.0	14.0	38.0
LY0002-0035	SC35-8	8.4	10.6	8.2	16.0	14.0	38.0
LY0002-0036	SC35-10	10.5	10.6	8.2	18.0	14.0	39.0
LY0002-0037	SC35-12	13.0	10.6	8.2	19.0	14.0	40.5
LY0002-0038	SC35-14	15.0	10.6	8.2	20.0	14.0	42.0
LY0002-0039	SC50-6	6.5	12.4	9.5	17.8	16.0	45.0
LY0002-0040	SC50-8	8.4	12.4	9.5	17.8	16.0	45.0
LY0002-0041	SC50-10	10.5	12.4	9.5	17.8	16.0	45.0
LY0002-0042	SC50-12	13.0	12.4	9.5	20.0	16.0	45.0
LY0002-0043	SC50-14	15.0	12.4	9.5	22.0	16.0	46.0
LY0002-0044	SC50-16	17.0	12.4	9.5	24.0	16.0	47.0
LY0002-0045	SC70-8	8.4	14.7	11.2	21.0	20.0	52.0
LY0002-0046	SC70-10	10.5	14.7	11.2	21.0	20.0	52.0
LY0002-0047	SC70-12	13.0	14.7	11.2	21.0	20.0	52.0
LY0002-0048	SC70-14	15.0	14.7	11.2	21.0	20.0	52.0

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-0049	SC70-16	17.0	14.7	11.2	25.0	20.0	53.0
LY0002-0050	SC95-8	8.4	17.4	13.5	25.0	23.0	58.0
LY0002-0051	SC95-10	10.5	17.4	13.5	25.0	23.0	58.0
LY0002-0052	SC95-12	13.0	17.4	13.5	25.0	23.0	58.0
LY0002-0053	SC95-14	15.0	17.4	13.5	25.0	23.0	58.0
LY0002-0054	SC95-16	17.0	17.4	13.5	25.0	23.0	58.0
LY0002-0055	SC120-8	8.4	19.4	15.0	28.0	22.0	63.0
LY0002-0056	SC120-10	10.5	19.4	15.0	28.0	22.0	63.0
LY0002-0057	SC120-12	13.0	19.4	15.0	28.0	22.0	63.0
LY0002-0058	SC120-14	15.0	19.4	15.0	28.0	22.0	63.0
LY0002-0059	SC120-16	17.0	19.4	15.0	28.0	22.0	63.0
LY0002-0060	SC120-20	21.0	19.4	15.0	28.0	22.0	63.0
LY0002-0061	SC150-8	8.4	21.2	16.5	30.5	26.0	70.0
LY0002-0062	SC150-10	10.5	21.2	16.5	30.5	26.0	70.0
LY0002-0063	SC150-12	13.0	21.2	16.5	30.5	26.0	70.0
LY0002-0064	SC150-14	15.0	21.2	16.5	30.5	26.0	70.0
LY0002-0065	SC150-16	17.0	21.2	16.5	30.5	26.0	70.0
LY0002-0066	SC150-20	21.0	21.2	16.5	30.5	26.0	70.0
LY0002-0067	SC185-10	10.5	23.5	18.5	34.0	32.0	75.0
LY0002-0068	SC185-12	13.0	23.5	18.5	34.0	32.0	75.0
LY0002-0069	SC185-14	15.0	23.5	18.5	34.0	32.0	75.0
LY0002-0070	SC185-16	17.0	23.5	18.5	34.0	32.0	75.0
LY0002-0071	SC185-20	21.0	23.5	18.5	34.0	32.0	75.0
LY0002-0072	SC240-10	10.5	26.5	21.0	38.5	38.0	90.0
LY0002-0073	SC240-12	13.0	26.5	21.0	38.5	38.0	90.0
LY0002-0074	SC240-14	15.0	26.5	21.0	38.5	38.0	90.0
LY0002-0075	SC240-16	17.0	26.5	21.0	38.5	38.0	90.0
LY0002-0076	SC240-18	19.0	26.5	21.0	38.5	38.0	90.0
LY0002-0077	SC240-20	21.0	26.5	21.0	38.5	38.0	90.0
LY0002-0078	SC300-10	10.5	30.0	23.5	43.0	42.0	98.0
LY0002-0079	SC300-12	13.0	30.0	23.5	43.0	42.0	98.0
LY0002-0080	SC300-14	15.0	30.0	23.5	43.0	42.0	98.0
LY0002-0081	SC300-16	17.0	30.0	23.5	43.0	42.0	98.0
LY0002-0082	SC300-20	21.0	30.0	23.5	43.0	42.0	98.0
LY0002-0083	SC400-10	10.5	36.5	28.5	52.0	44.0	110.0
LY0002-0084	SC400-12	13.0	36.5	28.5	52.0	44.0	110.0
LY0002-0085	SC400-14	15.0	36.5	28.5	52.0	44.0	110.0
LY0002-0086	SC400-16	17.0	36.5	28.5	52.0	44.0	110.0
LY0002-0087	SC400-20	21.0	36.5	28.5	52.0	44.0	110.0
LY0002-0088	SC500-10	10.5	39.0	30.0	56.0	48.0	120.0
LY0002-0089	SC500-12	13.0	39.0	30.0	56.0	48.0	120.0
LY0002-0090	SC500-14	15.0	39.0	30.0	56.0	48.0	120.0
LY0002-0091	SC500-16	17.0	39.0	30.0	56.0	48.0	120.0
LY0002-0092	SC500-20	21.0	39.0	30.0	56.0	48.0	120.0
LY0002-0093	SC630-10	10.5	45.0	35.0	65.0	56.0	140.0
LY0002-0094	SC630-12	13.0	45.0	35.0	65.0	56.0	140.0
LY0002-0095	SC630-14	15.0	45.0	35.0	65.0	56.0	140.0
LY0002-0096	SC630-16	17.0	45.0	35.0	65.0	56.0	140.0
LY0002-0097	SC630-20	21.0	45.0	35.0	65.0	56.0	140.0

SC-NH COPPER TUBE TERMINALS WITHOUT CHECKING HOLE SC-NH无检测孔铜管端子 UL:E357535





- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-1001	SC16-5NH	5.2	7.1	5.4	12.0	12.0	30.0
LY0002-1002	SC16-6NH	6.5	7.1	5.4	12.0	12.0	30.0
LY0002-1003	SC16-8NH	8.4	7.1	5.4	12.5	12.0	30.0
LY0002-1004	SC16-10NH	10.5	7.1	5.4	16.0	12.0	33.0
LY0002-1005	SC16-12NH	13.0	7.1	5.4	17.0	12.0	35.0
LY0002-1006	SC25-5NH	5.2	8.8	6.8	13.0	12.0	33.0
LY0002-1007	SC25-6NH	6.5	8.8	6.8	13.0	12.0	33.0
LY0002-1008	SC25-8NH	8.4	8.8	6.8	15.0	12.0	33.0
LY0002-1009	SC25-10NH	10.5	8.8	6.8	18.0	12.0	34.0
LY0002-1010	SC25-12NH	13.0	8.8	6.8	18.0	12.0	35.0
LY0002-1011	SC25-14NH	15.0	8.8	6.8	20.0	12.0	38.0
LY0002-1012	SC35-5NH	5.2	10.6	8.2	16.0	14.0	38.0
LY0002-1013	SC35-6NH	6.5	10.6	8.2	16.0	14.0	38.0
LY0002-1014	SC35-8NH	8.4	10.6	8.2	16.0	14.0	38.0
LY0002-1015	SC35-10NH	10.5	10.6	8.2	18.0	14.0	39.0
LY0002-1016	SC35-12NH	13.0	10.6	8.2	19.0	14.0	40.5
LY0002-1017	SC35-14NH	15.0	10.6	8.2	20.0	14.0	42.0
LY0002-1018	SC50-6NH	6.5	12.4	9.5	17.8	16.0	45.0
LY0002-1019	SC50-8NH	8.4	12.4	9.5	17.8	16.0	45.0
LY0002-1020	SC50-10NH	10.5	12.4	9.5	17.8	16.0	45.0
LY0002-1021	SC50-12NH	13.0	12.4	9.5	20.0	16.0	45.0
LY0002-1022	SC50-14NH	15.0	12.4	9.5	22.0	16.0	46.0
LY0002-1023	SC50-16NH	17.0	12.4	9.5	24.0	16.0	47.0
LY0002-1024	SC70-8NH	8.4	14.7	11.2	21.0	18.0	50.0
LY0002-1025	SC70-10NH	10.5	14.7	11.2	21.0	18.0	50.0
LY0002-1026	SC70-12NH	13.0	14.7	11.2	21.0	18.0	50.0
LY0002-1027	SC70-14NH	15.0	14.7	11.2	21.0	18.0	50.0
LY0002-1028	SC70-16NH	17.0	14.7	11.2	25.0	18.0	51.0
LY0002-1029	SC95-8NH	8.4	17.4	13.5	25.0	20.0	55.0
LY0002-1030	SC95-10NH	10.5	17.4	13.5	25.0	20.0	55.0
LY0002-1031	SC95-12NH	13.0	17.4	13.5	25.0	20.0	55.0
LY0002-1032	SC95-14NH	15.0	17.4	13.5	25.0	20.0	55.0
LY0002-1033	SC95-16NH	17.0	17.4	13.5	25.0	20.0	55.0
LY0002-1034	SC120-8NH	8.4	19.4	15.0	28.0	22.0	63.0
LY0002-1035	SC120-10NH	10.5	19.4	15.0	28.0	22.0	63.0
LY0002-1036	SC120-12NH	13.0	19.4	15.0	28.0	22.0	63.0
LY0002-1037	SC120-14NH	15.0	19.4	15.0	28.0	22.0	63.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-1038	SC120-16NH	17.0	19.4	15.0	28.0	22.0	63.0
LY0002-1039	SC120-20NH	21.0	19.4	15.0	28.0	22.0	63.0
LY0002-1040	SC150-8NH	8.4	21.2	16.5	30.5	26.0	70.0
LY0002-1041	SC150-10NH	10.5	21.2	16.5	30.5	26.0	70.0
LY0002-1042	SC150-12NH	13.0	21.2	16.5	30.5	26.0	70.0
LY0002-1043	SC150-14NH	15.0	21.2	16.5	30.5	26.0	70.0
LY0002-1044	SC150-16NH	17.0	21.2	16.5	30.5	26.0	70.0
LY0002-1045	SC150-20NH	21.0	21.2	16.5	30.5	26.0	70.0
LY0002-1046	SC185-10NH	10.5	23.5	18.5	34.0	32.0	75.0
LY0002-1047	SC185-12NH	13.0	23.5	18.5	34.0	32.0	75.0
LY0002-1048	SC185-14NH	15.0	23.5	18.5	34.0	32.0	75.0
LY0002-1049	SC185-16NH	17.0	23.5	18.5	34.0	32.0	75.0
LY0002-1050	SC185-20NH	21.0	23.5	18.5	34.0	32.0	75.0
LY0002-1051	SC240-10NH	10.5	26.5	21.0	38.5	38.0	90.0
LY0002-1052	SC240-12NH	13.0	26.5	21.0	38.5	38.0	90.0
LY0002-1053	SC240-14NH	15.0	26.5	21.0	38.5	38.0	90.0
LY0002-1054	SC240-16NH	17.0	26.5	21.0	38.5	38.0	90.0
LY0002-1055	SC240-20NH	21.0	26.5	21.0	38.5	38.0	90.0
LY0002-1056	SC300-10NH	10.5	30.0	23.5	43.0	42.0	98.0
LY0002-1057	SC300-12NH	13.0	30.0	23.5	43.0	42.0	98.0
LY0002-1058	SC300-14NH	15.0	30.0	23.5	43.0	42.0	98.0
LY0002-1059	SC300-16NH	17.0	30.0	23.5	43.0	42.0	98.0
LY0002-1060	SC300-20NH	21.0	30.0	23.5	43.0	42.0	98.0
LY0002-1061	SC400-10NH	10.5	36.5	28.5	52.0	44.0	110.0
LY0002-1062	SC400-12NH	13.0	36.5	28.5	52.0	44.0	110.0
LY0002-1063	SC400-14NH	15.0	36.5	28.5	52.0	44.0	110.0
LY0002-1064	SC400-16NH	17.0	36.5	28.5	52.0	44.0	110.0
LY0002-1065	SC400-20NH	21.0	36.5	28.5	52.0	44.0	110.0
LY0002-1066	SC500-10NH	10.5	39.0	30.0	56.0	48.0	120.0
LY0002-1067	SC500-12NH	13.0	39.0	30.0	56.0	48.0	120.0
LY0002-1068	SC500-14NH	15.0	39.0	30.0	56.0	48.0	120.0
LY0002-1069	SC500-16NH	17.0	39.0	30.0	56.0	48.0	120.0
LY0002-1070	SC500-20NH	21.0	39.0	30.0	56.0	48.0	120.0
LY0002-1071	SC630-10NH	10.5	45.0	35.0	65.0	56.0	140.0
LY0002-1072	SC630-12NH	13.0	45.0	35.0	65.0	56.0	140.0
LY0002-1073	SC630-14NH	15.0	45.0	35.0	65.0	56.0	140.0
LY0002-1074	SC630-16NH	17.0	45.0	35.0	65.0	56.0	140.0
LY0002-1075	SC630-20NH	21.0	45.0	35.0	65.0	56.0	140.0

A-SC COPPER TUBE TERMINALS A-SC銅管端子 UL:E357535





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-2001	A-SC1.5-4	4.2	3.6	1.8	8.0	5.0	16.0
LY0002-2002	A-SC1.5-5	5.2	3.6	1.8	10.0	5.0	17.0
LY0002-2003	A-SC1.5-6	6.5	3.6	1.8	10.0	5.0	18.0
LY0002-2004	A-SC2.5-4	4.2	3.9	2.4	8.0	7.0	18.0
LY0002-2005	A-SC2.5-5	5.2	3.9	2.4	10.0	7.0	20.0
LY0002-2006	A-SC2.5-6	6.5	3.9	2.4	10.0	7.0	20.0
LY0002-2007	A-SC2.5-8	8.4	3.9	2.4	12.5	7.0	23.0
LY0002-2008	A-SC4-4	4.2	4.7	3.1	10.0	7.0	20.0
LY0002-2009	A-SC4-5	5.2	4.7	3.1	10.0	7.0	20.0
LY0002-2010	A-SC4-6	6.5	4.7	3.1	10.0	7.0	20.0
LY0002-2011	A-SC4-8	8.4	4.7	3.1	12.5	7.0	23.0
LY0002-2012	A-SC6-4	4.2	5.4	3.8	10.0	9.0	24.0
LY0002-2013	A-SC6-5	5.2	5.4	3.8	10.0	9.0	24.0
LY0002-2014	A-SC6-6	6.5	5.4	3.8	12.0	9.0	24.0
LY0002-2015	A-SC6-8	8.4	5.4	3.8	12.5	9.0	26.0
LY0002-2016	A-SC6-10	10.5	6.0	4.0	15.0	9.0	28.0
LY0002-2017	A-SC10-5	5.2	6.1	4.5	12.0	9.0	25.0
LY0002-2018	A-SC10-6	6.5	6.1	4.5	12.0	9.0	25.0
LY0002-2019	A-SC10-8	8.4	6.1	4.5	12.5	9.0	27.0
LY0002-2020	A-SC10-10	10.5	6.1	4.5	15.0	9.0	29.0
LY0002-2021	A-SC10-12	13.0	6.1	4.5	17.0	9.0	31.0
LY0002-2022	A-SC16-5	5.2	7.0	5.4	12.0	12.0	30.0
LY0002-2023	A-SC16-6	6.5	7.0	5.4	12.0	12.0	30.0
LY0002-2024	A-SC16-8	8.4	7.0	5.4	12.5	12.0	30.0
LY0002-2025	A-SC16-10	10.5	7.0	5.4	16.0	12.0	33.0
LY0002-2026	A-SC16-12	13.0	7.0	5.4	17.0	12.0	35.0
LY0002-2027	A-SC25-5	5.2	8.6	6.8	13.0	12.0	33.0
LY0002-2028	A-SC25-6	6.5	8.6	6.8	13.0	12.0	33.0
LY0002-2029	A-SC25-8	8.4	8.6	6.8	15.0	12.0	33.0
LY0002-2030	A-SC25-10	10.5	8.6	6.8	18.0	12.0	34.0
LY0002-2031	A-SC25-12	13.0	8.6	6.8	18.0	12.0	35.0
LY0002-2032	A-SC25-14	15.0	8.6	6.8	20.0	12.0	38.0
LY0002-2033	A-SC35-5	5.2	10.4	8.2	16.0	14.0	38.0
LY0002-2034	A-SC35-6	6.5	10.4	8.2	16.0	14.0	38.0
LY0002-2035	A-SC35-8	8.4	10.4	8.2	16.0	14.0	38.0
LY0002-2036	A-SC35-10	10.5	10.4	8.2	18.0	14.0	39.0
LY0002-2037	A-SC35-12	13.0	10.4	8.2	19.0	14.0	40.5
LY0002-2038	A-SC35-14	15.0	10.4	8.2	20.0	14.0	42.0
LY0002-2039	A-SC50-6	6.5	12.2	9.5	17.8	16.0	45.0
LY0002-2040	A-SC50-8	8.4	12.2	9.5	17.8	16.0	45.0
LY0002-2041	A-SC50-10	10.5	12.2	9.5	17.8	16.0	45.0
LY0002-2042	A-SC50-12	13.0	12.2	9.5	20.0	16.0	45.0
LY0002-2043	A-SC50-14	15.0	12.2	9.5	22.0	16.0	46.0
LY0002-2044	A-SC50-16	17.0	12.2	9.5	24.0	16.0	47.0
LY0002-2045	A-SC70-8	8.4	14.4	11.2	21.0	20.0	52.0
LY0002-2046	A-SC70-10	10.5	14.4	11.2	21.0	20.0	52.0
LY0002-2047	A-SC70-12	13.0	14.4	11.2	21.0	20.0	52.0
LY0002-2048	A-SC70-14	15.0	14.4	11.2	21.0	20.0	52.0

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-2049	A-SC70-16	17.0	14.4	11.2	25.0	20.0	53.0
LY0002-2050	A-SC95-8	8.4	17.1	13.5	25.0	23.0	58.0
LY0002-2051	A-SC95-10	10.5	17.1	13.5	25.0	23.0	58.0
LY0002-2052	A-SC95-12	13.0	17.1	13.5	25.0	23.0	58.0
LY0002-2053	A-SC95-14	15.0	17.1	13.5	25.0	23.0	58.0
LY0002-2054	A-SC95-16	17.0	17.1	13.5	25.0	23.0	58.0
LY0002-2055	A-SC120-8	8.4	19.0	15.0	27.5	22.0	63.0
LY0002-2056	A-SC120-10	10.5	19.0	15.0	27.5	22.0	63.0
LY0002-2057	A-SC120-12	13.0	19.0	15.0	27.5	22.0	63.0
LY0002-2058	A-SC120-14	15.0	19.0	15.0	27.5	22.0	63.0
LY0002-2059	A-SC120-16	17.0	19.0	15.0	27.5	22.0	63.0
LY0002-2060	A-SC120-20	21.0	19.0	15.0	27.5	22.0	63.0
LY0002-2061	A-SC150-8	8.4	20.8	16.5	30.0	26.0	70.0
LY0002-2062	A-SC150-10	10.5	20.8	16.5	30.0	26.0	70.0
LY0002-2063	A-SC150-12	13.0	20.8	16.5	30.0	26.0	70.0
LY0002-2064	A-SC150-14	15.0	20.8	16.5	30.0	26.0	70.0
LY0002-2065	A-SC150-16	17.0	20.8	16.5	30.0	26.0	70.0
LY0002-2066	A-SC150-20	21.0	20.8	16.5	30.0	26.0	70.0
LY0002-2067	A-SC185-10	10.5	23.1	18.5	33.5	32.0	75.0
LY0002-2068	A-SC185-12	13.0	23.1	18.5	33.5	32.0	75.0
LY0002-2069	A-SC185-14	15.0	23.1	18.5	33.5	32.0	75.0
LY0002-2070	A-SC185-16	17.0	23.1	18.5	33.5	32.0	75.0
LY0002-2071	A-SC185-20	21.0	23.1	18.5	33.5	32.0	75.0
LY0002-2072	A-SC240-10	10.5	26.0	21.0	38.0	38.0	90.0
LY0002-2073	A-SC240-12	13.0	26.0	21.0	38.0	38.0	90.0
LY0002-2074	A-SC240-14	15.0	26.0	21.0	38.0	38.0	90.0
LY0002-2075	A-SC240-16	17.0	26.0	21.0	38.0	38.0	90.0
LY0002-2076	A-SC240-18	19.0	26.0	21.0	38.0	38.0	90.0
LY0002-2077	A-SC240-20	21.0	26.0	21.0	38.0	38.0	90.0
LY0002-2078	A-SC300-10	10.5	29.4	23.5	43.0	42.0	98.0
LY0002-2079	A-SC300-12	13.0	29.4	23.5	43.0	42.0	98.0
LY0002-2080	A-SC300-14	15.0	29.4	23.5	43.0	42.0	98.0
LY0002-2081	A-SC300-16	17.0	29.4	23.5	43.0	42.0	98.0
LY0002-2082	A-SC300-20	21.0	29.4	23.5	43.0	42.0	98.0
LY0002-2083	A-SC400-10	10.5	35.8	28.5	52.0	44.0	110.0
LY0002-2084	A-SC400-12	13.0	35.8	28.5	52.0	44.0	110.0
LY0002-2085	A-SC400-14	15.0	35.8	28.5	52.0	44.0	110.0
LY0002-2086	A-SC400-16	17.0	35.8	28.5	52.0	44.0	110.0
LY0002-2087	A-SC400-20	21.0	35.8	28.5	52.0	44.0	110.0
LY0002-2088	A-SC500-10	10.5	38.2	30.0	55.0	48.0	120.0
LY0002-2089	A-SC500-12	13.0	38.2	30.0	55.0	48.0	120.0
LY0002-2090	A-SC500-14	15.0	38.2	30.0	55.0	48.0	120.0
LY0002-2091	A-SC500-16	17.0	38.2	30.0	55.0	48.0	120.0
LY0002-2092	A-SC500-20	21.0	38.2	30.0	55.0	48.0	120.0
LY0002-2093	A-SC630-10	10.5	44.1	35.0	63.5	56.0	140.0
LY0002-2094	A-SC630-12	13.0	44.1	35.0	63.5	56.0	140.0
LY0002-2095	A-SC630-14	15.0	44.1	35.0	63.5	56.0	140.0
LY0002-2096	A-SC630-16	17.0	44.1	35.0	63.5	56.0	140.0
LY0002-2097	A-SC630-20	21.0	44.1	35.0	63.5	56.0	140.0

B-SC COPPER TUBE TERMINALS B-SC銅管端子 UL:E357535





- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-3001	B-SC1.5-4	4.2	3.4	1.8	8.0	5.0	16.0
LY0002-3002	B-SC1.5-5	5.2	3.4	1.8	10.0	5.0	17.0
LY0002-3003	B-SC1.5-6	6.5	3.4	1.8	10.0	5.0	18.0
LY0002-3004	B-SC2.5-4	4.2	3.7	2.4	8.0	7.0	18.0
LY0002-3005	B-SC2.5-5	5.2	3.7	2.4	10.0	7.0	20.0
LY0002-3006	B-SC2.5-6	6.5	3.7	2.4	10.0	7.0	20.0
LY0002-3007	B-SC2.5-8	8.4	3.7	2.4	12.5	7.0	23.0
LY0002-3008	B-SC4-4	4.2	4.5	3.1	10.0	7.0	20.0
LY0002-3009	B-SC4-5	5.2	4.5	3.1	10.0	7.0	20.0
LY0002-3010	B-SC4-6	6.5	4.5	3.1	10.0	7.0	20.0
LY0002-3011	B-SC4-8	8.4	4.5	3.1	12.5	7.0	23.0
LY0002-3012	B-SC6-4	4.2	5.2	3.8	10.0	9.0	24.0
LY0002-3013	B-SC6-5	5.2	5.2	3.8	10.0	9.0	24.0
LY0002-3014	B-SC6-6	6.5	5.2	3.8	12.0	9.0	24.0
LY0002-3015	B-SC6-8	8.4	5.2	3.8	12.5	9.0	26.0
LY0002-3016	B-SC6-10	10.5	5.9	4.0	15.0	9.0	28.0
LY0002-3017	B-SC10-5	5.2	5.9	4.5	12.0	9.0	25.0
LY0002-3018	B-SC10-6	6.5	5.9	4.5	12.0	9.0	25.0
LY0002-3019	B-SC10-8	8.4	5.9	4.5	12.5	9.0	27.0
LY0002-3020	B-SC10-10	10.5	5.9	4.5	15.0	9.0	29.0
LY0002-3021	B-SC10-12	13.0	5.9	4.5	17.0	9.0	31.0
LY0002-3022	B-SC16-5	5.2	6.8	5.4	12.0	12.0	30.0
LY0002-3023	B-SC16-6	6.5	6.8	5.4	12.0	12.0	30.0
LY0002-3024	B-SC16-8	8.4	6.8	5.4	12.5	12.0	30.0
LY0002-3025	B-SC16-10	10.5	6.8	5.4	16.0	12.0	33.0
LY0002-3026	B-SC16-12	13.0	6.8	5.4	17.0	12.0	35.0
LY0002-3027	B-SC25-5	5.2	8.4	6.8	13.0	12.0	33.0
LY0002-3028	B-SC25-6	6.5	8.4	6.8	13.0	12.0	33.0
LY0002-3029	B-SC25-8	8.4	8.4	6.8	15.0	12.0	33.0
LY0002-3030	B-SC25-10	10.5	8.4	6.8	18.0	12.0	34.0
LY0002-3031	B-SC25-12	13.0	8.4	6.8	18.0	12.0	35.0
LY0002-3032	B-SC25-14	15.0	8.4	6.8	20.0	12.0	38.0
LY0002-3033	B-SC35-5	5.2	10.2	8.2	16.0	14.0	38.0
LY0002-3034	B-SC35-6	6.5	10.2	8.2	16.0	14.0	38.0
LY0002-3035	B-SC35-8	8.4	10.2	8.2	16.0	14.0	38.0
LY0002-3036	B-SC35-10	10.5	10.2	8.2	18.0	14.0	39.0
LY0002-3037	B-SC35-12	13.0	10.2	8.2	19.0	14.0	40.5
LY0002-3038	B-SC35-14	15.0	10.2	8.2	20.0	14.0	42.0
LY0002-3039	B-SC50-6	6.5	11.9	9.5	17.5	16.0	45.0
LY0002-3040	B-SC50-8	8.4	11.9	9.5	17.5	16.0	45.0
LY0002-3041	B-SC50-10	10.5	11.9	9.5	17.5	16.0	45.0
LY0002-3042	B-SC50-12	13.0	11.9	9.5	20.0	16.0	45.0
LY0002-3043	B-SC50-14	15.0	11.9	9.5	22.0	16.0	46.0
LY0002-3044	B-SC50-16	17.0	11.9	9.5	24.0	16.0	47.0
LY0002-3045	B-SC70-8	8.4	14.0	11.2	20.5	20.0	52.0
LY0002-3046	B-SC70-10	10.5	14.0	11.2	20.5	20.0	52.0
LY0002-3047	B-SC70-12	13.0	14.0	11.2	20.5	20.0	52.0
LY0002-3048	B-SC70-14	15.0	14.0	11.2	20.5	20.0	52.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-3049	B-SC70-16	17.0	14.1	11.2	25.0	20.0	53.0
LY0002-3050	B-SC95-8	8.4	16.7	13.5	24.5	23.0	58.0
LY0002-3051	B-SC95-10	10.5	16.7	13.5	24.5	23.0	58.0
LY0002-3052	B-SC95-12	13.0	16.7	13.5	24.5	23.0	58.0
LY0002-3053	B-SC95-14	15.0	16.7	13.5	24.5	23.0	58.0
LY0002-3054	B-SC95-16	17.0	16.7	13.5	24.5	23.0	58.0
LY0002-3055	B-SC120-8	8.4	18.6	15.0	27.0	22.0	63.0
LY0002-3056	B-SC120-10	10.5	18.6	15.0	27.0	22.0	63.0
LY0002-3057	B-SC120-12	13.0	18.6	15.0	27.0	22.0	63.0
LY0002-3058	B-SC120-14	15.0	18.6	15.0	27.0	22.0	63.0
LY0002-3059	B-SC120-16	17.0	18.6	15.0	27.0	22.0	63.0
LY0002-3060	B-SC120-20	21.0	18.6	15.0	27.0	22.0	63.0
LY0002-3061	B-SC150-8	8.4	20.4	16.5	30.0	26.0	70.0
LY0002-3062	B-SC150-10	10.5	20.4	16.5	30.0	26.0	70.0
LY0002-3063	B-SC150-12	13.0	20.4	16.5	30.0	26.0	70.0
LY0002-3064	B-SC150-14	15.0	20.4	16.5	30.0	26.0	70.0
LY0002-3065	B-SC150-16	17.0	20.4	16.5	30.0	26.0	70.0
LY0002-3066	B-SC150-20	21.0	20.4	16.5	30.0	26.0	70.0
LY0002-3067	B-SC185-10	10.5	22.6	18.5	33.0	32.0	75.0
LY0002-3068	B-SC185-12	13.0	22.6	18.5	33.0	32.0	75.0
LY0002-3069	B-SC185-14	15.0	22.6	18.5	33.0	32.0	75.0
LY0002-3070	B-SC185-16	17.0	22.6	18.5	33.0	32.0	75.0
LY0002-3071	B-SC185-20	21.0	22.6	18.5	33.0	32.0	75.0
LY0002-3072	B-SC240-10	10.5	25.5	21.0	37.2	38.0	90.0
LY0002-3073	B-SC240-12	13.0	25.5	21.0	37.2	38.0	90.0
LY0002-3074	B-SC240-14	15.0	25.5	21.0	37.2	38.0	90.0
LY0002-3075	B-SC240-16	17.0	25.5	21.0	37.2	38.0	90.0
LY0002-3076	B-SC240-20	21.0	25.5	21.0	37.2	38.0	90.0
LY0002-3077	B-SC300-10	10.5	28.8	23.5	42.0	42.0	98.0
LY0002-3078	B-SC300-12	13.0	28.8	23.5	42.0	42.0	98.0
LY0002-3079	B-SC300-14	15.0	28.8	23.5	42.0	42.0	98.0
LY0002-3080	B-SC300-16	17.0	28.8	23.5	42.0	42.0	98.0
LY0002-3081	B-SC300-20	21.0	28.8	23.5	42.0	42.0	98.0
LY0002-3082	B-SC400-10	10.5	35.1	28.5	51.0	44.0	110.0
LY0002-3083	B-SC400-12	13.0	35.1	28.5	51.0	44.0	110.0
LY0002-3084	B-SC400-14	15.0	35.1	28.5	51.0	44.0	110.0
LY0002-3085	B-SC400-16	17.0	35.1	28.5	51.0	44.0	110.0
LY0002-3086	B-SC400-20	21.0	35.1	28.5	51.0	44.0	110.0
LY0002-3087	B-SC500-10	10.5	37.4	30.0	54.5	48.0	120.0
LY0002-3088	B-SC500-12	13.0	37.4	30.0	54.5	48.0	120.0
LY0002-3089	B-SC500-14	15.0	37.4	30.0	54.5	48.0	120.0
LY0002-3090	B-SC500-16	17.0	37.4	30.0	54.5	48.0	120.0
LY0002-3091	B-SC500-20	21.0	37.4	30.0	54.5	48.0	120.0
LY0002-3092	B-SC630-10	10.5	43.2	35.0	63.0	56.0	140.0
LY0002-3093	B-SC630-12	13.0	43.2	35.0	63.0	56.0	140.0
LY0002-3094	B-SC630-14	15.0	43.2	35.0	63.0	56.0	140.0
LY0002-3095	B-SC630-16	17.0	43.2	35.0	63.0	56.0	140.0
LY0002-3096	B-SC630-20	21.0	43.2	35.0	63.0	56.0	140.0

C-SC COPPER TUBE TERMINALS C-SC銅管端子 UL:E357535





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-4001	C-SC1.5-4	4.2	3.3	1.8	8.0	5.0	16.0
LY0002-4002	C-SC1.5-5	5.2	3.3	1.8	10.0	5.0	17.0
LY0002-4003	C-SC1.5-6	6.5	3.3	1.8	10.0	5.0	18.0
LY0002-4004	C-SC2.5-4	4.2	3.6	2.4	8.0	7.0	18.0
LY0002-4005	C-SC2.5-5	5.2	3.6	2.4	10.0	7.0	20.0
LY0002-4006	C-SC2.5-6	6.5	3.6	2.4	10.0	7.0	20.0
LY0002-4007	C-SC2.5-8	8.4	3.6	2.4	12.5	7.0	23.0
LY0002-4008	C-SC4-4	4.2	4.4	3.1	10.0	7.0	20.0
LY0002-4009	C-SC4-5	5.2	4.4	3.1	10.0	7.0	20.0
LY0002-4010	C-SC4-6	6.5	4.4	3.1	10.0	7.0	20.0
LY0002-4011	C-SC4-8	8.4	4.4	3.1	12.5	7.0	23.0
LY0002-4012	C-SC6-4	4.2	5.1	3.8	10.0	9.0	24.0
LY0002-4013	C-SC6-5	5.2	5.1	3.8	10.0	9.0	24.0
LY0002-4014	C-SC6-6	6.5	5.1	3.8	12.0	9.0	24.0
LY0002-4015	C-SC6-8	8.4	5.1	3.8	12.5	9.0	26.0
LY0002-4016	C-SC6-10	10.5	5.7	4.0	15.0	9.0	28.0
LY0002-4017	C-SC10-5	5.2	5.8	4.5	12.0	9.0	25.0
LY0002-4018	C-SC10-6	6.5	5.8	4.5	12.0	9.0	25.0
LY0002-4019	C-SC10-8	8.4	5.8	4.5	12.5	9.0	27.0
LY0002-4020	C-SC10-10	10.5	5.8	4.5	15.0	9.0	29.0
LY0002-4021	C-SC10-12	13.0	5.8	4.5	17.0	9.0	31.0
LY0002-4022	C-SC16-5	5.2	6.6	5.4	12.0	12.0	30.0
LY0002-4023	C-SC16-6	6.5	6.6	5.4	12.0	12.0	30.0
LY0002-4024	C-SC16-8	8.4	6.6	5.4	12.5	12.0	30.0
LY0002-4025	C-SC16-10	10.5	6.6	5.4	16.0	12.0	33.0
LY0002-4026	C-SC16-12	13.0	6.6	5.4	17.0	12.0	35.0
LY0002-4027	C-SC25-5	5.2	8.3	6.8	13.0	12.0	33.0
LY0002-4028	C-SC25-6	6.5	8.3	6.8	13.0	12.0	33.0
LY0002-4029	C-SC25-8	8.4	8.3	6.8	15.0	12.0	33.0
LY0002-4030	C-SC25-10	10.5	8.3	6.8	18.0	12.0	34.0
LY0002-4031	C-SC25-12	13.0	8.3	6.8	18.0	12.0	35.0
LY0002-4032	C-SC25-14	15.0	8.3	6.8	20.0	12.0	38.0
LY0002-4033	C-SC35-5	5.2	10.0	8.2	16.0	14.0	38.0
LY0002-4034	C-SC35-6	6.5	10.0	8.2	16.0	14.0	38.0
LY0002-4035	C-SC35-8	8.4	10.0	8.2	16.0	14.0	38.0
LY0002-4036	C-SC35-10	10.5	10.0	8.2	18.0	14.0	39.0
LY0002-4037	C-SC35-12	13.0	10.0	8.2	19.0	14.0	40.5
LY0002-4038	C-SC35-14	15.0	10.0	8.2	20.0	14.0	42.0
LY0002-4039	C-SC50-6	6.5	11.6	9.5	17.0	16.0	45.0
LY0002-4040	C-SC50-8	8.4	11.6	9.5	17.0	16.0	45.0
LY0002-4041	C-SC50-10	10.5	11.6	9.5	17.0	16.0	45.0
LY0002-4042	C-SC50-12	13.0	11.6	9.5	20.0	16.0	45.0
LY0002-4043	C-SC50-14	15.0	11.6	9.5	22.0	16.0	46.0
LY0002-4044	C-SC50-16	17.0	11.6	9.5	24.0	16.0	47.0
LY0002-4045	C-SC70-8	8.4	13.8	11.2	20.4	20.0	52.0
LY0002-4046	C-SC70-10	10.5	13.8	11.2	20.4	20.0	52.0
LY0002-4047	C-SC70-12	13.0	13.8	11.2	20.4	20.0	52.0
LY0002-4048	C-SC70-14	15.0	13.8	11.2	20.4	20.0	52.0

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0002-4049	C-SC70-16	17.0	13.8	11.2	25.0	20.0	53.0
LY0002-4050	C-SC95-8	8.4	16.4	13.5	24.0	23.0	58.0
LY0002-4051	C-SC95-10	10.5	16.4	13.5	24.0	23.0	58.0
LY0002-4052	C-SC95-12	13.0	16.4	13.5	24.0	23.0	58.0
LY0002-4053	C-SC95-14	15.0	16.4	13.5	24.0	23.0	58.0
LY0002-4054	C-SC95-16	17.0	16.4	13.5	24.0	23.0	58.0
LY0002-4055	C-SC120-8	8.4	18.2	15.0	27.0	22.0	63.0
LY0002-4056	C-SC120-10	10.5	18.2	15.0	27.0	22.0	63.0
LY0002-4057	C-SC120-12	13.0	18.2	15.0	27.0	22.0	63.0
LY0002-4058	C-SC120-14	15.0	18.2	15.0	27.0	22.0	63.0
LY0002-4059	C-SC120-16	17.0	18.2	15.0	27.0	22.0	63.0
LY0002-4060	C-SC120-20	21.0	18.2	15.0	27.0	22.0	63.0
LY0002-4061	C-SC150-8	8.4	19.9	16.5	29.5	26.0	70.0
LY0002-4062	C-SC150-10	10.5	19.9	16.5	29.5	26.0	70.0
LY0002-4063	C-SC150-12	13.0	19.9	16.5	29.5	26.0	70.0
LY0002-4064	C-SC150-14	15.0	19.9	16.5	29.5	26.0	70.0
LY0002-4065	C-SC150-16	17.0	19.9	16.5	29.5	26.0	70.0
LY0002-4066	C-SC150-20	21.0	19.9	16.5	29.5	26.0	70.0
LY0002-4067	C-SC185-10	10.5	22.1	18.5	32.5	32.0	75.0
LY0002-4068	C-SC185-12	13.0	22.1	18.5	32.5	32.0	75.0
LY0002-4069	C-SC185-14	15.0	22.1	18.5	32.5	32.0	75.0
LY0002-4070	C-SC185-16	17.0	22.1	18.5	32.5	32.0	75.0
LY0002-4071	C-SC185-20	21.0	22.1	18.5	32.5	32.0	75.0
LY0002-4072	C-SC240-10	10.5	25.0	21.0	37.0	38.0	90.0
LY0002-4073	C-SC240-12	13.0	25.0	21.0	37.0	38.0	90.0
LY0002-4074	C-SC240-14	15.0	25.0	21.0	37.0	38.0	90.0
LY0002-4075	C-SC240-16	17.0	25.0	21.0	37.0	38.0	90.0
LY0002-4076	C-SC240-20	21.0	25.0	21.0	37.0	38.0	90.0
LY0002-4077	C-SC300-10	10.5	28.2	23.5	41.5	42.0	98.0
LY0002-4078	C-SC300-12	13.0	28.2	23.5	41.5	42.0	98.0
LY0002-4079	C-SC300-14	15.0	28.2	23.5	41.5	42.0	98.0
LY0002-4080	C-SC300-16	17.0	28.2	23.5	41.5	42.0	98.0
LY0002-4081	C-SC300-20	21.0	28.2	23.5	41.5	42.0	98.0
LY0002-4082	C-SC400-10	10.5	34.3	28.5	50.5	44.0	110.0
LY0002-4083	C-SC400-12	13.0	34.3	28.5	50.5	44.0	110.0
LY0002-4084	C-SC400-14	15.0	34.3	28.5	50.5	44.0	110.0
LY0002-4085	C-SC400-16	17.0	34.3	28.5	50.5	44.0	110.0
LY0002-4086	C-SC400-20	21.0	34.3	28.5	50.5	44.0	110.0
LY0002-4087	C-SC500-10	10.5	36.5	30.0	53.5	48.0	120.0
LY0002-4088	C-SC500-12	13.0	36.5	30.0	53.5	48.0	120.0
LY0002-4089	C-SC500-14	15.0	36.5	30.0	53.5	48.0	120.0
LY0002-4090	C-SC500-16	17.0	36.5	30.0	53.5	48.0	120.0
LY0002-4091	C-SC500-20	21.0	36.5	30.0	53.5	48.0	120.0
LY0002-4092	C-SC630-10	10.5	42.2	35.0	62.5	56.0	140.0
LY0002-4093	C-SC630-12	13.0	42.2	35.0	62.5	56.0	140.0
LY0002-4094	C-SC630-14	15.0	42.2	35.0	62.5	56.0	140.0
LY0002-4095	C-SC630-16	17.0	42.2	35.0	62.5	56.0	140.0
LY0002-4096	C-SC630-20	21.0	42.2	35.0	62.5	56.0	140.0

SC-XB COPPER TUBE TERMINALS SC-XB銅管端子 UL:E357535





◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-5001	SC-XB1.5-4	4.3	4.0	2.2	8.0	5.0	16.5
LY0002-5002	SC-XB1.5-5	5.3	4.0	2.2	8.0	5.0	16.5
LY0002-5003	SC-XB2.5-4	4.3	4.5	2.9	8.0	7.0	19.0
LY0002-5004	SC-XB2.5-5	5.3	4.5	2.9	8.0	7.0	21.0
LY0002-5005	SC-XB2.5-6	6.4	4.5	2.9	10.0	7.0	21.0
LY0002-5006	SC-XB2.5-8	8.4	4.5	2.9	13.0	7.0	23.0
LY0002-5007	SC-XB4-4	4.3	5.2	3.6	10.0	7.0	21.0
LY0002-5008	SC-XB4-5	5.3	5.2	3.6	10.0	7.0	21.0
LY0002-5009	SC-XB4-6	6.4	5.2	3.6	10.0	7.0	21.0
LY0002-5010	SC-XB4-8	8.4	5.2	3.6	13.0	7.0	24.0
LY0002-5011	SC-XB6-4	4.3	6.0	4.2	10.0	9.0	23.5
LY0002-5012	SC-XB6-5	5.3	6.0	4.2	10.0	9.0	23.5
LY0002-5013	SC-XB6-6	6.4	6.0	4.2	10.0	9.0	26.0
LY0002-5014	SC-XB6-8	8.4	6.0	4.2	12.0	9.0	26.0
LY0002-5015	SC-XB6-10	10.5	6.0	4.2	16.0	9.0	34.0
LY0002-5016	SC-XB10-5	5.3	7.0	5.0	12.4	9.0	27.0
LY0002-5017	SC-XB10-6	6.4	7.0	5.0	12.4	9.0	27.0
LY0002-5018	SC-XB10-8	8.4	7.0	5.0	12.4	9.0	28.0
LY0002-5019	SC-XB10-10	10.5	7.0	5.0	18.0	9.0	34.5
LY0002-5020	SC-XB10-12	13.0	7.0	5.0	18.5	9.0	39.5
LY0002-5021	SC-XB16-4	4.3	7.8	5.8	12.4	12.0	31.0
LY0002-5022	SC-XB16-5	5.3	7.8	5.8	12.4	12.0	31.0
LY0002-5023	SC-XB16-6	6.4	7.8	5.8	12.4	12.0	31.0
LY0002-5024	SC-XB16-8	8.4	7.8	5.8	12.4	12.0	31.0
LY0002-5025	SC-XB16-10	10.5	7.8	5.8	16.0	12.0	34.0
LY0002-5026	SC-XB16-12	13.0	7.8	5.8	19.5	12.0	42.0
LY0002-5027	SC-XB25-5	5.3	9.5	7.5	14.0	12.0	32.0
LY0002-5028	SC-XB25-6	6.4	9.5	7.5	14.0	12.0	32.0
LY0002-5029	SC-XB25-8	8.4	9.5	7.5	18.0	12.0	34.0
LY0002-5030	SC-XB25-10	10.5	9.5	7.5	17.5	12.0	37.0
LY0002-5031	SC-XB25-12	13.0	9.5	7.5	20.5	12.0	45.0
LY0002-5032	SC-XB35-6	6.4	11.4	8.6	16.5	15.0	38.0
LY0002-5033	SC-XB35-8	8.4	11.4	8.6	16.5	15.0	38.0
LY0002-5034	SC-XB35-10	10.5	11.4	8.6	17.5	15.0	41.0
LY0002-5035	SC-XB35-12	13.0	11.4	8.6	18.0	15.0	47.5
LY0002-5036	SC-XB50-6	6.4	12.6	9.6	18.0	16.0	43.5
LY0002-5037	SC-XB50-8	8.4	12.6	9.6	18.0	16.0	44.0
LY0002-5038	SC-XB50-10	10.5	12.6	9.6	18.0	16.0	44.0
LY0002-5039	SC-XB50-12	13.0	12.6	9.6	18.0	16.0	44.0
LY0002-5040	SC-XB50-14	15.0	12.6	9.6	25.0	16.0	55.5
LY0002-5041	SC-XB50-16	17.0	12.6	9.6	26.0	16.0	60.0
LY0002-5042	SC-XB70-6	6.4	15.0	12.0	21.8	18.0	50.0
LY0002-5043	SC-XB70-8	8.4	15.0	12.0	21.8	18.0	50.0
LY0002-5044	SC-XB70-10	10.5	15.0	12.0	21.8	18.0	50.0
LY0002-5045	SC-XB70-12	13.0	15.0	12.0	21.8	18.0	50.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0002-5046	SC-XB70-14	15.0	15.0	12.0	21.8	18.0	59.0
LY0002-5047	SC-XB70-16	17.0	15.0	12.0	26.0	18.0	63.0
LY0002-5048	SC-XB95-5	5.3	17.4	13.5	25.0	20.0	55.5
LY0002-5049	SC-XB95-6	6.4	17.4	13.5	25.0	20.0	55.5
LY0002-5050	SC-XB95-8	8.4	17.4	13.5	25.0	20.0	55.5
LY0002-5051	SC-XB95-10	10.5	17.4	13.5	25.0	20.0	55.0
LY0002-5052	SC-XB95-12	13.0	17.4	13.5	25.0	20.0	55.5
LY0002-5053	SC-XB95-14	15.0	17.4	13.5	25.0	20.0	65.0
LY0002-5054	SC-XB95-16	17.0	17.4	13.5	27.0	20.0	69.5
LY0002-5055	SC-XB95-20	21.0	17.4	13.5	29.0	20.0	77.5
LY0002-5056	SC-XB120-8	8.4	19.8	15.0	28.4	22.0	60.0
LY0002-5057	SC-XB120-10	10.5	19.8	15.0	28.4	22.0	60.0
LY0002-5058	SC-XB120-12	13.0	19.8	15.0	28.4	22.0	60.0
LY0002-5059	SC-XB120-14	15.0	19.8	15.0	28.4	22.0	64.0
LY0002-5060	SC-XB120-16	17.0	19.8	15.0	28.4	22.0	64.0
LY0002-5061	SC-XB150-6	6.4	21.2	16.5	30.5	26.0	69.0
LY0002-5062	SC-XB150-8	8.4	21.2	16.5	30.5	26.0	69.0
LY0002-5063	SC-XB150-10	10.5	21.2	16.5	30.5	26.0	69.0
LY0002-5064	SC-XB150-12	13.0	21.2	16.5	30.5	26.0	69.0
LY0002-5065	SC-XB150-14	15.0	21.2	16.5	30.5	26.0	69.0
LY0002-5066	SC-XB150-16	17.0	21.2	16.5	30.5	26.0	69.0
LY0002-5067	SC-XB150-20	21.0	21.2	16.5	30.5	26.0	69.0
LY0002-5068	SC-XB185-10	10.5	23.5	18.5	34.0	32.0	78.0
LY0002-5069	SC-XB185-12	13.0	23.5	18.5	34.0	32.0	78.0
LY0002-5070	SC-XB185-14	15.0	23.5	18.5	34.0	32.0	78.0
LY0002-5071	SC-XB185-16	17.0	23.5	18.5	34.0	32.0	78.0
LY0002-5072	SC-XB185-20	21.0	23.5	18.5	34.0	32.0	78.0
LY0002-5073	SC-XB240-10	10.5	26.5	21.5	38.5	38.0	92.0
LY0002-5074	SC-XB240-12	13.0	26.5	21.5	38.5	38.0	92.0
LY0002-5075	SC-XB240-14	15.0	26.5	21.5	38.5	38.0	92.0
LY0002-5076	SC-XB240-16	17.0	26.5	21.5	38.5	38.0	92.0
LY0002-5077	SC-XB240-20	21.0	26.5	21.5	38.5	38.0	92.0
LY0002-5078	SC-XB300-12	13.0	30.0	23.5	43.0	42.0	101.0
LY0002-5079	SC-XB300-14	15.0	30.0	23.5	43.0	42.0	101.0
LY0002-5080	SC-XB300-16	17.0	30.0	23.5	43.0	42.0	101.0
LY0002-5081	SC-XB300-18	19.0	30.0	23.5	43.0	42.0	101.0
LY0002-5082	SC-XB300-20	21.0	30.0	23.5	43.0	42.0	101.0
LY0002-5083	SC-XB400-12	13.0	36.5	28.5	52.0	44.0	114.0
LY0002-5084	SC-XB400-16	17.0	36.5	28.5	52.0	44.0	114.0
LY0002-5085	SC-XB400-18	19.0	36.5	28.5	52.0	44.0	114.0
LY0002-5086	SC-XB400-20	21.0	36.5	28.5	52.0	44.0	114.0
LY0002-5087	SC-XB500-16	17.0	39.0	30.5	56.0	48.0	124.0
LY0002-5088	SC-XB500-18	19.0	39.0	30.5	56.0	48.0	124.0
LY0002-5089	SC-XB500-20	21.0	39.0	30.5	56.0	48.0	124.0
LY0002-5090	SC-XB600-20	21.0	55.0	45.0	65.0	56.0	144.0

GC COPPER TUBE TERMINALS GC銅管端子 UL:E357535





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0003-0001	GC1.5-3	3.2	3.7	1.8	8.0	6.0	16.0
LY0003-0002	GC1.5-4	4.3	3.7	1.8	8.0	6.0	17.0
LY0003-0003	GC1.5-5	5.3	3.7	1.8	10.0	7.0	19.0
LY0003-0004	GC1.5-6	6.5	3.7	1.8	10.0	7.0	20.0
LY0003-0005	GC2.5-3	3.2	3.9	2.3	8.0	7.0	17.0
LY0003-0006	GC2.5-4	4.3	3.9	2.3	8.0	7.0	18.0
LY0003-0007	GC2.5-5	5.3	3.9	2.3	10.0	7.0	20.0
LY0003-0008	GC2.5-6	6.5	3.9	2.3	10.0	7.0	20.0
LY0003-0009	GC2.5-8	8.3	4.3	2.3	12.5	7.0	22.5
LY0003-0010	GC4-4	4.3	4.7	3.0	10.0	8.0	21.0
LY0003-0011	GC4-5	5.3	4.7	3.0	10.0	8.0	22.0
LY0003-0012	GC4-6	6.5	4.7	3.0	10.0	8.0	23.0
LY0003-0013	GC4-8	8.3	4.7	3.0	12.5	8.0	24.0
LY0003-0014	GC6-4	4.3	5.9	4.0	10.0	9.5	24.6
LY0003-0015	GC6-5	5.3	5.9	4.0	10.0	9.5	24.6
LY0003-0016	GC6-6	6.5	5.9	4.0	11.0	9.5	24.6
LY0003-0017	GC6-8	8.3	5.9	4.0	12.5	9.5	27.3
LY0003-0018	GC6-10	10.3	6.2	4.0	15.0	9.5	28.3
LY0003-0019	A-GC10-4	4.3	6.6	4.5	11.0	13.0	30.0
LY0003-0020	A-GC10-5	5.3	6.6	4.5	11.0	13.0	30.0
LY0003-0021	A-GC10-6	6.5	6.6	4.5	11.0	13.0	30.0
LY0003-0022	A-GC10-8	8.3	6.6	4.5	12.5	13.0	30.0
LY0003-0023	A-GC10-10	10.3	6.9	4.5	16.0	13.0	34.1
LY0003-0024	A-GC10-12	12.7	6.9	4.5	18.0	12.0	34.1
LY0003-0025	A-GC16-5	5.3	7.5	5.5	11.0	14.0	30.7
LY0003-0026	A-GC16-6	6.5	7.5	5.5	11.0	14.0	30.7
LY0003-0027	A-GC16-8	8.3	7.5	5.5	12.5	13.0	30.7
LY0003-0028	A-GC16-10	10.3	7.5	5.5	16.0	14.0	35.9
LY0003-0029	A-GC16-12	12.7	8.1	5.5	18.0	13.0	35.9
LY0003-0030	A-GC25-5	5.3	9.1	6.7	13.0	13.0	32.2
LY0003-0031	A-GC25-6	6.5	9.1	6.7	13.0	13.0	32.2
LY0003-0032	A-GC25-8	8.3	9.1	6.7	13.0	13.0	32.2
LY0003-0033	A-GC25-10	10.3	9.1	6.7	16.0	14.0	36.9
LY0003-0034	A-GC25-12	12.7	9.1	6.7	18.0	13.0	36.9
LY0003-0035	A-GC25-14	14.8	9.1	6.7	20.0	13.0	38.9
LY0003-0036	A-GC35-5	5.3	11.0	8.6	16.0	16.0	37.6
LY0003-0037	A-GC35-6	6.5	11.0	8.6	16.0	16.0	37.6
LY0003-0038	A-GC35-8	8.3	11.0	8.6	16.0	16.0	37.6
LY0003-0039	A-GC35-10	10.3	11.0	8.6	17.0	17.0	41.5
LY0003-0040	A-GC35-12	12.7	11.0	8.6	18.0	16.0	41.5
LY0003-0041	A-GC35-14	14.8	11.0	8.6	20.0	16.0	43.5
LY0003-0042	A-GC35-16	16.5	11.0	8.6	23.0	16.0	45.5
LY0003-0043	A-GC50-5	5.3	12.4	9.5	18.0	17.0	41.0
LY0003-0044	A-GC50-6	6.5	12.4	9.5	18.0	17.0	41.0
LY0003-0045	A-GC50-8	8.3	12.4	9.5	18.0	17.0	41.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0003-0046	A-GC50-10	10.3	12.4	9.5	18.0	17.0	44.0
LY0003-0047	A-GC50-12	12.7	12.4	9.5	19.0	17.0	44.0
LY0003-0048	A-GC50-14	14.8	12.4	9.5	21.0	19.0	52.8
LY0003-0049	A-GC50-16	16.5	12.4	9.5	23.0	19.0	52.8
LY0003-0050	A-GC70-5	5.3	15.0	12.0	22.0	21.5	52.4
LY0003-0051	A-GC70-6	6.3	15.0	12.0	22.0	21.5	52.4
LY0003-0052	A-GC70-8	8.3	15.0	12.0	22.0	21.5	52.4
LY0003-0053	A-GC70-10	10.3	15.0	12.0	22.0	21.5	52.4
LY0003-0054	A-GC70-12	12.7	15.0	12.0	22.0	21.5	52.4
LY0003-0055	A-GC70-14	14.8	15.0	12.0	22.0	21.5	55.0
LY0003-0056	A-GC70-16	16.5	15.0	12.0	24.0	20.0	55.0
LY0003-0057	A-GC95-8	8.3	17.0	13.4	25.0	22.5	54.7
LY0003-0058	A-GC95-10	10.3	17.0	13.4	25.0	22.5	54.7
LY0003-0059	A-GC95-12	12.7	17.0	13.4	25.0	22.5	54.7
LY0003-0060	A-GC95-14	14.8	17.0	13.4	25.0	22.5	58.3
LY0003-0061	A-GC95-16	16.5	17.0	13.4	25.0	22.5	58.3
LY0003-0062	A-GC120-8	8.3	19.0	15.0	27.5	23.0	60.0
LY0003-0063	A-GC120-10	10.3	19.0	15.0	27.5	23.0	60.0
LY0003-0064	A-GC120-12	12.7	19.0	15.0	27.5	23.0	60.0
LY0003-0065	A-GC120-14	14.8	19.0	15.0	27.5	23.0	64.0
LY0003-0066	A-GC120-16	16.5	19.0	15.0	27.5	23.0	64.0
LY0003-0067	A-GC150-10	10.3	21.2	16.5	30.0	27.0	67.0
LY0003-0068	A-GC150-12	12.7	21.2	16.5	30.0	27.0	67.0
LY0003-0069	A-GC150-14	14.8	21.2	16.5	30.0	27.0	67.0
LY0003-0070	A-GC150-16	16.5	21.2	16.5	30.0	27.0	71.4
LY0003-0071	A-GC150-20	20.9	21.2	16.5	30.0	27.0	71.4
LY0003-0072	A-GC185-10	10.3	23.0	19.0	34.0	30.0	73.0
LY0003-0073	A-GC185-12	12.7	23.0	19.0	34.0	30.0	73.0
LY0003-0074	A-GC185-14	14.8	23.0	19.0	34.0	30.0	73.0
LY0003-0075	A-GC185-16	16.5	23.0	19.0	34.0	30.0	76.2
LY0003-0076	A-GC185-20	20.9	23.0	19.0	34.0	30.0	76.2
LY0003-0077	A-GC240-10	10.3	26.5	21.0	38.6	38.0	91.4
LY0003-0078	A-GC240-12	12.7	26.5	21.0	38.6	38.0	91.4
LY0003-0079	A-GC240-14	14.8	26.5	21.0	38.6	38.0	91.4
LY0003-0080	A-GC240-16	16.5	26.5	21.0	38.6	38.0	91.4
LY0003-0081	A-GC240-20	20.9	26.5	21.0	38.6	38.0	91.4
LY0003-0082	A-GC300-12	12.7	30.0	24.5	43.0	42.0	98.0
LY0003-0083	A-GC300-14	14.8	30.0	24.5	43.0	42.0	98.0
LY0003-0084	A-GC300-16	16.5	30.0	24.5	43.0	42.0	98.0
LY0003-0085	A-GC300-20	20.9	30.0	24.5	43.0	42.0	98.0
LY0003-0086	A-GC400-12	12.7	35.0	27.0	50.0	44.0	104.0
LY0003-0087	A-GC400-14	14.8	35.0	27.0	50.0	44.0	104.0
LY0003-0088	A-GC400-16	16.5	35.0	27.0	50.0	44.0	104.0
LY0003-0089	A-GC400-20	20.9	35.0	27.0	50.0	44.0	104.0

GC WITH BELL-MOUTH COPPER TUBE TERMINALS GC(喇叭口)銅管端子 UL:E357535





◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0003-1001	GC10-4	4.3	6.6	4.5	11.0	13.0	30.0
LY0003-1002	GC10-5	5.3	6.6	4.5	11.0	13.0	30.0
LY0003-1003	GC10-6	6.5	6.6	4.5	11.0	13.0	30.0
LY0003-1004	GC10-8	8.3	6.6	4.5	12.5	13.0	30.0
LY0003-1005	GC10-10	10.3	6.9	4.5	16.0	13.0	34.1
LY0003-1006	GC10-12	12.7	6.9	4.5	18.0	12.0	34.1
LY0003-1007	GC16-5	5.3	7.5	5.5	11.0	14.0	30.7
LY0003-1008	GC16-6	6.5	7.5	5.5	11.0	14.0	30.7
LY0003-1009	GC16-8	8.3	7.5	5.5	12.5	13.0	30.7
LY0003-1010	GC16-10	10.3	7.5	5.5	16.0	14.0	35.9
LY0003-1011	GC16-12	12.7	8.1	5.5	18.0	13.0	35.9
LY0003-1012	GC25-5	5.3	9.1	6.7	13.0	13.0	32.2
LY0003-1013	GC25-6	6.5	9.1	6.7	13.0	13.0	32.2
LY0003-1014	GC25-8	8.3	9.1	6.7	13.0	13.0	32.2
LY0003-1015	GC25-10	10.3	9.1	6.7	16.0	14.0	36.9
LY0003-1016	GC25-12	12.7	9.1	6.7	18.0	13.0	36.9
LY0003-1017	GC25-14	14.8	9.1	6.7	20.0	13.0	38.9
LY0003-1018	GC35-5	5.3	11.0	8.6	16.0	16.0	37.6
LY0003-1019	GC35-6	6.5	11.0	8.6	16.0	16.0	37.6
LY0003-1020	GC35-8	8.3	11.0	8.6	16.0	16.0	37.6
LY0003-1021	GC35-10	10.3	11.0	8.6	17.0	16.0	41.5
LY0003-1022	GC35-12	12.7	11.0	8.6	18.0	16.0	41.5
LY0003-1023	GC35-14	14.8	11.0	8.6	20.0	16.0	43.5
LY0003-1024	GC35-16	16.5	11.0	8.6	23.0	16.0	45.5
LY0003-1025	GC50-5	5.3	12.4	9.5	18.0	17.0	41.0
LY0003-1026	GC50-6	6.5	12.4	9.5	18.0	17.0	41.0
LY0003-1027	GC50-8	8.3	12.4	9.5	18.0	17.0	41.0
LY0003-1028	GC50-10	10.3	12.4	9.5	18.0	17.0	44.0
LY0003-1029	GC50-12	12.7	12.4	9.5	19.0	17.0	44.0
LY0003-1030	GC50-14	14.8	12.4	9.5	21.0	19.0	52.8
LY0003-1031	GC50-16	16.5	12.4	9.5	23.0	19.0	52.8
LY0003-1032	GC70-5	5.3	15.0	12.0	22.0	21.5	52.4
LY0003-1033	GC70-6	6.3	15.0	12.0	22.0	21.5	52.4
LY0003-1034	GC70-8	8.3	15.0	12.0	22.0	21.5	52.4
LY0003-1035	GC70-10	10.3	15.0	12.0	22.0	21.5	52.4

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0003-1036	GC70-12	12.7	15.0	12.0	22.0	21.5	52.4
LY0003-1037	GC70-14	14.8	15.0	12.0	22.0	21.5	55.0
LY0003-1038	GC70-16	16.5	15.0	12.0	24.0	20.0	55.0
LY0003-1039	GC95-8	8.3	17.0	13.4	25.0	22.5	54.7
LY0003-1040	GC95-10	10.3	17.0	13.4	25.0	22.5	54.7
LY0003-1041	GC95-12	12.7	17.0	13.4	25.0	22.5	54.7
LY0003-1042	GC95-14	14.8	17.0	13.4	25.0	22.5	58.3
LY0003-1043	GC95-16	16.5	17.0	13.4	25.0	22.5	58.3
LY0003-1044	GC120-8	8.3	19.0	15.0	27.5	23.0	60.0
LY0003-1045	GC120-10	10.3	19.0	15.0	27.5	23.0	60.0
LY0003-1046	GC120-12	12.7	19.0	15.0	27.5	23.0	60.0
LY0003-1047	GC120-14	14.8	19.0	15.0	27.5	23.0	64.0
LY0003-1048	GC120-16	16.5	19.0	15.0	27.5	23.0	64.0
LY0003-1049	GC150-10	10.3	21.2	16.5	30.0	27.0	67.0
LY0003-1050	GC150-12	12.7	21.2	16.5	30.0	27.0	67.0
LY0003-1051	GC150-14	14.8	21.2	16.5	30.0	27.0	67.0
LY0003-1052	GC150-16	16.5	21.2	16.5	30.0	27.0	71.4
LY0003-1053	GC150-20	20.9	21.2	16.5	30.0	27.0	71.4
LY0003-1054	GC185-10	10.3	23.0	19.0	34.0	30.0	73.0
LY0003-1055	GC185-12	12.7	23.0	19.0	34.0	30.0	73.0
LY0003-1056	GC185-14	14.8	23.0	19.0	34.0	30.0	73.0
LY0003-1057	GC185-16	16.5	23.0	19.0	34.0	30.0	76.2
LY0003-1058	GC185-20	20.9	23.0	19.0	34.0	30.0	76.2
LY0003-1059	GC240-10	10.3	26.5	21.0	38.6	38.0	91.4
LY0003-1060	GC240-12	12.7	26.5	21.0	38.6	38.0	91.4
LY0003-1061	GC240-14	14.8	26.5	21.0	38.6	38.0	91.4
LY0003-1062	GC240-16	16.5	26.5	21.0	38.6	38.0	91.4
LY0003-1063	GC240-20	20.9	26.5	21.0	38.6	38.0	91.4
LY0003-1064	GC300-12	12.7	30.0	24.5	43.8	42.0	98.0
LY0003-1065	GC300-14	14.8	30.0	24.5	43.8	42.0	98.0
LY0003-1066	GC300-16	16.5	30.0	24.5	43.8	42.0	98.0
LY0003-1067	GC300-20	20.9	30.0	24.5	43.8	42.0	98.0
LY0003-1068	GC400-12	12.7	35.0	27.0	50.0	44.0	104.0
LY0003-1069	GC400-14	14.8	35.0	27.0	50.0	44.0	104.0
LY0003-1070	GC400-16	16.5	35.0	27.0	50.0	44.0	104.0
LY0003-1071	GC400-20	20.9	35.0	27.0	50.0	44.0	104.0

GCL WITH LONG BARREL COPPER TUBE TERMINALS GCL 銅管端子





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ΦE	ΦD	Φd	W	B	L
LY0003-2001	GCL1.5-3	3.2	3.7	1.8	8.0	11.0	21.0
LY0003-2002	GCL1.5-4	4.3	3.7	1.8	8.0	11.0	22.0
LY0003-2003	GCL1.5-5	5.3	3.7	1.8	10.0	12.0	24.0
LY0003-2004	GCL1.5-6	6.5	3.7	1.8	10.0	12.0	25.0
LY0003-2005	GCL2.5-3	3.2	3.9	2.3	8.0	12.0	22.0
LY0003-2006	GCL2.5-4	4.3	3.9	2.3	8.0	12.0	23.0
LY0003-2007	GCL2.5-5	5.3	3.9	2.3	10.0	12.0	25.0
LY0003-2008	GCL2.5-6	6.5	3.9	2.3	10.0	12.0	25.0
LY0003-2009	GCL2.5-8	8.3	4.3	2.3	12.5	12.0	27.5
LY0003-2010	GCL4-4	4.3	4.7	3.0	10.0	13.0	26.0
LY0003-2011	GCL4-5	5.3	4.7	3.0	10.0	13.0	27.0
LY0003-2012	GCL4-6	6.5	4.7	3.0	10.0	13.0	28.0
LY0003-2013	GCL4-8	8.3	4.7	3.0	12.5	13.0	29.0
LY0003-2014	GCL6-4	4.3	5.9	4.0	10.0	18.5	33.6
LY0003-2015	GCL6-5	5.3	5.9	4.0	10.0	18.5	33.6
LY0003-2016	GCL6-6	6.5	5.9	4.0	11.0	18.5	33.6
LY0003-2017	GCL6-8	8.3	5.9	4.0	12.5	18.5	36.3
LY0003-2018	GCL6-10	10.3	6.2	4.0	15.0	18.5	37.3
LY0003-2019	GCL10-5	5.3	6.6	4.5	11.0	22.0	39.0
LY0003-2020	GCL10-6	6.5	6.6	4.5	11.0	22.0	39.0
LY0003-2021	GCL10-8	8.3	6.6	4.5	12.5	22.0	39.0
LY0003-2022	GCL10-10	10.3	6.9	4.5	16.0	22.0	43.1
LY0003-2023	GCL10-12	12.7	6.9	4.5	18.0	21.0	43.1
LY0003-2024	GCL16-5	5.3	7.5	5.5	11.0	23.0	39.7
LY0003-2025	GCL16-6	6.5	7.5	5.5	11.0	23.0	39.7
LY0003-2026	GCL16-8	8.3	7.5	5.5	12.5	22.0	39.7
LY0003-2027	GCL16-10	10.3	7.5	5.5	16.0	23.0	44.9
LY0003-2028	GCL16-12	12.7	8.1	5.5	18.0	22.0	44.9
LY0003-2029	GCL25-5	5.3	9.1	6.7	13.0	28.0	47.2
LY0003-2030	GCL25-6	6.5	9.1	6.7	13.0	28.0	47.2
LY0003-2031	GCL25-8	8.3	9.1	6.7	13.0	28.0	47.2
LY0003-2032	GCL25-10	10.3	9.1	6.7	16.0	29.0	51.9
LY0003-2033	GCL25-12	12.7	9.1	6.7	18.0	28.0	51.9
LY0003-2034	GCL25-14	14.8	9.1	6.7	20.0	28.0	53.9
LY0003-2035	GCL35-5	5.3	11.0	8.6	16.0	31.0	52.6
LY0003-2036	GCL35-6	6.5	11.0	8.6	16.0	31.0	52.6
LY0003-2037	GCL35-8	8.3	11.0	8.6	16.0	31.0	52.6
LY0003-2038	GCL35-10	10.3	11.0	8.6	17.0	31.0	56.5
LY0003-2039	GCL35-12	12.7	11.0	8.6	18.0	31.0	56.5
LY0003-2040	GCL35-14	14.8	11.0	8.6	20.0	31.0	58.5
LY0003-2041	GCL35-16	16.5	11.0	8.6	23.0	31.0	60.5
LY0003-2042	GCL50-5	5.3	12.4	9.5	18.0	32.0	56.0
LY0003-2043	GCL50-6	6.5	12.4	9.5	18.0	32.0	56.0
LY0003-2044	GCL50-8	8.3	12.4	9.5	18.0	32.0	56.0
LY0003-2045	GCL50-10	10.3	12.4	9.5	18.0	32.0	59.0

PART NO	ITEM NO	DIMENSIONS					
		ΦE	ΦD	Φd	W	B	L
LY0003-2046	GCL50-12	12.7	12.4	9.5	19.0	32.0	59.0
LY0003-2047	GCL50-14	14.8	12.4	9.5	21.0	34.0	67.8
LY0003-2048	GCL50-16	16.5	12.4	9.5	23.0	34.0	67.8
LY0003-2049	GCL70-5	5.3	15.0	12.0	22.0	36.5	67.4
LY0003-2050	GCL70-6	6.3	15.0	12.0	22.0	36.5	67.4
LY0003-2051	GCL70-8	8.3	15.0	12.0	22.0	36.5	67.4
LY0003-2052	GCL70-10	10.3	15.0	12.0	22.0	36.5	67.4
LY0003-2053	GCL70-12	12.7	15.0	12.0	22.0	36.5	67.4
LY0003-2054	GCL70-14	14.8	15.0	12.0	22.0	36.5	70.0
LY0003-2055	GCL70-16	16.5	15.0	12.0	24.0	35.0	70.0
LY0003-2056	GCL95-8	8.3	17.0	13.4	25.0	37.5	69.7
LY0003-2057	GCL95-10	10.3	17.0	13.4	25.0	37.5	69.7
LY0003-2058	GCL95-12	12.7	17.0	13.4	25.0	37.5	69.7
LY0003-2059	GCL95-14	14.8	17.0	13.4	25.0	37.5	73.3
LY0003-2060	GCL95-16	16.5	17.0	13.4	25.0	37.5	73.3
LY0003-2061	GCL95-20	20.9	17.0	13.4	28.0	34.5	73.3
LY0003-2062	GCL120-8	8.3	19.0	15.0	27.5	38.0	75.0
LY0003-2063	GCL120-10	10.3	19.0	15.0	27.5	38.0	75.0
LY0003-2064	GCL120-12	12.7	19.0	15.0	27.5	38.0	75.0
LY0003-2065	GCL120-14	14.8	19.0	15.0	27.5	38.0	79.0
LY0003-2066	GCL120-16	16.5	19.0	15.0	27.5	38.0	79.0
LY0003-2067	GCL120-20	20.9	19.0	15.0	27.5	38.0	79.0
LY0003-2068	GCL150-10	10.3	21.2	16.5	30.0	42.0	82.0
LY0003-2069	GCL150-12	12.7	21.2	16.5	30.0	42.0	82.0
LY0003-2070	GCL150-14	14.8	21.2	16.5	30.0	42.0	82.0
LY0003-2071	GCL150-16	16.5	21.2	16.5	30.0	42.0	86.4
LY0003-2072	GCL150-20	20.9	21.2	16.5	30.0	42.0	86.4
LY0003-2073	GCL185-10	10.3	23.0	19.0	34.0	45.0	88.0
LY0003-2074	GCL185-12	12.7	23.0	19.0	34.0	45.0	88.0
LY0003-2075	GCL185-14	14.8	23.0	19.0	34.0	45.0	88.0
LY0003-2076	GCL185-16	16.5	23.0	19.0	34.0	45.0	91.2
LY0003-2077	GCL185-20	20.9	23.0	19.0	34.0	45.0	91.2
LY0003-2078	GCL240-10	10.3	26.5	21.0	38.6	53.0	106.4
LY0003-2079	GCL240-12	12.7	26.5	21.0	38.6	53.0	106.4
LY0003-2080	GCL240-14	14.8	26.5	21.0	38.6	53.0	106.4
LY0003-2081	GCL240-16	16.5	26.5	21.0	38.6	53.0	106.4
LY0003-2082	GCL240-20	20.9	26.5	21.0	38.6	53.0	106.4
LY0003-2083	GCL300-12	12.7	30.0	24.5	43.8	57.0	113.0
LY0003-2084	GCL300-14	14.8	30.0	24.5	43.8	57.0	113.0
LY0003-2085	GCL300-16	16.5	30.0	24.5	43.8	57.0	113.0
LY0003-2086	GCL300-20	20.9	30.0	24.5	43.8	57.0	113.0
LY0003-2087	GCL400-12	12.7	35.0	27.0	50.0	59.0	119.0
LY0003-2088	GCL400-14	14.8	35.0	27.0	50.0	59.0	119.0
LY0003-2089	GCL400-16	16.5	35.0	27.0	50.0	59.0	119.0
LY0003-2090	GCL400-20	20.9	35.0	27.0	50.0	59.0	119.0

FC WITH BELL-MOUTH COPPER TUBE TERMINALS FC喇叭口銅管端子





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0003-3001	FC10-5	5.3	6.8	4.3	12.0	12.0	30.5
LY0003-3002	FC10-6	6.5	6.8	4.3	12.0	12.0	30.5
LY0003-3003	FC10-8	8.5	6.8	4.3	15.0	12.0	37.0
LY0003-3004	FC10-10	10.5	6.8	4.3	16.0	12.0	41.0
LY0003-3005	FC10-12	13.0	6.8	4.3	19.0	12.0	44.0
LY0003-3006	FC16-5	5.3	8.0	5.3	12.0	14.0	33.3
LY0003-3007	FC16-6	6.5	8.0	5.3	12.0	14.0	33.3
LY0003-3008	FC16-8	8.5	8.0	5.3	16.0	14.0	37.5
LY0003-3009	FC16-10	10.5	8.0	5.3	16.0	14.0	41.5
LY0003-3010	FC16-12	13.0	8.0	5.3	19.0	14.0	44.0
LY0003-3011	FC25-5	5.3	9.5	6.6	13.0	15.0	36.3
LY0003-3012	FC25-6	6.5	9.5	6.6	13.0	15.0	36.3
LY0003-3013	FC25-8	8.5	9.5	6.6	18.0	15.0	42.0
LY0003-3014	FC25-10	10.5	9.5	6.6	18.0	15.0	46.0
LY0003-3015	FC25-12	13.0	9.5	6.6	18.0	15.0	48.0
LY0003-3016	FC25-14	15.0	9.5	6.6	20.0	15.0	52.5
LY0003-3017	FC35-5	5.3	11.0	7.9	15.0	17.0	39.5
LY0003-3018	FC35-6	6.5	11.0	7.9	15.0	17.0	39.5
LY0003-3019	FC35-8	8.5	11.0	7.9	17.0	17.0	44.0
LY0003-3020	FC35-10	10.5	11.0	7.9	17.0	17.0	49.0
LY0003-3021	FC35-12	13.0	11.0	7.9	19.0	17.0	51.0
LY0003-3022	FC35-14	15.0	11.0	7.9	21.0	17.0	53.5
LY0003-3023	FC50-6	6.5	12.5	9.2	18.0	19.0	42.5
LY0003-3024	FC50-8	8.5	12.5	9.2	18.0	19.0	47.0
LY0003-3025	FC50-10	10.5	12.5	9.2	18.0	19.0	52.0
LY0003-3026	FC50-12	13.0	12.5	9.2	19.0	19.0	54.0
LY0003-3027	FC50-14	15.0	12.5	9.2	21.0	19.0	57.5
LY0003-3028	FC50-16	17.0	12.5	9.2	26.0	19.0	61.0
LY0003-3029	FC70-6	6.5	15.0	11.0	21.0	21.0	51.0
LY0003-3030	FC70-8	8.5	15.0	11.0	21.0	21.0	51.0
LY0003-3031	FC70-10	10.5	15.0	11.0	21.0	21.0	55.0
LY0003-3032	FC70-12	13.0	15.0	11.0	22.0	21.0	59.0
LY0003-3033	FC70-14	15.0	15.0	11.0	23.0	21.0	62.5
LY0003-3034	FC70-16	17.0	15.0	11.0	28.0	21.0	66.0

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0003-3035	FC70-20	21.0	15.0	11.0	30.0	21.0	72.0
LY0003-3036	FC95-8	8.5	17.0	13.1	25.0	25.0	56.0
LY0003-3037	FC95-10	10.5	17.0	13.1	25.0	25.0	60.0
LY0003-3038	FC95-12	13.0	17.0	13.1	25.0	25.0	62.0
LY0003-3039	FC95-14	15.0	17.0	13.1	25.0	25.0	66.5
LY0003-3040	FC95-16	17.0	17.0	13.1	25.0	25.0	70.0
LY0003-3041	FC95-20	21.0	17.0	13.1	30.0	25.0	76.0
LY0003-3042	FC120-8	8.5	19.0	14.5	28.0	26.0	64.0
LY0003-3043	FC120-10	10.5	19.0	14.5	28.0	26.0	64.0
LY0003-3044	FC120-12	13.0	19.0	14.5	28.0	26.0	66.0
LY0003-3045	FC120-14	15.0	19.0	14.5	28.0	26.0	69.5
LY0003-3046	FC120-16	17.0	19.0	14.5	28.0	26.0	72.0
LY0003-3047	FC150-10	10.5	21.0	16.2	30.0	30.0	71.0
LY0003-3048	FC150-12	13.0	21.0	16.2	30.0	30.0	73.0
LY0003-3049	FC150-14	15.0	21.0	16.2	30.0	30.0	73.0
LY0003-3050	FC150-16	17.0	21.0	16.2	30.0	30.0	75.0
LY0003-3051	FC185-12	13.0	23.0	18.0	33.5	32.0	81.0
LY0003-3052	FC185-14	15.0	23.0	18.0	33.5	32.0	85.0
LY0003-3053	FC185-16	17.0	23.0	18.0	33.5	32.0	87.0
LY0003-3054	FC185-20	21.0	23.0	18.0	33.5	32.0	91.0
LY0003-3055	FC240-10	10.5	26.0	20.6	38.0	35.0	93.5
LY0003-3056	FC240-12	13.0	26.0	20.6	38.0	35.0	93.5
LY0003-3057	FC240-14	15.0	26.0	20.6	38.0	35.0	93.5
LY0003-3058	FC240-16	17.0	26.0	20.6	38.0	35.0	93.5
LY0003-3059	FC240-20	21.0	26.0	20.6	38.0	35.0	93.5
LY0003-3060	FC300-12	13.0	28.0	23.0	41.0	44.0	96.0
LY0003-3061	FC300-14	15.0	28.0	23.0	41.0	44.0	102.0
LY0003-3062	FC300-16	17.0	28.0	23.0	41.0	44.0	102.0
LY0003-3063	FC300-20	21.0	28.0	23.0	41.0	44.0	106.0
LY0003-3064	FC400-12	13.0	32.0	26.0	46.5	44.0	115.0
LY0003-3065	FC400-14	15.0	32.0	26.0	46.5	44.0	115.0
LY0003-3066	FC400-16	17.0	32.0	26.0	46.5	44.0	115.0
LY0003-3067	FC400-20	21.0	32.0	26.0	46.5	44.0	118.0

HUP COPPER TUBE TERMINALS HUP銅管端子





◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0004-0001	HUP1.5-3	3.2	3.3	1.8	6.5	6.0	15.3
LY0004-0002	HUP1.5-4	4.3	3.3	1.8	6.5	6.0	17.0
LY0004-0003	HUP1.5-6	6.5	3.3	1.8	9.0	6.0	22.5
LY0004-0004	HUP2.5-3	3.2	4.2	2.3	7.5	6.0	15.3
LY0004-0005	HUP2.5-4	4.3	4.2	2.3	7.5	6.0	17.0
LY0004-0006	HUP2.5-5	5.3	4.2	2.3	8.5	6.0	18.8
LY0004-0007	HUP2.5-6	6.5	4.2	2.3	9.5	6.0	22.5
LY0004-0008	HUP2.5-8	8.5	4.2	2.3	13.0	6.0	27.8
LY0004-0009	HUP4-5	5.3	5.0	3.0	9.0	8.0	21.8
LY0004-0010	HUP4-6	6.5	5.0	3.0	10.0	8.0	25.5
LY0004-0011	HUP4-8	8.5	5.0	3.0	13.0	8.0	30.5
LY0004-0012	HUP6-5	5.3	6.5	3.5	10.0	9.0	27.5
LY0004-0013	HUP6-6	6.5	6.5	3.5	12.0	9.0	27.5
LY0004-0014	HUP6-8	8.5	6.5	3.5	15.0	9.0	33.0
LY0004-0015	HUP6-10	10.5	6.5	3.5	17.0	9.0	37.0
LY0004-0016	HUP6-12	13.0	6.5	3.5	19.0	9.0	41.0
LY0004-0017	HUP10-5	5.3	7.0	4.5	12.0	10.0	28.5
LY0004-0018	HUP10-6	6.5	7.0	4.5	12.0	10.0	28.5
LY0004-0019	HUP10-8	8.5	7.0	4.5	15.0	10.0	35.0
LY0004-0020	HUP10-10	10.5	7.0	4.5	17.0	10.0	39.0
LY0004-0021	HUP10-12	13.0	7.0	4.5	19.0	10.0	42.0
LY0004-0022	HUP16-5	5.3	8.5	5.5	12.0	13.0	32.5
LY0004-0023	HUP16-6	6.5	8.5	5.5	12.0	13.0	33.3
LY0004-0024	HUP16-8	8.5	8.5	5.5	15.0	13.0	37.5
LY0004-0025	HUP16-10	10.5	8.5	5.5	17.0	13.0	41.5
LY0004-0026	HUP16-12	13.0	8.5	5.5	19.0	13.0	45.0
LY0004-0027	HUP16-14	15.0	8.5	5.5	21.0	13.0	45.0
LY0004-0028	HUP25-5	5.3	10.0	7.0	14.0	15.0	37.5
LY0004-0029	HUP25-6	6.5	10.0	7.0	14.0	15.0	37.5
LY0004-0030	HUP25-8	8.5	10.0	7.0	16.0	15.0	42.0
LY0004-0031	HUP25-10	10.5	10.0	7.0	18.0	15.0	46.0
LY0004-0032	HUP25-12	13.0	10.0	7.0	19.0	15.0	48.0
LY0004-0033	HUP25-14	15.0	10.0	7.0	21.0	15.0	52.5
LY0004-0034	HUP35-6	6.5	12.0	8.5	17.0	17.0	39.5
LY0004-0035	HUP35-8	8.5	12.0	8.5	17.0	17.0	44.0
LY0004-0036	HUP35-10	10.5	12.0	8.5	19.0	17.0	49.0
LY0004-0037	HUP35-12	13.0	12.0	8.5	21.0	17.0	51.0
LY0004-0038	HUP35-14	15.0	12.0	8.5	21.0	17.0	54.5
LY0004-0039	HUP35-16	17.0	12.0	8.5	26.0	17.0	58.0
LY0004-0040	HUP50-6	6.5	14.0	10.0	20.0	19.0	47.0
LY0004-0041	HUP50-8	8.5	14.0	10.0	20.0	19.0	47.0
LY0004-0042	HUP50-10	10.5	14.0	10.0	20.0	19.0	51.0
LY0004-0043	HUP50-12	13.0	14.0	10.0	23.0	19.0	56.0
LY0004-0044	HUP50-14	15.0	14.0	10.0	23.0	19.0	59.5
LY0004-0045	HUP50-16	17.0	14.0	10.0	28.0	19.0	62.0
LY0004-0046	HUP50-20	21.0	14.0	10.0	30.0	19.0	67.0
LY0004-0047	HUP70-6	6.5	16.5	12.0	23.5	21.0	53.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0004-0048	HUP70-8	8.5	16.5	12.0	23.5	21.0	53.0
LY0004-0049	HUP70-10	10.5	16.5	12.0	23.5	21.0	56.0
LY0004-0050	HUP70-12	13.0	16.5	12.0	23.5	21.0	59.0
LY0004-0051	HUP70-14	15.0	16.5	12.0	23.5	21.0	62.5
LY0004-0052	HUP70-16	17.0	16.5	12.0	28.0	21.0	66.0
LY0004-0053	HUP70-20	21.0	16.5	12.0	30.0	21.0	72.0
LY0004-0054	HUP95-8	8.5	18.0	13.5	26.0	25.0	60.0
LY0004-0055	HUP95-10	10.5	18.0	13.5	26.0	25.0	60.0
LY0004-0056	HUP95-12	13.0	18.0	13.5	26.0	25.0	62.0
LY0004-0057	HUP95-14	15.0	18.0	13.5	26.0	25.0	65.5
LY0004-0058	HUP95-16	17.0	18.0	13.5	28.0	25.0	70.0
LY0004-0059	HUP95-20	21.0	18.0	13.5	36.0	26.0	82.0
LY0004-0060	HUP120-8	8.5	19.5	15.0	28.0	26.0	65.0
LY0004-0061	HUP120-10	10.5	19.5	15.0	28.0	26.0	65.0
LY0004-0062	HUP120-12	13.0	19.5	15.0	28.0	26.0	65.0
LY0004-0063	HUP120-14	15.0	19.5	15.0	28.0	26.0	67.0
LY0004-0064	HUP120-16	17.0	19.5	15.0	30.0	26.0	70.0
LY0004-0065	HUP120-20	21.0	19.5	15.0	36.0	28.0	85.0
LY0004-0066	HUP150-8	8.5	21.0	16.5	30.5	30.0	70.0
LY0004-0067	HUP150-10	10.5	21.0	16.5	30.5	30.0	72.0
LY0004-0068	HUP150-12	13.0	21.0	16.5	30.5	30.0	72.0
LY0004-0069	HUP150-14	15.0	21.0	16.5	30.5	30.0	72.0
LY0004-0070	HUP150-16	17.0	21.0	16.5	30.5	30.0	74.0
LY0004-0071	HUP150-20	21.0	21.0	16.5	36.0	30.0	88.0
LY0004-0072	HUP185-10	10.5	24.0	19.0	35.0	30.0	83.0
LY0004-0073	HUP185-12	13.0	24.0	19.0	35.0	30.0	83.0
LY0004-0074	HUP185-14	15.0	24.0	19.0	35.0	30.0	83.0
LY0004-0075	HUP185-16	17.0	24.0	19.0	35.0	30.0	83.0
LY0004-0076	HUP185-20	21.0	24.0	19.0	39.0	30.0	91.0
LY0004-0077	HUP240-10	10.5	26.0	21.0	38.0	35.0	93.5
LY0004-0078	HUP240-12	13.0	26.0	21.0	38.0	35.0	93.5
LY0004-0079	HUP240-14	15.0	26.0	21.0	38.0	35.0	93.5
LY0004-0080	HUP240-16	17.0	26.0	21.0	38.0	35.0	93.5
LY0004-0081	HUP240-20	21.0	26.0	21.0	38.0	35.0	93.5
LY0004-0082	HUP300-12	13.0	29.5	23.5	43.0	44.0	111.0
LY0004-0083	HUP300-14	15.0	29.5	23.5	43.0	44.0	111.0
LY0004-0084	HUP300-16	17.0	29.5	23.5	43.0	44.0	111.0
LY0004-0085	HUP300-20	21.0	29.5	23.5	43.0	44.0	111.0
LY0004-0086	HUP400-12	13.0	34.0	27.0	49.5	44.0	114.0
LY0004-0087	HUP400-14	15.0	34.0	27.0	49.5	44.0	114.0
LY0004-0088	HUP400-16	17.0	34.0	27.0	49.5	44.0	114.0
LY0004-0089	HUP400-20	21.0	34.0	27.0	49.5	44.0	114.0
LY0004-0090	HUP500-16	17.0	42.0	31.0	59.0	70.0	150.0
LY0004-0091	HUP500-20	21.0	42.0	31.0	59.0	70.0	150.0
LY0004-0092	HUP630-16	17.0	44.0	34.5	63.5	80.0	170.0
LY0004-0093	HUP630-20	21.0	44.0	34.5	63.5	80.0	170.0



CL-H COPPER TUBE TERMINALS CL-H銅管端子



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L
LY0005-0001	CL14-H-6	6.4	8.8	5.8	18.3	28.5	50.0
LY0005-0002	CL22-H-8	8.4	11.3	7.7	18.3	28.5	52.0
LY0005-0003	CL38-H-10	10.5	12.4	9.8	18.3	34.0	64.0
LY0005-0004	CL38-H-12	13.0	12.4	9.8	18.3	34.0	64.0
LY0005-0005	CL60-H-10	10.5	14.0	11.0	20.5	36.0	70.0
LY0005-0006	CL60-H-12	13.0	14.0	11.0	20.5	36.0	70.0
LY0005-0007	CL70-H-10	10.5	15.0	12.0	21.4	38.0	72.0
LY0005-0008	CL70-H-12	13.0	15.0	12.0	21.4	38.0	72.0
LY0005-0009	CL80-H-12	13.0	16.0	13.0	23.2	38.0	75.0
LY0005-0010	CL100-H-12	13.0	18.0	14.0	26.0	40.0	75.0
LY0005-0011	CL125-H-12	13.0	20.0	16.0	28.0	40.0	85.0
LY0005-0012	CL150-H-12	13.0	22.0	17.0	31.5	46.0	94.0
LY0005-0013	CL180-H-12	13.0	23.0	18.2	33.0	46.0	98.0
LY0005-0014	CL200-H-12	13.0	26.0	20.0	37.0	48.0	104.0
LY0005-0015	CL250-H-12	13.0	28.0	22.0	41.0	48.0	114.0
LY0005-0016	CL325-H-12	13.0	32.0	25.0	46.0	50.0	118.0
LY0005-0017	CL400-H-12	13.0	37.0	30.0	54.0	60.0	130.0
LY0005-0018	CL500-H-12	13.0	40.0	31.0	57.5	60.0	150.0
LY0005-0019	B-CL14-H-6	6.4	8.3	5.8	18.3	28.5	50.0
LY0005-0020	B-CL22-H-8	8.4	10.7	7.7	18.3	28.5	52.0
LY0005-0021	B-CL38-H-10	10.5	11.9	9.8	17.2	34.0	64.0
LY0005-0022	B-CL38-H-12	13.0	11.9	9.8	17.2	34.0	64.0
LY0005-0023	B-CL60-H-10	10.5	13.5	11.0	20.0	36.0	70.0
LY0005-0024	B-CL60-H-12	13.0	13.5	11.0	20.0	36.0	70.0
LY0005-0025	B-CL70-H-10	10.5	14.5	12.0	21.4	38.0	72.0
LY0005-0026	B-CL70-H-12	13.0	14.5	12.0	21.4	38.0	72.0
LY0005-0027	B-CL80-H-12	13.0	15.5	13.0	23.2	38.0	75.0
LY0005-0028	B-CL100-H-12	13.0	17.3	14.0	25.5	40.0	75.0
LY0005-0029	B-CL125-H-12	13.0	19.3	16.0	28.0	40.0	85.0
LY0005-0030	B-CL150-H-12	13.0	21.1	17.0	30.5	46.0	94.0
LY0005-0031	B-CL180-H-12	13.0	22.1	18.2	32.5	46.0	98.0
LY0005-0032	B-CL200-H-12	13.0	24.9	20.0	36.0	48.0	104.0
LY0005-0033	B-CL250-H-12	13.0	26.9	22.0	39.5	48.0	114.0
LY0005-0034	B-CL325-H-12	13.0	30.7	25.0	45.0	50.0	118.0
LY0005-0035	B-CL400-H-12	13.0	35.7	30.0	53.5	60.0	130.0
LY0005-0036	B-CL500-H-12	13.0	38.4	31.0	56.0	60.0	150.0



CL-2H COPPER TUBE TERMINALS CL-2H銅管端子



©Material
©Terminal Body: Copper
©Plating: Tin

PART NO	ITEM NO	DIMENSIONS						
		φ E	φ D	φ d	W	B	L	H
LY0005-1001	CL14-2H-6	6.4	8.8	5.8	13.0	28.5	117.5	45.0
LY0005-1002	CL22-2H-8	8.4	11.3	7.7	16.0	28.5	119.2	45.0
LY0005-1003	CL38-2H-10	10.5	12.4	9.8	18.3	31.7	120.0	45.0
LY0005-1004	CL38-2H-12	13.0	12.4	9.8	18.3	31.7	120.0	45.0
LY0005-1005	CL60-2H-10	10.5	14.0	11.0	20.5	40.0	130.0	45.0
LY0005-1006	CL60-2H-12	13.0	14.0	11.0	20.5	40.0	130.0	45.0
LY0005-1007	CL70-2H-10	10.5	15.0	12.0	21.4	40.0	130.0	45.0
LY0005-1008	CL70-2H-12	13.0	15.0	12.0	21.4	40.0	130.0	45.0
LY0005-1009	CL80-2H-12	13.0	16.0	13.0	23.2	40.0	130.0	45.0
LY0005-1010	CL100-2H-12	13.0	18.0	14.0	26.0	42.0	132.0	45.0
LY0005-1011	CL125-2H-12	13.0	20.0	16.0	29.0	42.0	135.0	45.0
LY0005-1012	CL150-2H-12	13.0	22.0	17.0	31.5	50.0	150.0	45.0
LY0005-1013	CL180-2H-12	13.0	23.0	18.2	33.0	50.0	150.0	45.0
LY0005-1014	CL200-2H-12	13.0	26.0	20.0	37.0	52.5	150.0	45.0
LY0005-1015	CL250-2H-12	13.0	28.0	22.0	40.0	50.0	150.0	45.0
LY0005-1016	CL325-2H-12	13.0	32.0	25.0	46.0	68.0	180.0	45.0
LY0005-1017	CL400-2H-12	13.0	37.0	30.0	54.0	60.0	180.0	45.0
LY0005-1018	CL500-2H-12	13.0	40.0	31.0	57.5	60.0	180.0	45.0
LY0005-1019	B-CL14-2H-6	6.4	8.3	5.8	13.0	28.5	117.5	45.0
LY0005-1020	B-CL22-2H-8	8.4	10.7	7.7	16.0	28.5	119.2	45.0
LY0005-1021	B-CL38-2H-10	10.5	11.9	9.8	17.5	31.7	120.0	45.0
LY0005-1022	B-CL38-2H-12	13.0	11.9	9.8	17.5	31.7	120.0	45.0
LY0005-1023	B-CL60-2H-10	10.5	13.5	11.0	19.5	40.0	130.0	45.0
LY0005-1024	B-CL60-2H-12	13.0	13.5	11.0	19.5	40.0	130.0	45.0
LY0005-1025	B-CL70-2H-10	10.5	14.5	12.0	21.4	40.0	130.0	45.0
LY0005-1026	B-CL70-2H-12	13.0	14.5	12.0	21.4	40.0	130.0	45.0
LY0005-1027	B-CL80-2H-12	13.0	15.5	13.0	23.2	40.0	130.0	45.0
LY0005-1028	B-CL100-2H-12	13.0	17.3	14.0	26.0	42.0	132.0	45.0
LY0005-1029	B-CL125-2H-12	13.0	19.3	16.0	28.0	42.0	135.0	45.0
LY0005-1030	B-CL150-2H-12	13.0	21.1	17.0	31.0	50.0	150.0	45.0
LY0005-1031	B-CL180-2H-12	13.0	22.1	18.2	33.0	50.0	150.0	45.0
LY0005-1032	B-CL200-2H-12	13.0	24.9	20.0	36.0	50.0	150.0	45.0
LY0005-1033	B-CL250-2H-12	13.0	26.9	22.0	39.0	50.0	150.0	45.0
LY0005-1034	B-CL325-2H-12	13.0	30.7	25.0	45.0	68.0	180.0	45.0
LY0005-1035	B-CL400-2H-12	13.0	35.7	30.0	54.0	60.0	180.0	45.0
LY0005-1036	B-CL500-2H-12	13.0	38.4	31.0	56.0	60.0	180.0	45.0

JM COPPER TUBE TERMINALS JM銅管端子





- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0006-0001	JM2.5-4	4.20	3.90	2.60	8.7	7.0	20.00
LY0006-0002	JM2.5-6	6.50	3.90	2.60	10.0	7.0	20.00
LY0006-0003	JM4-4	4.20	4.40	3.20	10.0	8.0	22.00
LY0006-0004	JM4-5	5.20	4.40	3.20	10.0	8.0	22.00
LY0006-0005	JM4-6	6.50	4.40	3.20	10.0	8.0	22.00
LY0006-0006	JM6-5	5.20	5.20	3.70	10.0	10.0	24.00
LY0006-0007	JM6-6	6.50	5.20	3.70	12.0	10.0	24.00
LY0006-0008	JM6-8	8.40	5.20	3.70	12.5	10.0	24.00
LY0006-0009	JM10-5	5.20	6.20	4.50	12.0	10.0	27.00
LY0006-0010	JM10-6	6.50	6.20	4.50	12.0	10.0	27.00
LY0006-0011	JM10-8	8.40	6.20	4.50	12.5	10.0	27.00
LY0006-0012	JM10-10	10.30	6.20	4.50	15.0	10.0	29.00
LY0006-0013	JM16-6	6.50	7.34	5.70	12.0	12.0	30.00
LY0006-0014	JM16-8	8.40	7.34	5.70	12.5	12.0	30.00
LY0006-0015	JM16-10	10.50	7.34	5.70	16.0	12.0	32.00
LY0006-0016	JM16-12	13.00	7.34	5.70	17.0	12.0	32.00
LY0006-0017	JM25-6	6.50	8.84	7.20	13.0	15.0	34.00
LY0006-0018	JM25-8	8.40	8.84	7.20	15.0	15.0	34.00
LY0006-0019	JM25-10	10.50	8.84	7.20	16.0	15.0	34.00
LY0006-0020	JM25-12	13.00	8.84	7.20	18.0	15.0	36.00
LY0006-0021	JM35-6	6.50	10.60	8.50	16.0	16.0	38.00
LY0006-0022	JM35-8	8.40	10.60	8.50	16.0	16.0	38.00
LY0006-0023	JM35-10	10.50	10.60	8.50	16.0	16.0	38.00
LY0006-0024	JM35-12	13.00	10.60	8.50	18.0	15.0	38.00
LY0006-0025	JM50-6	6.50	12.25	9.80	18.0	19.0	44.00
LY0006-0026	JM50-8	8.40	12.25	9.80	18.0	19.0	44.00
LY0006-0027	JM50-10	10.50	12.25	9.80	18.0	19.0	44.00
LY0006-0028	JM50-12	13.00	12.25	9.80	20.0	19.0	44.00
LY0006-0029	JM70-8	8.40	14.20	11.50	21.0	22.0	50.00
LY0006-0030	JM70-10	10.50	14.20	11.50	21.0	22.0	50.00
LY0006-0031	JM70-12	13.00	14.20	11.50	21.0	22.0	50.00
LY0006-0032	JM70-14	14.50	14.20	11.50	21.0	22.0	50.00

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0006-0033	JM95-10	10.50	16.70	13.70	25.0	25.0	57.00
LY0006-0034	JM95-12	13.00	16.70	13.70	25.0	25.0	57.00
LY0006-0035	JM95-14	14.50	16.70	13.70	25.0	25.0	57.00
LY0006-0036	JM120-10	10.50	18.60	15.00	27.0	26.0	63.50
LY0006-0037	JM120-12	13.00	18.60	15.00	27.0	26.0	63.50
LY0006-0038	JM120-14	14.70	18.60	15.00	27.0	26.0	63.50
LY0006-0039	JM120-16	17.00	18.60	15.00	27.0	26.0	63.50
LY0006-0040	JM150-10	10.50	20.60	16.70	30.0	30.0	71.00
LY0006-0041	JM150-12	13.00	20.60	16.70	30.0	30.0	71.00
LY0006-0042	JM150-14	14.70	20.60	16.70	30.0	30.0	71.00
LY0006-0043	JM150-16	17.00	20.60	16.70	30.0	30.0	71.00
LY0006-0044	JM185-12	13.00	22.60	18.50	34.0	32.0	79.00
LY0006-0045	JM185-14	14.70	22.60	18.50	34.0	32.0	79.00
LY0006-0046	JM185-16	17.00	22.60	18.50	34.0	32.0	79.00
LY0006-0047	JM240-12	13.00	25.55	21.00	38.0	40.0	92.00
LY0006-0048	JM240-14	14.70	25.55	21.00	38.0	40.0	92.00
LY0006-0049	JM240-16	17.00	25.55	21.00	38.0	40.0	92.00
LY0006-0050	JM240-20	21.00	25.55	21.00	38.0	40.0	92.00
LY0006-0051	JM300-12	13.00	29.45	24.00	43.0	44.0	102.00
LY0006-0052	JM300-14	14.70	29.45	24.00	43.0	44.0	102.00
LY0006-0053	JM300-16	17.00	29.45	24.00	43.0	44.0	102.00
LY0006-0054	JM300-20	21.00	29.45	24.00	43.0	44.0	102.00
LY0006-0055	JM400-12	13.00	33.35	27.00	48.5	50.0	113.00
LY0006-0056	JM400-14	14.70	33.35	27.00	48.5	50.0	113.00
LY0006-0057	JM400-16	17.00	33.35	27.00	48.5	50.0	113.00
LY0006-0058	JM400-20	21.00	33.35	27.00	48.5	50.0	113.00
LY0006-0059	JM500-14	14.70	37.30	30.00	55.0	50.0	123.00
LY0006-0060	JM500-16	17.00	37.30	30.00	55.0	50.0	123.00
LY0006-0061	JM500-20	21.00	37.30	30.00	55.0	50.0	123.00
LY0006-0062	JM630-16	17.00	44.10	35.00	65.0	65.0	135.00
LY0006-0063	JM630-18	19.00	44.10	35.00	65.0	65.0	135.00
LY0006-0064	JM630-20	21.00	44.10	35.00	65.0	65.0	135.00



DT COPPER TUBE TERMINALS DT銅管端子



©Material
©Terminal Body: Copper
©Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0007-0001	DT1.5-5	5.2	4.0	2.2	8.0	10.0	23.0
LY0007-0002	DT2.5-4	4.2	4.5	2.9	8.0	13.0	27.0
LY0007-0003	DT2.5-5	5.2	4.5	2.9	8.0	13.0	27.0
LY0007-0004	DT2.5-6	6.4	4.5	2.9	10.0	13.0	27.0
LY0007-0005	DT4-5	5.2	5.2	3.6	10.0	13.0	28.0
LY0007-0006	DT4-6	6.4	5.2	3.6	10.0	13.0	28.0
LY0007-0007	DT6-5	5.2	6.0	4.2	10.0	17.0	35.0
LY0007-0008	DT6-6	6.4	6.0	4.2	10.0	17.0	35.0
LY0007-0009	DT6-8	8.4	6.0	4.2	12.0	17.0	35.0
LY0007-0010	DT10-6	6.4	7.0	5.0	12.4	17.0	36.0
LY0007-0011	DT10-8	8.4	7.0	5.0	12.4	17.0	36.0
LY0007-0012	DT16-6	6.4	9.0	6.0	14.0	32.0	58.0
LY0007-0013	DT16-8	8.4	9.0	6.0	14.0	32.0	58.0
LY0007-0014	DT25-6	6.4	10.0	7.0	15.0	32.0	58.0
LY0007-0015	DT25-8	8.4	10.0	7.0	15.0	32.0	58.0
LY0007-0016	DT25-10	10.5	10.0	7.0	17.5	32.0	58.0
LY0007-0017	DT35-6	6.4	12.0	9.0	17.1	36.0	62.0
LY0007-0018	DT35-8	8.4	12.0	9.0	17.1	36.0	62.0
LY0007-0019	DT35-10	10.5	12.0	9.0	18.0	36.0	62.0
LY0007-0020	DT50-8	8.4	14.0	10.0	20.0	40.0	72.0
LY0007-0021	DT50-10	10.5	14.0	10.0	20.0	40.0	72.0
LY0007-0022	DT70-8	8.4	16.0	12.0	23.0	42.0	76.0
LY0007-0023	DT70-10	10.5	16.0	12.0	23.0	42.0	76.0
LY0007-0024	DT70-12	13.0	16.0	12.0	23.0	42.0	76.0
LY0007-0025	DT95-10	10.5	18.0	14.0	26.0	44.0	84.0
LY0007-0026	DT95-12	13.0	18.0	14.0	26.0	44.0	84.0
LY0007-0027	DT120-12	13.0	21.0	16.0	30.0	46.0	90.0
LY0007-0028	DT120-16	17.0	21.0	16.0	30.0	46.0	90.0
LY0007-0029	DT150-12	13.0	23.0	17.0	33.0	50.0	98.0
LY0007-0030	DT150-16	17.0	23.0	17.0	33.0	50.0	98.0
LY0007-0031	DT185-12	13.0	25.0	19.0	36.0	52.0	101.0
LY0007-0032	DT185-16	17.0	25.0	19.0	36.0	52.0	101.0
LY0007-0033	DT240-12	13.0	28.0	21.6	40.0	52.0	110.0
LY0007-0034	DT240-16	17.0	28.0	21.6	40.0	52.0	112.0
LY0007-0035	DT240-20	21.0	28.0	21.6	40.0	52.0	112.0
LY0007-0036	DT300-16	17.0	31.0	24.0	45.0	58.0	116.0
LY0007-0037	DT300-20	21.0	31.0	24.0	45.0	58.0	120.0
LY0007-0038	DT400-16	17.0	36.5	28.5	52.0	66.0	126.0
LY0007-0039	DT400-20	21.0	36.5	28.5	52.0	66.0	131.0
LY0007-0040	DT500-16	17.0	39.0	30.5	56.0	70.0	141.0
LY0007-0041	DT500-20	21.0	39.0	30.5	56.0	70.0	146.0
LY0007-0042	DT630-20	21.0	45.0	35.5	65.0	80.0	168.0


DT COPPER TUBE TERMINALS DT铜管端子



◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0007-1001	DT16	7.0	9.0	6.0	13.0	15.0	40.0
LY0007-1002	DT25	7.0	10.0	7.0	15.0	20.0	45.0
LY0007-1003	DT35	7.0	11.0	8.0	16.0	23.0	50.0
LY0007-1004	DT50	9.0	13.0	10.0	18.7	23.0	55.0
LY0007-1005	DT70	9.0	15.0	11.0	21.5	26.0	60.0
LY0007-1006	DT95	11.0	18.0	13.0	25.0	28.0	65.0
LY0007-1007	DT120	13.0	20.0	15.0	28.8	33.0	75.0
LY0007-1008	DT150	13.0	22.0	16.0	31.5	40.0	85.0
LY0007-1009	DT185	17.0	25.0	19.0	36.0	47.0	95.0
LY0007-1010	DT240	17.0	27.0	21.0	40.0	50.0	105.0
LY0007-1011	DT300	21.0	30.0	23.0	43.5	55.0	115.0
LY0007-1012	DT400	21.0	34.0	26.0	49.0	60.0	130.0



C45N COPPER TUBE TERMINALS C45N 铜管端子



◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS			
		φ D	φ d	W	L
LY0008-0001	C45N 4	5.0	3.0	6.6	24.0
LY0008-0002	C45N 6	5.9	3.9	7.0	28.0
LY0008-0003	C45N 10	6.9	4.9	7.0	28.0
LY0008-0004	C45N 16	8.1	5.9	7.0	31.0
LY0008-0005	C45N 25	10.0	7.3	7.0	33.0
LY0008-0006	C45N 35	11.2	8.4	7.0	39.0
LY0008-0007	C45N 50	12.5	9.5	7.0	45.0
LY0008-0008	C45N 70	14.7	11.2	7.0	50.0


TPE COPPER TUBE TERMINALS TPE 铜管端子



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0009-0001	TPE-50/8	8.5	12.6	9.8	15.0	32.0	50.0
LY0009-0002	TPE-50/10	10.5	12.6	9.8	15.0	32.0	50.0
LY0009-0003	TPE-70/8	8.5	14.7	11.5	15.0	35.0	55.0
LY0009-0004	TPE-70/10	10.5	14.7	11.5	15.0	35.0	55.0
LY0009-0005	TPE-95/8	8.5	16.9	13.5	15.0	39.0	60.0
LY0009-0006	TPE-95/10	10.5	16.9	13.5	15.0	39.0	60.0
LY0009-0007	TPE-120/8	8.5	19.9	15.6	21.0	44.0	65.0
LY0009-0008	TPE-120/10	10.5	19.9	15.6	21.0	44.0	65.0
LY0009-0009	TPE-150/10	10.5	20.9	16.5	21.0	47.0	72.0
LY0009-0010	TPE-150/12	12.5	20.9	16.5	21.0	47.0	72.0
LY0009-0011	TPE-185/10	10.5	23.7	18.8	26.0	50.0	75.0
LY0009-0012	TPE-185/12	12.5	23.7	18.8	26.0	50.0	75.0
LY0009-0013	TPE-240/10	10.5	26.2	21.2	26.0	60.0	85.0
LY0009-0014	TPE-240/12	12.5	26.2	21.2	26.0	60.0	85.0



CP FLAT COPPER TUBE TERMINALS CP 扁型铜管端子



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS				
		φ D	φ d	W	L	L1
LY0009-1001	CP-10	6.8	4.7	5.0	25.0	12.0
LY0009-1002	CP-16	7.8	5.6	6.0	31.0	15.0
LY0009-1003	CP-25	9.4	7.1	7.0	34.0	18.0
LY0009-1004	CP-35	11.3	8.7	9.0	42.0	18.0
LY0009-1005	CP-50	12.6	9.8	10.0	46.0	21.0

LYF COPPER TUBE TERMINALS LYF 銅管端子




◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0010-0001	LYF10-5	5.3	8.0	5.0	11.5	9.0	28.0
LY0010-0002	LYF10-6	6.5	8.0	5.0	11.5	9.0	28.0
LY0010-0003	LYF10-8	8.4	8.0	5.0	13.5	9.0	32.0
LY0010-0004	LYF10-10	10.5	8.0	5.0	16.0	9.0	34.0
LY0010-0005	LYF16-6	6.5	9.0	6.0	13.0	10.0	33.0
LY0010-0006	LYF16-8	8.4	9.0	6.0	13.0	10.0	33.0
LY0010-0007	LYF16-10	10.5	9.0	6.0	16.0	10.0	38.0
LY0010-0008	LYF16-12	13.0	9.0	6.0	22.0	10.0	47.0
LY0010-0009	LYF25-6	6.5	11.0	8.0	16.0	11.0	37.0
LY0010-0010	LYF25-8	8.4	11.0	8.0	16.0	11.0	38.0
LY0010-0011	LYF25-10	10.5	11.0	8.0	17.0	11.0	42.0
LY0010-0012	LYF25-12	13.0	11.0	8.0	22.0	11.0	47.0
LY0010-0013	LYF35-6	6.5	13.0	9.0	18.0	14.0	44.0
LY0010-0014	LYF35-8	8.4	13.0	9.0	18.0	14.0	44.0
LY0010-0015	LYF35-10	10.5	13.0	9.0	18.0	14.0	44.0
LY0010-0016	LYF35-12	13.0	13.0	9.0	22.0	14.0	52.0
LY0010-0017	LYF50-6	6.5	14.5	11.0	21.0	17.0	50.0
LY0010-0018	LYF50-8	8.4	14.5	11.0	21.0	17.0	50.0
LY0010-0019	LYF50-10	10.5	14.5	11.0	21.0	17.0	50.0
LY0010-0020	LYF50-12	13.0	14.5	11.0	21.0	17.0	53.0
LY0010-0021	LYF70-6	6.5	17.0	13.0	25.0	20.0	55.0
LY0010-0022	LYF70-8	8.4	17.0	13.0	25.0	20.0	55.0
LY0010-0023	LYF70-10	10.5	17.0	13.0	25.0	20.0	55.0
LY0010-0024	LYF70-12	13.0	17.0	13.0	25.0	20.0	58.0
LY0010-0025	LYF70-16	17.0	17.0	13.0	28.0	20.0	64.0
LY0010-0026	LYF95-8	8.4	20.0	15.0	29.0	23.0	69.0
LY0010-0027	LYF95-10	10.5	20.0	15.0	29.0	23.0	69.0
LY0010-0028	LYF95-12	13.0	20.0	15.0	29.0	23.0	69.0
LY0010-0029	LYF95-16	17.0	20.0	15.0	29.0	23.0	69.0
LY0010-0030	LYF120-10	10.5	22.0	17.0	32.0	25.0	73.0

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0010-0031	LYF120-12	13.0	22.0	17.0	32.0	25.0	73.0
LY0010-0032	LYF120-16	17.0	22.0	17.0	32.0	25.0	73.0
LY0010-0033	LYF150-10	10.5	25.0	19.0	36.0	30.0	80.0
LY0010-0034	LYF150-12	13.0	25.0	19.0	36.0	30.0	80.0
LY0010-0035	LYF150-16	17.0	25.0	19.0	36.0	30.0	80.0
LY0010-0036	LYF150-20	21.0	25.0	19.0	36.0	30.0	87.0
LY0010-0037	LYF185-10	10.5	27.0	21.0	39.0	35.0	86.0
LY0010-0038	LYF185-12	13.0	27.0	21.0	39.0	35.0	86.0
LY0010-0039	LYF185-16	17.0	27.0	21.0	39.0	35.0	86.0
LY0010-0040	LYF185-20	21.0	27.0	21.0	39.0	35.0	93.0
LY0010-0041	LYF240-10	10.5	30.0	24.0	44.0	35.0	95.0
LY0010-0042	LYF240-12	13.0	30.0	24.0	44.0	35.0	95.0
LY0010-0043	LYF240-16	17.0	30.0	24.0	44.0	35.0	95.0
LY0010-0044	LYF240-20	21.0	30.0	24.0	44.0	35.0	95.0
LY0010-0045	LYF300-10	10.5	32.0	26.0	47.0	42.0	114.0
LY0010-0046	LYF300-12	13.0	32.0	26.0	47.0	42.0	114.0
LY0010-0047	LYF300-16	17.0	32.0	26.0	47.0	42.0	114.0
LY0010-0048	LYF300-20	21.0	32.0	26.0	47.0	42.0	114.0
LY0010-0049	LYF300-24	26.0	32.0	26.0	47.0	42.0	114.0
LY0010-0050	LYF400-12	13.0	36.0	30.0	54.0	48.0	126.0
LY0010-0051	LYF400-16	17.0	36.0	30.0	54.0	48.0	126.0
LY0010-0052	LYF400-20	21.0	36.0	30.0	54.0	48.0	126.0
LY0010-0053	LYF400-24	26.0	36.0	30.0	54.0	48.0	126.0
LY0010-0054	LYF500-20	21.0	42.0	33.0	61.0	47.0	134.0
LY0010-0055	LYF500-24	26.0	42.0	33.0	61.0	47.0	134.0
LY0010-0056	LYF630-BL		53.0	39.0	75.0	68.0	180.0
LY0010-0057	LYF630-20	21.0	53.0	39.0	75.0	68.0	180.0
LY0010-0058	LYF630-24	26.0	53.0	39.0	75.0	68.0	180.0


LYF 45° COPPER TUBE TERMINALS LYF 45° 銅管端子



◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L1
LY0010-1001	LYF45-10/6	6.5	8.0	5.0	13.0	19.0	18.0
LY0010-1002	LYF45-10/8	8.4	8.0	5.0	13.5	19.0	20.5
LY0010-1003	LYF45-16/6	6.5	9.0	6.0	13.0	23.0	18.0
LY0010-1004	LYF45-16/8	8.4	9.0	6.0	13.5	23.0	20.5
LY0010-1005	LYF45-25/6	6.5	11.0	8.0	17.0	24.0	18.0
LY0010-1006	LYF45-25/8	8.4	11.0	8.0	17.0	24.0	20.5
LY0010-1007	LYF45-25/10	10.5	11.0	8.0	17.0	24.0	25.0
LY0010-1008	LYF45-35/6	6.5	13.0	9.0	18.0	30.0	18.0
LY0010-1009	LYF45-35/8	8.4	13.0	9.0	18.0	30.0	20.5
LY0010-1010	LYF45-35/10	10.5	13.0	9.0	18.0	30.0	25.0
LY0010-1011	LYF45-50/8	8.4	14.5	11.0	21.0	31.0	26.0
LY0010-1012	LYF45-50/10	10.5	14.5	11.0	21.0	31.0	30.0
LY0010-1013	LYF45-50/12	13.0	14.5	11.0	21.0	31.0	32.0
LY0010-1014	LYF45-70/8	8.4	17.0	13.0	25.0	35.0	26.0
LY0010-1015	LYF45-70/10	10.5	17.0	13.0	25.0	35.0	30.0
LY0010-1016	LYF45-70/12	13.0	17.0	13.0	25.0	35.0	32.0
LY0010-1017	LYF45-95/10	10.5	20.0	15.0	29.0	40.0	30.0
LY0010-1018	LYF45-95/12	13.0	20.0	15.0	29.0	40.0	32.0
LY0010-1019	LYF45-95/16	17.0	20.0	15.0	29.0	40.0	36.0
LY0010-1020	LYF45-120/10	10.5	22.0	17.0	32.0	43.0	30.0
LY0010-1021	LYF45-120/12	13.0	22.0	17.0	32.0	43.0	32.0
LY0010-1022	LYF45-120/16	17.0	22.0	17.0	32.0	43.0	36.0



LYF 90° COPPER TUBE TERMINALS LYF 90° 銅管端子

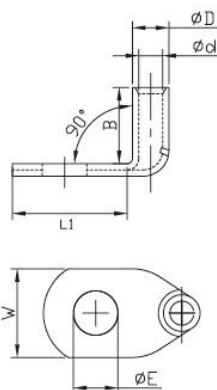

◎ Material
◎ Terminal Body: Copper
◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	L1
LY0010-2001	LYF90-10/6	6.5	8.0	5.0	13.0	15.0	18.0
LY0010-2002	LYF90-10/8	8.4	8.0	5.0	13.5	15.0	20.5
LY0010-2003	LYF90-16/6	6.5	9.0	6.0	13.0	17.0	18.0
LY0010-2004	LYF90-16/8	8.4	9.0	6.0	13.5	17.0	20.5
LY0010-2005	LYF90-25/6	6.5	11.0	8.0	17.0	18.5	18.0
LY0010-2006	LYF90-25/8	8.4	11.0	8.0	17.0	18.5	20.5
LY0010-2007	LYF90-25/10	10.5	11.0	8.0	17.0	18.5	25.0
LY0010-2008	LYF90-35/6	6.5	13.0	9.0	18.0	22.5	18.0
LY0010-2009	LYF90-35/8	8.4	12.0	8.5	17.0	22.5	20.5
LY0010-2010	LYF90-35/10	10.5	13.0	9.0	18.0	22.5	25.0
LY0010-2011	LYF90-50/6	6.5	14.5	11.0	21.0	30.5	26.0
LY0010-2012	LYF90-50/8	8.4	14.5	11.0	21.0	30.5	26.0
LY0010-2013	LYF90-50/10	10.5	14.5	11.0	21.0	30.5	30.0
LY0010-2014	LYF90-50/12	13.0	14.5	11.0	21.0	30.5	32.0
LY0010-2015	LYF90-70/6	6.5	16.5	12.0	24.0	31.5	26.0
LY0010-2016	LYF90-70/8	8.4	16.5	12.0	24.0	31.5	26.0
LY0010-2017	LYF90-70/10	10.5	16.5	12.0	24.0	31.5	30.0
LY0010-2018	LYF90-70/12	13.0	16.5	12.0	24.0	31.5	32.0
LY0010-2019	LYF90-95/8	8.4	20.0	15.0	29.0	32.5	26.0
LY0010-2020	LYF90-95/10	10.5	20.0	15.0	29.0	32.5	30.0
LY0010-2021	LYF90-95/12	13.0	20.0	15.0	29.0	32.5	32.0
LY0010-2022	LYF90-95/16	17.0	20.0	15.0	29.0	32.5	36.0
LY0010-2023	LYF90-120/10	10.5	22.0	17.0	32.0	34.5	30.0
LY0010-2024	LYF90-120/12	13.0	22.0	17.0	32.0	34.5	32.0
LY0010-2025	LYF90-120/16	17.0	22.0	17.0	32.0	34.5	36.0

GPH COPPER TUBE TERMINALS GPH銅管端子





- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0011-0001	GPH1.5-3	3.2	3.3	1.8	6.5	6.0	15.5
LY0011-0002	GPH1.5-4	4.3	3.3	1.8	6.5	6.0	17.5
LY0011-0003	GPH1.5-5	5.3	3.3	1.8	9.0	6.0	19.0
LY0011-0004	GPH1.5-6	6.4	3.3	1.8	9.0	6.0	22.5
LY0011-0005	GPH2.5-4	4.3	4.2	2.2	7.5	6.0	17.1
LY0011-0006	GPH2.5-5	5.3	4.2	2.2	8.5	6.0	19.2
LY0011-0007	GPH2.5-6	6.4	4.2	2.2	9.5	6.0	22.8
LY0011-0008	GPH2.5-8	8.4	4.2	2.2	13.0	6.0	28.0
LY0011-0009	GPH4-4	4.3	5.0	3.0	8.5	8.0	21.8
LY0011-0010	GPH4-5	5.3	5.0	3.0	9.0	8.0	22.2
LY0011-0011	GPH4-6	6.4	5.0	3.0	10.0	8.0	22.2
LY0011-0012	GPH6-5	5.3	6.5	3.5	10.0	11.0	28.2
LY0011-0013	GPH6-6	6.4	6.5	3.5	12.0	11.0	29.1
LY0011-0014	GPH6-8	8.4	6.5	3.5	15.0	11.0	31.8
LY0011-0015	GPH6-10	10.5	6.5	3.5	17.0	11.0	37.0
LY0011-0016	GPH10-5	5.3	7.0	4.5	12.0	11.0	28.1
LY0011-0017	GPH10-6	6.4	7.0	4.5	12.0	11.0	29.0
LY0011-0018	GPH10-8	8.4	7.0	4.5	14.5	10.0	33.3
LY0011-0019	GPH10-10	10.5	7.0	4.5	16.0	11.0	36.9
LY0011-0020	GPH16-5	5.3	8.5	5.5	12.0	14.0	33.1
LY0011-0021	GPH16-6	6.4	8.5	5.5	12.5	14.0	33.5
LY0011-0022	GPH16-8	8.4	8.5	5.5	13.8	14.0	38.0
LY0011-0023	GPH16-10	10.5	8.5	5.5	17.0	14.0	42.0
LY0011-0024	GPH16-12	13.2	8.5	5.5	20.0	14.0	44.5
LY0011-0025	GPH25-6	6.4	10.0	7.0	14.0	15.0	34.6
LY0011-0026	GPH25-8	8.4	10.0	7.0	16.0	15.0	39.0
LY0011-0027	GPH25-10	10.5	10.0	7.0	18.0	15.0	44.5
LY0011-0028	GPH25-12	13.2	10.0	7.0	20.0	15.0	47.0
LY0011-0029	GPH35-6	6.4	12.0	8.5	16.7	16.0	38.0

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0011-0030	GPH35-8	8.4	12.0	8.5	17.5	17.0	43.0
LY0011-0031	GPH35-10	10.5	12.0	8.5	18.5	16.0	46.0
LY0011-0032	GPH35-12	13.2	12.0	8.5	21.3	16.0	50.0
LY0011-0033	GPH50-8	8.4	14.0	10.0	21.0	19.0	47.0
LY0011-0034	GPH50-10	10.5	14.0	10.0	21.0	19.0	51.2
LY0011-0035	GPH50-12	13.2	14.0	10.0	21.5	19.0	52.0
LY0011-0036	GPH70-8	8.4	16.5	12.0	23.2	21.0	52.0
LY0011-0037	GPH70-10	10.5	16.5	12.0	23.2	21.0	52.0
LY0011-0038	GPH70-12	13.2	16.5	12.0	23.2	21.0	55.7
LY0011-0039	GPH95-8	8.4	18.0	13.5	25.6	25.0	59.0
LY0011-0040	GPH95-10	10.5	18.0	13.5	25.6	25.0	59.0
LY0011-0041	GPH95-12	13.2	18.0	13.5	25.6	25.0	61.0
LY0011-0042	GPH120-10	10.5	19.5	15.0	28.2	27.0	68.0
LY0011-0043	GPH120-12	13.2	19.5	15.0	28.2	27.0	68.0
LY0011-0044	GPH120-16	17.0	19.5	15.0	30.0	27.0	74.0
LY0011-0045	GPH150-10	10.5	21.2	16.5	30.6	30.0	71.0
LY0011-0046	GPH150-12	13.2	21.2	16.5	30.6	30.0	71.0
LY0011-0047	GPH150-16	17.0	21.2	16.5	30.6	30.0	77.0
LY0011-0048	GPH185-10	10.5	24.2	19.0	35.1	32.0	79.0
LY0011-0049	GPH185-12	13.2	24.2	19.0	35.1	32.0	79.0
LY0011-0050	GPH185-16	17.0	24.2	19.0	35.1	32.0	83.0
LY0011-0051	GPH240-12	13.2	26.2	21.0	37.7	36.0	89.0
LY0011-0052	GPH240-16	17.0	26.2	21.0	37.7	36.0	89.0
LY0011-0053	GPH240-20	21.0	26.2	21.0	37.7	36.0	95.0
LY0011-0054	GPH300-12	13.2	30.2	24.0	44.0	44.0	110.0
LY0011-0055	GPH300-16	17.0	30.2	24.0	44.0	44.0	110.0
LY0011-0056	GPH300-20	21.0	30.2	24.0	44.0	44.0	110.0
LY0011-0057	GPH400-16	17.0	33.7	27.5	49.0	50.0	119.0
LY0011-0058	GPH400-20	21.0	33.7	27.5	49.0	50.0	119.0

DIN46235 COPPER TUBE TERMINALS DIN46235銅管端子 UL:E357535





- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0012-2001	DIN6-5	5.3	5.5	3.8	8.5	10.0	30.5
LY0012-2002	DIN6-6	6.4	5.5	3.8	8.5	10.0	31.5
LY0012-2003	DIN6-8	8.4	5.5	3.8	13.0	10.0	34.0
LY0012-2004	DIN10-5	5.3	6.0	4.5	9.0	10.0	34.0
LY0012-2005	DIN10-6	6.4	6.0	4.5	9.0	10.0	34.5
LY0012-2006	DIN10-8	8.4	6.0	4.5	13.0	10.0	37.0
LY0012-2007	DIN10-10	10.5	6.0	4.5	15.0	10.0	39.0
LY0012-2008	DIN16-6	6.4	8.5	5.5	13.0	20.0	43.5
LY0012-2009	DIN16-8	8.4	8.5	5.5	13.0	20.0	46.0
LY0012-2010	DIN16-10	10.5	8.5	5.5	17.0	20.0	48.0
LY0012-2011	DIN16-12	13.0	8.5	5.5	18.0	20.0	49.0
LY0012-2012	DIN25-6	6.4	10.0	7.0	14.0	20.0	45.5
LY0012-2013	DIN25-8	8.4	10.0	7.0	16.0	20.0	48.0
LY0012-2014	DIN25-10	10.5	10.0	7.0	17.0	20.0	50.0
LY0012-2015	DIN25-12	13.0	10.0	7.0	19.0	20.0	51.0
LY0012-2016	DIN35-6	6.4	12.5	8.2	17.0	20.0	49.5
LY0012-2017	DIN35-8	8.4	12.5	8.2	17.0	20.0	52.0
LY0012-2018	DIN35-10	10.5	12.5	8.2	19.0	20.0	54.0
LY0012-2019	DIN35-12	13.0	12.5	8.2	21.0	20.0	55.0
LY0012-2020	DIN35-14	15.0	12.5	8.2	21.0	20.0	56.5
LY0012-2021	DIN50-8	8.4	14.5	10.0	20.0	28.0	62.0
LY0012-2022	DIN50-10	10.5	14.5	10.0	22.0	28.0	64.0
LY0012-2023	DIN50-12	13.0	14.5	10.0	24.0	28.0	65.0
LY0012-2024	DIN50-14	15.0	14.5	10.0	24.0	28.0	66.5
LY0012-2025	DIN50-16	17.0	14.5	10.0	28.0	28.0	68.0
LY0012-2026	DIN70-8	8.4	16.5	11.5	24.0	28.0	65.0
LY0012-2027	DIN70-10	10.5	16.5	11.5	24.0	28.0	67.0
LY0012-2028	DIN70-12	13.0	16.5	11.5	24.0	28.0	68.0
LY0012-2029	DIN70-14	15.0	16.5	11.5	24.0	28.0	69.5
LY0012-2030	DIN70-16	17.0	16.5	11.5	30.0	28.0	71.0
LY0012-2031	DIN95-8	8.4	19.0	13.5	28.0	35.0	77.0
LY0012-2032	DIN95-10	10.5	19.0	13.5	28.0	35.0	77.0
LY0012-2033	DIN95-12	13.0	19.0	13.5	28.0	35.0	78.0
LY0012-2034	DIN95-14	15.0	19.0	13.5	28.0	35.0	79.5
LY0012-2035	DIN95-16	17.0	19.0	13.5	32.0	35.0	81.0

PART NO	ITEM NO	DIMENSIONS					
		φ E	φ D	φ d	W	B	L
LY0012-2036	DIN120-10	10.5	21.0	15.5	30.0	35.0	85.0
LY0012-2037	DIN120-12	13.0	21.0	15.5	30.0	35.0	86.0
LY0012-2038	DIN120-14	15.0	21.0	15.5	30.0	35.0	88.0
LY0012-2039	DIN120-16	17.0	21.0	15.5	30.0	35.0	89.0
LY0012-2040	DIN120-20	21.0	21.0	15.5	38.0	35.0	91.0
LY0012-2041	DIN150-10	10.5	23.5	17.0	34.0	35.0	93.0
LY0012-2042	DIN150-12	13.0	23.5	17.0	34.0	35.0	94.0
LY0012-2043	DIN150-14	15.0	23.5	17.0	34.0	35.0	97.0
LY0012-2044	DIN150-16	17.0	23.5	17.0	34.0	35.0	97.0
LY0012-2045	DIN150-20	21.0	23.5	17.0	40.0	35.0	99.0
LY0012-2046	DIN185-10	10.5	25.5	19.0	37.0	40.0	97.0
LY0012-2047	DIN185-12	13.0	25.5	19.0	37.0	40.0	98.0
LY0012-2048	DIN185-14	15.0	25.5	19.0	37.0	40.0	101.0
LY0012-2049	DIN185-16	17.0	25.5	19.0	37.0	40.0	101.0
LY0012-2050	DIN185-20	21.0	25.5	19.0	40.0	40.0	103.0
LY0012-2051	DIN240-12	13.0	29.0	21.5	42.0	40.0	108.0
LY0012-2052	DIN240-14	15.0	29.0	21.5	42.0	40.0	111.0
LY0012-2053	DIN240-16	17.0	29.0	21.5	42.0	40.0	111.0
LY0012-2054	DIN240-20	21.0	29.0	21.5	45.0	40.0	113.0
LY0012-2055	DIN300-12	13.0	32.0	24.5	46.0	50.0	119.0
LY0012-2056	DIN300-14	15.0	32.0	24.5	46.0	50.0	119.0
LY0012-2057	DIN300-16	17.0	32.0	24.5	46.0	50.0	119.0
LY0012-2058	DIN300-20	21.0	32.0	24.5	46.0	50.0	122.0
LY0012-2059	DIN400-14	15.0	38.5	27.5	55.0	70.0	140.0
LY0012-2060	DIN400-16	17.0	38.5	27.5	55.0	70.0	140.0
LY0012-2061	DIN400-20	21.0	38.5	27.5	55.0	70.0	140.0
LY0012-2062	DIN500-16	17.0	42.0	31.0	60.0	70.0	150.0
LY0012-2063	DIN500-20	21.0	42.0	31.0	60.0	70.0	150.0
LY0012-2064	DIN625-16	17.0	44.0	34.5	64.0	80.0	160.0
LY0012-2065	DIN625-20	21.0	44.0	34.5	64.0	80.0	160.0
LY0012-2066	DIN800-16	17.0	52.0	40.0	75.0	100.0	195.0
LY0012-2067	DIN800-20	21.0	52.0	40.0	75.0	100.0	195.0
LY0012-2068	DIN1000-16	17.0	58.0	44.0	85.0	100.0	195.0
LY0012-2069	DIN1000-20	21.0	58.0	44.0	85.0	100.0	195.0

TU BELL-MOUTH COPPER TUBE TERMINALS TU 喇叭口銅管端子





◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		Φ E	Φ D	Φ d	W	B	L
LY0013-0001	TU10-5	5.3	6.9	4.4	10.5	9.0	27.0
LY0013-0002	TU10-6	6.4	6.9	4.4	10.5	9.0	27.0
LY0013-0003	TU10-8	8.4	6.9	4.4	14.0	10.0	35.0
LY0013-0004	TU10-10	10.4	6.9	4.4	16.0	10.0	39.0
LY0013-0005	TU10-12	12.8	6.9	4.4	18.0	10.0	39.0
LY0013-0006	TU16-5	5.3	8.0	5.6	11.0	11.0	29.5
LY0013-0007	TU16-6	6.4	8.0	5.6	11.0	11.0	29.5
LY0013-0008	TU16-8	8.4	8.0	5.6	14.0	11.0	38.0
LY0013-0009	TU16-10	10.4	8.0	5.6	16.0	11.0	42.0
LY0013-0010	TU16-12	12.8	8.0	5.6	18.0	11.0	42.0
LY0013-0011	TU25-5	5.3	9.5	7.0	13.5	13.0	40.0
LY0013-0012	TU25-6	6.4	9.5	7.0	13.5	13.0	40.0
LY0013-0013	TU25-8	8.4	9.5	7.0	13.5	13.0	40.0
LY0013-0014	TU25-10	10.4	9.5	7.0	16.0	13.0	44.0
LY0013-0015	TU25-12	12.8	9.5	7.0	18.0	13.0	44.0
LY0013-0016	TU35-5	5.3	11.0	8.2	15.5	14.0	41.0
LY0013-0017	TU35-6	6.4	11.0	8.2	15.5	14.0	41.0
LY0013-0018	TU35-8	8.4	11.0	8.2	15.5	14.0	41.0
LY0013-0019	TU35-10	10.4	11.0	8.2	15.5	14.0	45.0
LY0013-0020	TU35-12	12.8	11.0	8.2	18.0	14.0	45.0
LY0013-0021	TU35-14	14.5	11.0	8.2	20.0	14.0	50.0
LY0013-0022	TU50-5	5.3	12.1	9.5	17.2	18.0	46.0
LY0013-0023	TU50-6	6.4	12.1	9.5	17.2	18.0	46.0
LY0013-0024	TU50-8	8.4	12.1	9.5	17.2	18.0	46.0
LY0013-0025	TU50-10	10.4	12.1	9.5	17.2	18.0	50.0
LY0013-0026	TU50-12	12.8	12.1	9.5	17.2	18.0	50.0
LY0013-0027	TU50-14	14.5	12.1	9.5	20.0	18.0	55.0
LY0013-0028	TU50-16	16.5	12.1	9.5	22.0	18.0	55.0
LY0013-0029	TU70-5	5.3	15.0	11.5	21.2	18.0	48.0
LY0013-0030	TU70-6	6.4	15.0	11.5	21.2	18.0	48.0
LY0013-0031	TU70-8	8.4	15.0	11.5	21.2	18.0	48.0
LY0013-0032	TU70-10	10.4	15.0	11.5	21.2	18.0	52.0
LY0013-0033	TU70-12	12.8	15.0	11.5	21.2	18.0	52.0
LY0013-0034	TU70-14	14.5	15.0	11.5	21.2	18.0	63.0

PART NO	ITEM NO	DIMENSIONS					
		Φ E	Φ D	Φ d	W	B	L
LY0013-0035	TU70-16	16.5	15.0	11.5	21.2	18.0	63.0
LY0013-0036	TU95-8	8.4	17.0	13.5	24.3	24.0	58.0
LY0013-0037	TU95-10	10.4	17.0	13.5	24.3	24.0	58.0
LY0013-0038	TU95-12	12.8	17.0	13.5	24.3	24.0	58.0
LY0013-0039	TU95-14	14.5	17.0	13.5	24.3	24.0	69.0
LY0013-0040	TU95-16	16.5	17.0	13.5	24.3	24.0	69.0
LY0013-0041	TU120-8	8.4	19.0	15.0	27.2	27.0	73.0
LY0013-0042	TU120-10	10.4	19.0	15.0	27.2	27.0	73.0
LY0013-0043	TU120-12	12.8	19.0	15.0	27.2	27.0	73.0
LY0013-0044	TU120-14	14.5	19.0	15.0	27.2	27.0	73.0
LY0013-0045	TU120-16	16.5	19.0	15.0	27.2	27.0	73.0
LY0013-0046	TU120-20	21.0	19.0	15.0	27.2	27.0	73.0
LY0013-0047	TU150-8	8.4	21.0	16.5	30.0	27.0	78.0
LY0013-0048	TU150-10	10.4	21.0	16.5	30.0	27.0	78.0
LY0013-0049	TU150-12	12.8	21.0	16.5	30.0	27.0	78.0
LY0013-0050	TU150-14	14.5	21.0	16.5	30.0	27.0	78.0
LY0013-0051	TU150-16	16.5	21.0	16.5	30.0	27.0	78.0
LY0013-0052	TU150-20	21.0	21.0	16.5	30.0	27.0	78.0
LY0013-0053	TU185-10	10.4	23.0	18.5	33.5	30.0	82.0
LY0013-0054	TU185-12	12.8	23.0	18.5	33.5	30.0	82.0
LY0013-0055	TU185-14	14.5	23.0	18.5	33.5	30.0	82.0
LY0013-0056	TU185-16	16.5	23.0	18.5	33.5	30.0	82.0
LY0013-0057	TU185-20	21.0	23.0	18.5	33.5	30.0	82.0
LY0013-0058	TU240-10	10.4	26.0	21.0	37.7	32.0	88.0
LY0013-0059	TU240-12	12.8	26.0	21.0	37.7	32.0	88.0
LY0013-0060	TU240-14	14.5	26.0	21.0	37.7	32.0	88.0
LY0013-0061	TU240-16	16.5	26.0	21.0	37.7	32.0	88.0
LY0013-0062	TU240-20	21.0	26.0	21.0	37.7	32.0	88.0
LY0013-0063	TU300-10	10.4	28.0	23.0	41.0	37.0	97.0
LY0013-0064	TU300-12	12.8	28.0	23.0	41.0	37.0	97.0
LY0013-0065	TU300-14	14.5	28.0	23.0	41.0	37.0	97.0
LY0013-0066	TU300-16	16.5	28.0	23.0	41.0	37.0	97.0
LY0013-0067	TU300-20	21.0	28.0	23.0	41.0	37.0	97.0



AWG COPPER TUBE TERMINALS AWG美規銅管端子 UL:E357535



© Material
© Terminal Body: Copper
© Plating: Nature Color

PART NO	ITEM NO	DIMENSIONS					
		ϕE	ϕD	ϕd	W	B	L
LY0014-0001	8#10	5.1	7.1	4.8	11.8	13.0	33.3
LY0014-0002	8*1/4	6.8	7.1	4.8	11.8	13.0	33.3
LY0014-0003	8*5/16	8.3	7.1	4.8	11.8	13.0	33.3
LY0014-0004	8*3/8	10.4	7.1	4.8	14.5	13.0	33.3
LY0014-0005	8*1/2	13.1	7.1	4.8	17.0	13.0	33.3
LY0014-0006	6#10	5.1	8.1	5.9	11.8	15.0	37.3
LY0014-0007	6*1/4	6.8	8.1	5.9	13.7	15.0	37.3
LY0014-0008	6*5/16	8.3	8.1	5.9	13.7	15.0	37.3
LY0014-0009	6*3/8	10.4	8.1	5.9	13.7	15.0	37.3
LY0014-0010	6*1/2	13.1	8.1	5.9	17.0	14.0	37.3
LY0014-0011	4*1/4	6.8	9.5	7.3	13.8	15.5	38.9
LY0014-0012	4*5/16	8.3	9.5	7.3	13.8	15.5	38.9
LY0014-0013	4*3/8	10.4	9.5	7.3	14.5	15.5	38.9
LY0014-0014	4*1/2	13.1	9.5	7.3	17.0	15.0	38.9
LY0014-0015	2*1/4	6.8	11.1	8.5	16.5	16.0	41.1
LY0014-0016	2*5/16	8.3	11.1	8.5	16.5	16.0	41.1
LY0014-0017	2*3/8	10.4	11.1	8.5	16.5	16.0	41.1
LY0014-0018	2*1/2	13.1	11.1	8.5	17.0	15.3	41.1
LY0014-0019	1*1/4	6.8	11.7	9.1	16.4	16.0	43.6
LY0014-0020	1*5/16	8.3	11.7	9.1	16.4	16.0	43.6
LY0014-0021	1*3/8	10.4	11.7	9.1	17.1	16.0	43.6
LY0014-0022	1*1/2	13.1	11.7	9.1	19.1	16.0	43.6
LY0014-0023	1/0 1/4	6.8	13.0	10.4	18.4	19.0	46.8
LY0014-0024	1/0 5/16	8.3	13.0	10.4	18.4	19.0	46.8
LY0014-0025	1/0 3/8	10.4	13.0	10.4	18.4	19.0	46.8
LY0014-0026	1/0 1/2	13.1	13.0	10.4	21.0	19.0	46.8
LY0014-0027	2/0 1/4	6.8	14.2	11.7	21.0	22.0	52.4
LY0014-0028	2/0 5/16	8.3	14.2	11.7	21.0	22.0	52.4
LY0014-0029	2/0 3/8	10.4	14.2	11.7	21.0	22.0	52.4
LY0014-0030	2/0 1/2	13.1	14.2	11.7	21.0	21.0	52.4
LY0014-0031	3/0 5/16	8.3	15.7	13.0	23.1	22.5	55.9
LY0014-0032	3/0 3/8	10.4	15.7	13.0	23.1	22.5	55.9
LY0014-0033	3/0 1/2	13.1	15.7	13.0	23.1	22.5	55.9
LY0014-0034	4/0 5/16	8.3	17.2	14.2	25.8	24.0	60.5
LY0014-0035	4/0 3/8	10.4	17.2	14.2	25.8	24.0	60.5
LY0014-0036	4/0 1/2	13.1	17.2	14.2	25.8	24.0	60.5

GPH 90° COPPER TUBE TERMINALS GPH 90° 銅管端子





- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	L2	L1
LY0015-0001	GPH90-6/5	5.3	6.5	3.5	10.0	14.0	22.5
LY0015-0002	GPH90-6/6	6.4	6.5	3.5	12.0	14.0	24.0
LY0015-0003	GPH90-6/8	8.4	6.5	3.5	15.0	14.0	27.5
LY0015-0004	GPH90-6/10	10.5	6.5	3.5	16.0	14.0	29.5
LY0015-0005	GPH90-10/5	5.3	7.0	4.5	12.0	16.0	23.0
LY0015-0006	GPH90-10/6	6.4	7.0	4.5	12.0	16.0	24.0
LY0015-0007	GPH90-10/8	8.4	7.0	4.5	15.0	16.0	28.0
LY0015-0008	GPH90-10/10	10.5	7.0	4.5	18.0	16.0	29.5
LY0015-0009	GPH90-16/5	5.3	8.5	5.5	12.0	20.0	22.5
LY0015-0010	GPH90-16/6	6.4	8.5	5.5	14.0	20.0	24.0
LY0015-0011	GPH90-16/8	8.4	8.5	5.5	15.0	20.0	28.0
LY0015-0012	GPH90-16/10	10.5	8.5	5.5	18.0	20.0	31.0
LY0015-0013	GPH90-16/12	13.0	8.5	5.5	19.0	20.0	32.0
LY0015-0014	GPH90-25/6	6.4	10.0	6.9	15.0	21.0	27.5
LY0015-0015	GPH90-25/8	8.4	10.0	6.9	16.0	21.0	32.5
LY0015-0016	GPH90-25/10	10.5	10.0	6.9	18.0	21.0	32.5
LY0015-0017	GPH90-25/12	13.0	10.0	6.9	19.0	21.0	34.0
LY0015-0018	GPH90-35/6	6.4	12.0	8.5	17.0	24.0	28.5
LY0015-0019	GPH90-35/8	8.4	12.0	8.5	17.0	24.0	34.0
LY0015-0020	GPH90-35/10	10.5	12.0	8.5	20.0	24.0	34.0
LY0015-0021	GPH90-35/12	13.0	12.0	8.5	22.0	24.0	40.5
LY0015-0022	GPH90-50/6	6.4	14.0	10.0	20.0	28.5	37.0
LY0015-0023	GPH90-50/8	8.4	14.0	10.0	20.0	28.5	40.5
LY0015-0024	GPH90-50/10	10.5	14.0	10.0	20.0	28.5	40.5
LY0015-0025	GPH90-50/12	13.0	14.0	10.0	23.0	28.5	42.5
LY0015-0026	GPH90-50/16	17.0	14.0	10.0	28.0	28.5	50.5
LY0015-0027	GPH90-70/8	8.4	16.5	12.0	24.0	31.0	43.0
LY0015-0028	GPH90-70/10	10.5	16.5	12.0	24.0	31.0	43.0

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	L2	L1
LY0015-0029	GPH90-70/12	13.0	16.5	12.0	24.0	31.0	44.5
LY0015-0030	GPH90-70/16	17.0	16.5	12.0	28.0	31.0	53.0
LY0015-0031	GPH90-70/20	21.0	16.5	12.0	30.0	31.0	59.0
LY0015-0032	GPH90-95/8	8.4	18.0	13.5	26.0	35.0	44.5
LY0015-0033	GPH90-95/10	10.5	18.0	13.5	26.0	35.0	44.5
LY0015-0034	GPH90-95/12	13.0	18.0	13.5	26.0	35.0	46.5
LY0015-0035	GPH90-95/16	17.0	18.0	13.5	28.0	35.0	52.0
LY0015-0036	GPH90-95/20	21.0	18.0	13.5	30.5	35.0	59.0
LY0015-0037	GPH90-120/10	10.5	19.5	15.0	29.0	35.5	49.0
LY0015-0038	GPH90-120/12	13.0	19.5	15.0	29.0	35.5	49.0
LY0015-0039	GPH90-120/16	17.0	19.5	15.0	29.0	35.5	55.0
LY0015-0040	GPH90-120/20	21.0	19.5	15.0	30.5	35.5	61.0
LY0015-0041	GPH90-150/10	10.5	21.0	16.5	31.0	40.0	48.0
LY0015-0042	GPH90-150/12	13.0	21.0	16.5	31.0	40.0	51.0
LY0015-0043	GPH90-150/16	17.0	21.0	16.5	31.0	40.0	56.0
LY0015-0044	GPH90-150/20	21.0	21.0	16.5	34.0	40.0	61.5
LY0015-0045	GPH90-185/12	13.0	24.0	19.0	35.0	46.0	58.5
LY0015-0046	GPH90-185/16	17.0	24.0	19.0	35.0	46.0	58.5
LY0015-0047	GPH90-185/20	21.0	24.0	19.0	35.0	46.0	65.0
LY0015-0048	GPH90-240/12	13.0	26.0	21.0	40.0	50.0	54.0
LY0015-0049	GPH90-240/16	17.0	26.0	21.0	40.0	50.0	60.0
LY0015-0050	GPH90-240/20	21.0	26.0	21.0	40.0	50.0	67.8
LY0015-0051	GPH90-300/12	13.0	29.5	23.5	43.0	59.0	74.5
LY0015-0052	GPH90-300/16	17.0	29.5	23.5	43.0	59.0	64.0
LY0015-0053	GPH90-300/20	21.0	29.5	23.5	43.0	59.0	70.5
LY0015-0054	GPH90-400/12	13.0	34.0	27.0	49.0	62.0	79.0
LY0015-0055	GPH90-400/16	17.0	34.0	27.0	49.0	62.0	68.5
LY0015-0056	GPH90-400/20	21.0	34.0	27.0	49.0	62.0	75.0



AD COPPER TUBE TERMINALS AD 銅管端子



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		φE	φD	φd	W	B	H
LY0016-0001	AD38-8	9.0	11.7	9.5	17.5	12.5	25.4
LY0016-0002	AD60-10	11.0	14.4	11.9	21.3	14.5	25.4
LY0016-0003	AD80-10	11.0	17.9	14.9	26.7	19.5	25.4
LY0016-0004	AD100-10	11.0	20.1	16.8	29.7	19.5	25.4
LY0016-0005	AD125-10	11.0	21.3	17.8	32.0	19.5	25.4
LY0016-0006	AD150-10	11.0	23.4	19.6	35.0	22.8	25.4
LY0016-0007	AD185-12	14.0	25.3	21.1	37.8	23.8	44.5
LY0016-0008	AD200-12	14.0	27.0	22.5	40.4	24.8	44.5
LY0016-0009	AD250-12	14.0	30.2	25.2	45.2	26.8	44.5
LY0016-0010	AD325-12	14.0	33.1	27.6	49.2	36.0	44.5
LY0016-0011	AD400-12	14.0	38.2	31.8	56.9	40.0	44.5
LY0016-0012	AD500-12	14.0	42.7	35.6	63.5	43.0	44.5

L BUTT CONNECTORS L 中间套管 UL:E357535




- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS		
		φD	φd	L
LY0017-0001	L1.5	3.7	1.8	20.0
LY0017-0002	L2.5	4.0	2.4	20.0
LY0017-0003	L4	4.8	3.1	20.0
LY0017-0004	L6	5.5	3.8	20.0
LY0017-0005	L10	6.2	4.5	20.0
LY0017-0006	L16	7.1	5.4	40.0
LY0017-0007	L25	8.8	6.8	45.0
LY0017-0008	L35	10.6	8.2	45.0
LY0017-0009	L50	12.4	9.5	45.0
LY0017-0010	L70	14.7	11.2	50.0
LY0017-0011	L95	17.4	13.5	50.0
LY0017-0012	L120	19.4	15.0	55.0
LY0017-0013	L150	21.2	16.5	60.0
LY0017-0014	L185	23.5	18.5	65.0
LY0017-0015	L240	26.5	21.0	80.0
LY0017-0016	L300	30.0	23.5	85.0
LY0017-0017	L400	36.5	28.5	90.0
LY0017-0018	L500	39.0	30.0	100.0
LY0017-0019	L550	41.4	31.7	100.0
LY0017-0020	L630	45.0	35.0	110.0
LY0017-0021	L800	50.6	39.0	150.0
LY0017-0022	L1000	56.2	43.0	170.0
LY0017-0023	A-L1.5	3.6	1.8	20.0
LY0017-0024	A-L2.5	3.9	2.4	20.0
LY0017-0025	A-L4	4.7	3.1	20.0
LY0017-0026	A-L6	5.4	3.8	20.0
LY0017-0027	A-L10	6.1	4.5	20.0
LY0017-0028	A-L16	7.0	5.4	40.0
LY0017-0029	A-L25	8.6	6.8	45.0
LY0017-0030	A-L35	10.4	8.2	45.0
LY0017-0031	A-L50	12.2	9.5	45.0
LY0017-0032	A-L70	14.4	11.2	50.0
LY0017-0033	A-L95	17.1	13.5	50.0
LY0017-0034	A-L120	19.0	15.0	55.0
LY0017-0035	A-L150	20.8	16.5	60.0
LY0017-0036	A-L185	23.1	18.5	65.0
LY0017-0037	A-L240	26.0	21.0	80.0
LY0017-0038	A-L300	29.4	23.5	85.0
LY0017-0039	A-L400	35.8	28.5	90.0
LY0017-0040	A-L500	38.2	30.0	100.0


PART NO	ITEM NO	DIMENSIONS		
		φD	φd	L
LY0017-0041	A-L630	44.1	35.0	110.0
LY0017-0042	B-L1.5	3.4	1.8	20.0
LY0017-0043	B-L2.5	3.7	2.4	20.0
LY0017-0044	B-L4	4.5	3.1	20.0
LY0017-0045	B-L6	5.2	3.8	20.0
LY0017-0046	B-L10	5.9	4.5	20.0
LY0017-0047	B-L16	6.8	5.4	40.0
LY0017-0048	B-L25	8.4	6.8	45.0
LY0017-0049	B-L35	10.2	8.2	45.0
LY0017-0050	B-L50	11.9	9.5	45.0
LY0017-0051	B-L70	14.1	11.2	50.0
LY0017-0052	B-L95	16.7	13.5	50.0
LY0017-0053	B-L120	18.6	15.0	55.0
LY0017-0054	B-L150	20.4	16.5	60.0
LY0017-0055	B-L185	22.6	18.5	65.0
LY0017-0056	B-L240	25.5	21.0	80.0
LY0017-0057	B-L300	28.8	23.5	85.0
LY0017-0058	B-L400	35.1	28.5	90.0
LY0017-0059	B-L500	37.4	30.0	100.0
LY0017-0060	B-L630	43.2	35.0	110.0
LY0017-0061	C-L1.5	3.3	1.8	20.0
LY0017-0062	C-L2.5	3.6	2.4	20.0
LY0017-0063	C-L4	4.4	3.1	20.0
LY0017-0064	C-L6	5.1	3.8	20.0
LY0017-0065	C-L10	5.8	4.5	20.0
LY0017-0066	C-L16	6.6	5.4	40.0
LY0017-0067	C-L25	8.3	6.8	45.0
LY0017-0068	C-L35	10.0	8.2	45.0
LY0017-0069	C-L50	11.6	9.5	45.0
LY0017-0070	C-L70	13.8	11.2	50.0
LY0017-0071	C-L95	16.4	13.5	50.0
LY0017-0072	C-L120	18.2	15.0	55.0
LY0017-0073	C-L150	19.9	16.5	60.0
LY0017-0074	C-L185	22.1	18.5	65.0
LY0017-0075	C-L240	25.0	21.0	80.0
LY0017-0076	C-L300	28.2	23.5	85.0
LY0017-0077	C-L400	34.3	28.5	90.0
LY0017-0078	C-L500	36.5	30.0	100.0
LY0017-0079	C-L630	42.2	35.0	110.0

B BUTT CONNECTORS B 中间套管

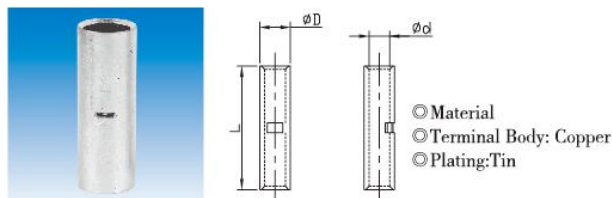


PART NO	ITEM NO	DIMENSIONS		
		φ D	φ d	L
LY0017-1001	T-B1.25	3.3	2.1	16.5
LY0017-1002	T-B2	3.7	2.6	14.9
LY0017-1003	T-B3.5	5.0	3.6	16.5
LY0017-1004	T-B5.5	5.5	4.0	16.5
LY0017-1005	T-B8	6.7	5.1	20.2
LY0017-1006	T-B14	8.5	6.4	24.7
LY0017-1007	T-B22	10.8	8.2	27.5
LY0017-1008	T-B38	12.7	10.1	30.2
LY0017-1009	T-B60	14.7	12.0	32.4
LY0017-1010	T-B70	16.8	14.1	33.4
LY0017-1011	T-B80	18.6	15.4	35.6
LY0017-1012	T-B100	21.1	17.6	35.6
LY0017-1013	T-B125	23.1	19.2	39.1
LY0017-1014	T-B150	25.0	20.9	50.0
LY0017-1015	T-B180	28.3	22.9	56.0
LY0017-1016	T-B200/250	31.1	25.7	58.0
LY0017-1017	T-B325	35.4	29.0	66.2
LY0017-1018	B1.25	3.3	1.9	16.5
LY0017-1019	B2	4.0	2.6	16.5
LY0017-1020	B5.5	5.5	3.7	16.5
LY0017-1021	B8	7.1	5.1	22.5
LY0017-1022	B14	9.0	6.4	27.5
LY0017-1023	B22	11.4	8.2	30.5
LY0017-1024	B38	13.3	10.1	33.5
LY0017-1025	B60	15.4	12.0	36.0
LY0017-1026	B70	17.4	14.0	37.8
LY0017-1027	B80	19.4	15.4	39.5
LY0017-1028	B100	22.0	17.6	39.5
LY0017-1029	B125	24.1	19.2	43.4
LY0017-1030	B150	26.0	20.9	55.5
LY0017-1031	B180	28.6	22.0	58.5
LY0017-1032	B200/250	32.5	25.7	64.5
LY0017-1033	B325	37.0	29.0	73.5

M BUTT CONNECTORS M 中间套管

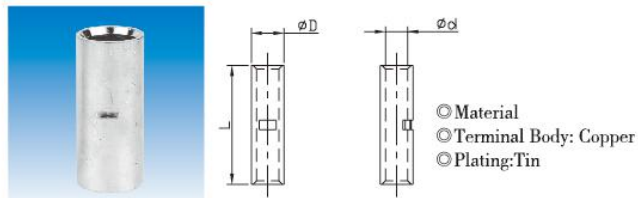

PART NO	ITEM NO	DIMENSIONS		
		φ D	φ d	L
LY0017-2001	M1.5	4.0	2.4	22.0
LY0017-2002	M2.5	4.3	2.7	22.0
LY0017-2003	M4	4.8	3.1	25.0
LY0017-2004	M6	5.5	3.8	25.0
LY0017-2005	M10	6.9	4.7	25.0
LY0017-2006	M16	7.8	5.6	29.0
LY0017-2007	M25	9.5	7.1	29.0
LY0017-2008	M35	11.0	8.2	35.0
LY0017-2009	M40	11.2	9.0	35.0
LY0017-2010	M50	12.5	9.5	35.0
LY0017-2011	M70	15.0	11.5	45.0
LY0017-2012	M95	17.0	13.5	47.0
LY0017-2013	M120	20.0	15.6	52.0
LY0017-2014	M150	21.0	16.5	59.0
LY0017-2015	M185	23.6	18.4	65.0
LY0017-2016	M240	26.4	21.2	75.0
LY0017-2017	M300	28.6	23.4	90.0
LY0017-2018	M400	32.8	26.8	106.0
LY0017-2019	S-M1.5	3.3	1.8	15.0
LY0017-2020	S-M2.5	4.3	2.7	15.0
LY0017-2021	S-M4	5.0	3.3	22.0
LY0017-2022	S-M6	5.5	3.8	22.0
LY0017-2023	S-M10	6.8	4.7	25.0
LY0017-2024	S-M16	7.8	5.6	27.0
LY0017-2025	S-M25	9.4	7.1	29.0
LY0017-2026	S-M35	11.3	8.7	33.0
LY0017-2027	S-M50	12.6	9.8	35.0
LY0017-2028	S-M70	14.7	11.5	39.0
LY0017-2029	S-M95	16.9	13.5	43.0
LY0017-2030	S-M120	19.9	15.6	47.0
LY0017-2031	S-M150	20.9	16.5	58.0
LY0017-2032	S-M185	23.7	18.8	64.0
LY0017-2033	S-M240	26.2	21.2	75.0
LY0017-2034	S-M300	28.6	23.4	90.0
LY0017-2035	S-M400	32.8	26.8	90.0


TBC BUTT CONNECTORS TBC 中间套管



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS		
		φD	φd	L
LY0017-3001	TBC1.5	3.7	1.8	16.0
LY0017-3002	TBC2.5	3.9	2.3	20.0
LY0017-3003	TBC4	4.7	3.0	20.0
LY0017-3004	TBC6	5.9	4.0	20.0
LY0017-3005	TBC10	6.6	4.5	23.0
LY0017-3006	TBC16	7.5	5.5	30.0
LY0017-3007	TBC25	9.1	6.7	35.0
LY0017-3008	TBC35	11.0	8.6	40.0
LY0017-3009	TBC50	12.4	9.5	40.0
LY0017-3010	TBC70	15.0	12.0	45.0
LY0017-3011	TBC95	17.0	13.4	45.0
LY0017-3012	TBC120	19.0	15.0	50.0
LY0017-3013	TBC150	21.2	16.5	55.0
LY0017-3014	TBC185	23.0	19.0	60.0
LY0017-3015	TBC240	26.5	21.0	60.0
LY0017-3016	TBC300	30.0	24.5	70.0
LY0017-3017	TBC400	35.0	27.0	80.0


CL BUTT CONNECTORS CL 中间套管



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin


PART NO	ITEM NO	DIMENSIONS		
		φD	φd	L
LY0017-4001	CL6	5.5	3.8	30.0
LY0017-4002	CL10	6.0	4.5	30.0
LY0017-4003	CL16	7.8	5.6	50.0
LY0017-4004	CL25	9.5	7.1	50.0
LY0017-4005	CL35	11.0	8.2	50.0
LY0017-4006	CL50	13.0	10.0	56.0
LY0017-4007	CL70	15.0	11.5	56.0
LY0017-4008	CL95	17.0	13.5	70.0
LY0017-4009	CL120	20.0	15.6	70.0
LY0017-4010	CL150	21.2	16.8	80.0
LY0017-4011	CL185	23.6	18.9	85.0
LY0017-4012	CL240	26.5	21.5	90.0
LY0017-4013	CL300	30.0	24.5	100.0
LY0017-4014	CL400	35.0	27.5	150.0
LY0017-4015	CL500	39.0	31.0	160.0
LY0017-4016	CL630	44.0	34.5	160.0

B-GA BUTT CONNECTORS B-GA 中间套管



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Nature Color


PART NO	ITEM NO	DIMENSIONS		
		φD	φd	L
LY0017-5001	B-8GA	7.1	4.8	25.4
LY0017-5002	B-6GA	8.1	5.9	27.9
LY0017-5003	B-4GA	9.5	7.3	31.8
LY0017-5004	B-2GA	11.1	8.5	35.6
LY0017-5005	B-1GA	11.7	9.1	35.6
LY0017-5006	B-1/0	13.0	10.4	40.6
LY0017-5007	B-2/0	14.2	11.7	47.0
LY0017-5008	B-3/0	15.7	13.0	49.5
LY0017-5009	B-4/0	17.2	14.2	52.1



- ◎Material
- ◎Terminal Body: Brass
- ◎Plating: Tin

PART NO	ITEM NO	DIMENSIONS		
		D	d	L
LY0017-6001	SL6	8.5	3.5	20.0
LY0017-6002	SL10	9.4	4.4	30.0
LY0017-6003	SL16	10.5	5.5	40.0
LY0017-6004	SL25	11.8	6.8	45.0
LY0017-6005	SL35	13.2	8.2	45.0
LY0017-6006	SL50	14.5	9.5	48.0
LY0017-6007	SL70	16.2	11.2	52.0
LY0017-6008	SL95	19.4	13.4	55.0
LY0017-6009	SL120	21.0	15.0	55.0
LY0017-6010	SL150	22.5	16.5	60.0
LY0017-6011	SL185	25.0	19.0	60.0
LY0017-6012	SL240	27.0	21.0	65.0
LY0017-6013	SL300	30.5	23.5	65.0


C SHAPE COPPER WIRE CLAMPS C形夾



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Nature Color

PART NO	ITEM NO	DIMENSIONS				
		B	D	E	C	L
LY0018-0001	CRC-4	12.0	19.5	3.9	7.3	17.6
LY0018-0002	CRC-5	14.1	20.6	4.2	9.1	17.7
LY0018-0003	CRC-7	18.2	26.7	5.1	11.9	21.3
LY0018-0004	CRC-9	21.5	34.2	6.2	11.2	27.2
LY0018-0005	CRC-12	27.5	39.9	8.0	14.3	29.1
LY0018-0006	CRC-13	30.0	44.3	8.5	16.2	30.3
LY0018-0007	CRC-15	36.3	45.2	5.8	17.2	30.2
LY0018-0008	CRC-16	36.6	53.8	9.5	20.45	35.2


C SHAPE COPPER WIRE CLAMPS C形夾



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Nature Color


PART NO	ITEM NO	DIMENSIONS					
		B	D	E	A	C	L
LY0018-0009	CRC-3	10.5	18.7	6.9	6.3	7.7	17.5
LY0018-0010	CRC-6	15.4	25.2	9.3	9.6	9.3	21.2
LY0018-0011	CRC-8	18.4	33.3	11.3	11.9	11.9	27.2
LY0018-0012	CRC-10	22.3	42.0	13.1	13.2	14.8	29.2
LY0018-0013	CRC-11	24.8	41.0	14.6	14.3	14.0	29.4
LY0018-0014	CRC-14	31.5	44.5	15.2	15.0	18.6	27.5

INSULATED SOCKET CONNECTORS 子弹型母端子 UL: E357535




PART NO	ITEM NO	DIMENSIONS				WIRE RANGE		
		12	11	L	± D	Twine mm ²	AWG	COLOR
LY0019-0001	F1.25B	12.5	10.5	23.0	3.86	0.57 ~ 1.25	18 ~ 16	● RED
LY0019-0002	F2B(4)	12.5	10.5	23.0	3.86	1.25 ~ 2.0	16 ~ 14	● BLUE
LY0019-0003	F2B(5)	12.5	10.5	23.0	4.86	1.25 ~ 2.0	16 ~ 14	● BLUE
LY0019-0004	F5.5B(4)	13.5	12.0	25.5	3.86	2.63 ~ 6.64	12 ~ 10	● YELLOW
LY0019-0005	F5.5B(5)	13.5	12.0	25.5	4.86	2.63 ~ 6.64	12 ~ 10	● YELLOW

INSULATED BULLET CONNECTORS 子弹型公端子 UL: E357535



PART NO	ITEM NO	DIMENSIONS				WIRE RANGE		
		± d	± D	B	L	Twine mm ²	AWG	COLOR
LY0019-1001	F1.25A	3.96	3.5	9.8	20.5	0.57 ~ 1.25	18 ~ 16	● RED
LY0019-1002	F2A(4)	3.96	4.2	9.8	20.5	1.25 ~ 2.0	16 ~ 14	● BLUE
LY0019-1003	F2A(5)	4.96	4.2	9.8	20.5	1.25 ~ 2.0	16 ~ 14	● BLUE
LY0019-1004	F5.5A(4)	3.96	5.5	13.7	25.1	2.63 ~ 6.64	12 ~ 10	● YELLOW
LY0019-1005	F5.5A(5)	4.96	5.5	13.7	25.1	2.63 ~ 6.64	12 ~ 10	● YELLOW


INSULATED BUTT CONNECTORS 绝缘中间套管 UL: E357535



- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS				WIRE RANGE			
		d	D	L	l	Single mm	Twine mm ²	AWG	COLOR
LY0019-2001	BF1.25	2.0	4.0	23.0	15	0.57-1.44	0.57-1.25	22-16	● RED
LY0019-2002	BF2	2.4	4.5	23.2	15	1.44-1.82	1.25-2.0	16-14	● BLUE
LY0019-2003	BF5.5	3.6	6.3	25.5	15	1.82-2.98	2.65-6.64	12-10	● YELLOW
LY0019-2004	BF8	5.1	8.5	35.8	19.2	2.89-3.65	6.64-10.52	8	● RED



INSULATED BUTT CONNECTORS 尼龙绝缘中间套管 UL: E357535



- ◎ Material
- ◎ Insulation: Nylon
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					WIRE RANGE		
		D ± 0.3	D1 ± 0.2	d ± 0.2	l ± 0.5	L ± 0.8	Single mm	Twine mm ²	AWG
LY0019-3001	BF1.25FLP	4.0	3.4	2.4	15.0	25.0	0.57-1.44	0.57-1.25	22-16
LY0019-3002	BF2FLP	4.6	4.0	3.0	15.0	25.5	1.44-1.82	1.25-2.0	16-14
LY0019-3003	BF5.5FLP	6.6	5.5	4.5	15.0	28.0	1.82-2.98	2.65-6.64	12-10



NON-INSULATED RING TERMINALS 圓型裸端子 UL:E357535



◎Material
◎Terminal Body: Copper
◎Plating: Tin

PART NO	ITEM NO	WIRE RANGE		DIMENSIONS						
		AWG/MCM	mm ²	φE	φD	φd	W	B	L	T
LY0020-0001	1.25-3			3.7	3.4	1.7	5.5	4.5	11.5	
LY0020-0002	1.25-3A			3.2	3.4	1.7	5.5	4.5	11.5	
LY0020-0003	1.25-3M			3.7	3.4	1.7	6.6	4.5	14.4	
LY0020-0004	1.25-4			4.3	3.4	1.7	8.0	4.5	15.8	
LY0020-0005	1.25-4M	22-16	0.25-1.65	4.3	3.4	1.7	6.6	4.5	14.4	0.8
LY0020-0006	1.25-5			5.3	3.4	1.7	8.0	4.5	15.8	
LY0020-0007	1.25-6			6.4	3.4	1.7	11.6	4.5	21.7	
LY0020-0008	1.25-8			8.4	3.4	1.7	11.6	4.5	21.7	
LY0020-0009	1.25-10			10.5	3.4	1.7	13.6	4.5	26.0	
LY0020-0010	2-3A			3.2	4.0	2.3	8.5	4.8	16.8	
LY0020-0011	2-3			3.7	4.0	2.3	8.5	4.8	16.8	
LY0020-0012	2-3M			3.7	4.0	2.3	6.6	4.8	14.4	
LY0020-0013	2-4			4.3	4.0	2.3	8.5	4.8	16.8	
LY0020-0014	2-4M	16-14	1.04-2.63	4.3	4.0	2.3	6.6	4.8	14.4	0.8
LY0020-0015	2-5			5.3	4.0	2.3	9.5	4.8	16.8	
LY0020-0016	2-6			6.4	4.0	2.3	12.0	4.8	21.8	
LY0020-0017	2-7			7.1	4.0	2.3	12.0	4.8	21.8	
LY0020-0018	2-8			8.4	4.0	2.3	12.0	4.8	21.8	
LY0020-0019	2-10			10.5	4.0	2.3	13.6	4.8	25.5	
LY0020-0020	3.5-4			4.3	5.0	3.2	9.5	6.8	20.0	
LY0020-0021	3.5-5	12-10	2.63-4.60	5.3	5.0	3.2	9.5	6.8	20.0	0.8
LY0020-0022	3.5-6			6.4	5.0	3.2	12.0	6.8	21.4	
LY0020-0023	3.5-8			8.4	5.0	3.2	12.0	6.8	21.4	
LY0020-0024	5.5-3			3.7	5.6	3.5	9.5	6.8	19.8	
LY0020-0025	5.5-4			4.3	5.6	3.5	9.5	6.8	19.8	
LY0020-0026	5.5-5			5.3	5.6	3.5	9.5	6.8	19.8	
LY0020-0027	5.5-6	8	4.60-6.64	6.4	5.6	3.5	12.0	6.8	25.8	1.0
LY0020-0028	5.5-6S			6.4	5.6	3.5	12.0	6.8	22.5	
LY0020-0029	5.5-8			8.4	5.6	3.5	15.0	6.8	28.0	
LY0020-0030	5.5-10			10.5	5.6	3.5	15.0	6.8	28.0	
LY0020-0031	8-3			3.7	7.0	4.5	10.0	8.0	21.0	
LY0020-0032	8-4			4.3	7.0	4.5	10.0	8.0	21.0	
LY0020-0033	8-5			5.3	7.0	4.5	10.0	8.0	21.0	
LY0020-0034	8-6	8	6.64-10.52	6.4	7.0	4.5	11.0	8.0	22.5	1.15
LY0020-0035	8-8			8.4	7.0	4.5	14.0	8.0	27.0	
LY0020-0036	8-10			10.5	7.0	4.5	18.0	8.0	30.0	
LY0020-0037	8-12			13.0	7.0	4.5	18.0	8.0	30.0	
LY0020-0038	14-5			5.3	8.5	5.9	11.0	11.0	25.5	
LY0020-0039	14-6			6.4	8.5	5.9	11.0	11.0	25.5	
LY0020-0040	14-8	6	10.52-16.78	8.4	8.5	5.9	14.0	11.0	31.0	1.2
LY0020-0041	14-10			10.5	8.5	5.9	18.0	11.0	33.0	
LY0020-0042	14-12			13.0	8.5	5.9	18.0	11.0	33.0	
LY0020-0043	22-6			6.4	11.0	7.8	12.0	11.0	31.0	
LY0020-0044	22-8	4	16.78-26.66	8.4	11.0	7.8	16.0	11.0	34.0	1.5
LY0020-0045	22-10			10.5	11.0	7.8	18.0	11.0	35.0	
LY0020-0046	22-12			13.0	11.0	7.8	18.0	11.0	35.0	
LY0020-0047	38-6			6.4	13.0	9.6	15.3	14.0	37.7	
LY0020-0048	38-8	2	26.66-42.42	8.4	13.0	9.6	15.3	14.0	37.7	1.6
LY0020-0049	38-10			10.5	13.0	9.6	15.3	14.0	37.7	
LY0020-0050	38-12			13.0	13.0	9.6	22.0	14.0	43.0	



NON-INSULATED RING TERMINALS 圓型裸端子 UL:E357535



©Material
©Terminal Body: Copper
©Plating: Tin

PART NO	ITEM NO	WIRE RANGE		DIMENSIONS						
		AWG/MCM	mm ²	φ E	φ D	φ d	W	B	L	T
LY0020-0051	60-8	0	42.42-60.57	8.4	15.3	11.9	22.0	17.0	44.0	1.7
LY0020-0052	60-10			10.5	15.3	11.9	22.0	17.0	44.0	
LY0020-0053	60-12			13.0	15.3	11.9	22.0	17.0	44.0	
LY0020-0054	46112/1.25-3	22-18	0.25-1.50	3.7	3.2	1.6	6.6	6.5	17.9	0.76
LY0020-0055	46113/1.25-4			4.4	3.2	1.6	8.0	6.5	18.7	
LY0020-0056	46114/1.25-5			5.0	3.2	1.6	8.0	6.5	19.0	
LY0020-0057	46115/1.25-6			6.8	3.2	1.6	11.8	6.5	23.6	
LY0020-0058	46312/2-3	16-14	1.50-2.50	3.7	4.0	2.3	8.0	6.5	20.2	0.8
LY0020-0059	46313/2-4			4.4	4.0	2.3	8.0	6.5	20.2	
LY0020-0060	46314/2-5			5.0	4.0	2.3	8.0	6.5	20.2	
LY0020-0061	46315/2-6			6.4	4.0	2.3	11.8	6.5	23.5	
LY0020-0062	46316/2-8			8.4	4.0	2.3	11.8	6.5	23.5	
LY0020-0063	46317/2-10			10.0	4.0	2.3	13.5	6.5	24.3	
LY0020-0064	46413/5.5-4	12-10	4-6	4.4	5.6	3.5	9.4	6.75	22.85	1.0
LY0020-0065	46414/5.5-5			5.0	5.6	3.5	9.4	6.75	22.85	
LY0020-0066	46415/5.5-6			6.8	5.6	3.5	13.3	6.75	25.3	
LY0020-0067	46416/5.5-8			8.4	5.6	3.5	13.3	6.75	25.7	
LY0020-0068	46417/5.5-10			10.0	5.6	3.5	15.0	6.75	26.8	
LY0020-0069	46419/5.5-12			13.2	5.6	3.5	18.2	6.75	28.5	
LY0020-0070	LY8-5	8	6.64-10.52	5.3	7.0	4.5	12.0	8.5	23.8	1.2
LY0020-0071	LY8-6			6.4	7.0	4.5	12.0	8.5	23.8	
LY0020-0072	LY8-8			8.4	7.0	4.5	15.0	8.5	29.8	
LY0020-0073	LY8-10			10.5	7.0	4.5	15.0	8.5	29.8	
LY0020-0074	LY14-5	6	10.52-16.78	5.3	9.3	5.8	12.0	10.0	27.5	1.7
LY0020-0075	LY14-6			6.4	9.3	5.8	12.0	10.0	27.5	
LY0020-0076	LY14-8			8.4	9.3	5.8	16.0	10.0	32.5	
LY0020-0077	LY14-10			10.5	9.3	5.8	16.0	10.0	32.5	
LY0020-0078	LY22-6	4	16.78-26.66	6.4	11.3	7.7	16.5	12.0	33.7	1.8
LY0020-0079	LY22-8			8.4	11.3	7.7	16.5	12.0	33.7	
LY0020-0080	LY22-10			10.5	11.3	7.7	16.5	12.0	36.7	
LY0020-0081	LY38-6	2	26.66-42.42	6.4	13.4	9.4	22.0	14.0	41.0	2.0
LY0020-0082	LY38-8			8.4	13.4	9.4	22.0	14.0	41.0	
LY0020-0083	LY38-10			10.5	13.4	9.4	22.0	14.0	43.0	
LY0020-0084	LY38-12			13.0	13.4	9.4	22.0	14.0	43.0	
LY0020-0085	LY70-8	00	60.51-76.28	8.4	17.5	13.5	27.0	19.0	52.5	2.0
LY0020-0086	LY70-10	00	60.51-76.28	10.5	17.5	13.5	27.0	19.0	52.5	
LY0020-0087	LY70-12	00	60.51-76.28	13	17.5	13.5	27.0	19.0	52.5	
LY0020-0088	8-6	8	6.64-10.52	6.4	6.8	4.6	12.0	8.5	23.8	1.0
LY0020-0089	14-8	6	10.52-16.78	8.4	8.8	6.4	16.0	10.0	32.5	1.2
LY0020-0090	22-8	4	16.78-26.66	8.4	11.0	7.8	16.5	12.0	33.7	1.55
LY0020-0091	38-10	2	26.66-42.42	10.5	12.8	9.6	22.0	14.0	43.0	1.6
LY0020-0092	60-12	0	42.42-60.57	13.0	15.4	11.6	22.0	18.0	49.7	1.8
LY0020-0093	100-12	000	96.30-117.2	13.0	21.7	16.4	28.5	21.0	55.6	2.5


NON-INSULATED RING TERMINALS DIN46234 銅皮端子 UL:E357535



©Material
©Terminal Body: Copper
©Plating: Tin

PART NO	ITEM NO	WIRE RANGE		DIMENSIONS						
		AWG/MCM	mm ²	φ E	φ d	W	B	L	T	L
LY0020-1001	2-0.5			2.2		5.0		10.00		12.5
LY0020-1002	2.5-0.5			2.7		5.0		10.00		12.5
LY0020-1003	3-0.5			3.2		5.0		10.00		12.5
LY0020-1004	3.5-0.5			3.7		6.0		12.00		15.0
LY0020-1005	4-0.5			4.3		6.5		12.00		15.3
LY0020-1006	5-0.5			5.3		8.0		12.00		16.0
LY0020-1007	2.5-1			2.7		6.0		11.00		14.0
LY0020-1008	3-1			3.2		6.0		11.00		14.0
LY0020-1009	3.5-1			3.7		6.0		11.00		14.0
LY0020-1010	4-1			4.3		8.0		12.00		16.0
LY0020-1011	5-1			5.3		10.0		13.00		18.0
LY0020-1012	3-2.5			3.2		6.0		11.00		14.0
LY0020-1013	3.5-2.5			3.7		6.0		11.00		14.0
LY0020-1014	4-2.5			4.3		8.0		12.00		16.0
LY0020-1015	5-2.5			5.3		10.0		14.00		19.0
LY0020-1016	6-2.5			6.5		11.0		16.00		21.5
LY0020-1017	8-2.5			8.4		14.0		17.00		24.0
LY0020-1018	4-6			4.3		8.0		14.00		18.0
LY0020-1019	5-6			5.3		10.0		15.00		20.0
LY0020-1020	6-6			6.5		11.0		16.00		21.5
LY0020-1021	8-6			8.4		14.0		19.00		26.0
LY0020-1022	10-6			10.5		18.0		21.00		30.0
LY0020-1023	5-10			5.3		10.0		16.00		21.0
LY0020-1024	6-10			6.5		11.0		17.00		22.5
LY0020-1025	8-10			8.4		14.0		20.00		27.0
LY0020-1026	10-10			10.5		18.0		21.00		30.0
LY0020-1027	12-10			13.0		22.0		23.00		34.0
LY0020-1028	5-16			5.3		11.0		20.00		25.5
LY0020-1029	6-16			6.5		11.0		20.00		25.5
LY0020-1030	8-16			8.4		14.0		22.00		29.0
LY0020-1031	10-16			10.5		18.0		24.00		33.0
LY0020-1032	12-16			13.0		22.0		26.00		37.0
LY0020-1033	5-25			5.3		12.0		25.00		31.0
LY0020-1034	6-25			6.5		12.0		25.00		31.0
LY0020-1035	8-25			8.4		16.0		25.00		33.0
LY0020-1036	10-25			10.5		18.0		26.00		35.0
LY0020-1037	12-25			13.0		22.0		31.00		42.0
LY0020-1038	16-25			17.0		28.0		35.00		49.0
LY0020-1039	6-35			6.5		15.0		26.00		33.5
LY0020-1040	8-35			8.4		16.0		26.00		34.0
LY0020-1041	10-35			10.5		18.0		27.00		36.0
LY0020-1042	12-35			13.0		22.0		31.00		42.0
LY0020-1043	16-35			17.0		28.0		36.00		50.0
LY0020-1044	6-50			6.5		18.0		34.00		43.0
LY0020-1045	8-50			8.4		18.0		34.00		43.0
LY0020-1046	10-50			10.5		18.0		34.00		43.0
LY0020-1047	12-50			13.0		22.0		36.00		47.0
LY0020-1048	16-50			17.0		28.0		40.00		54.0
LY0020-1049	6-70			6.5		22.0		38.00		49.0
LY0020-1050	8-70			8.4		22.0		38.00		49.0
LY0020-1051	10-70			10.5		22.0		38.00		49.0
LY0020-1052	12-70			13.0		22.0		38.00		49.0
LY0020-1053	16-70			17.0		28.0		42.00		56.0
LY0020-1054	8-95			8.4		24.0		42.00		54.0
LY0020-1055	10-95			10.5		24.0		42.00		54.0
LY0020-1056	12-95			13.0		24.0		42.00		54.0
LY0020-1057	16-95			17.0		28.0		44.00		58.0
LY0020-1058	8-120			8.4		24.0		44.00		56.0
LY0020-1059	10-120			10.5		24.0		44.00		56.0
LY0020-1060	12-120			13.0		24.0		44.00		56.0
LY0020-1061	16-120			17.0		28.0		48.00		62.0
LY0020-1062	10-150			10.5		30.0		50.00		65.0
LY0020-1063	12-150			13.0		30.0		50.00		65.0
LY0020-1064	16-150			17.0		30.0		50.00		65.0
LY0020-1065	10-185			10.5		36.0		50.00		68.0
LY0020-1066	12-185			13.0		36.0		50.00		68.0
LY0020-1067	16-185			17.0		36.0		50.00		68.0
LY0020-1068	10-240			10.5		38.0		56.00		75.0
LY0020-1069	12-240			13.0		38.0		56.00		75.0
LY0020-1070	16-240			17.0		38.0		56.00		75.0


NON-INSULATED SPADE TERMINALS Y型裸端子 UL:E357535



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	WIRE RANGE		DIMENSIONS						
		AWG/MCM	mm ²	ΦE	ΦD	Φd	W	B	L	T
LY0020-2001	1.25-3YS			3.7	3.4	1.7	5.7	4.5	16	
LY0020-2002	1.25-3YW			3.7	3.4	1.7	6.2	4.5	16.0	
LY0020-2003	1.25-3YSA			3.2	3.4	1.7	5.7	4.5	16.0	
LY0020-2004	1.25-4YS	22-16	0.25-1.65	4.3	3.4	1.7	6.4	4.5	16.0	0.8
LY0020-2005	1.25-4YW			4.3	3.4	1.7	7.2	4.5	16.0	
LY0020-2006	1.25-5Y			5.3	3.4	1.7	8.0	4.5	16.0	
LY0020-2007	1.25-6Y			6.7	3.4	1.7	10.7	4.5	17.0	
LY0020-2008	2-3YSA	16-14	1.04-2.63	3.2	4.0	2.3	5.7	4.5	16.0	0.8
LY0020-2009	2-3YS			3.7	4.0	2.3	5.7	4.5	16.0	
LY0020-2010	2-3YW			3.7	4.0	2.3	6.2	4.5	16.0	
LY0020-2011	2-4YS			4.3	4.0	2.3	6.4	4.5	16.0	
LY0020-2012	2-4YW	12-10	2.63-4.60	4.3	4.0	2.3	7.2	4.5	16.0	0.8
LY0020-2013	2-5Y			5.3	4.0	2.3	8.0	4.5	16.0	
LY0020-2014	2-6Y			6.7	4.0	2.3	10.7	4.5	19.0	
LY0020-2015	3.5-4Y			4.3	5.0	3.2	8.0	6.3	18.0	
LY0020-2016	3.5-5Y	12-10	4.60-6.64	5.3	5.0	3.2	8.0	6.3	18.0	1.0
LY0020-2017	5.5-3Y			3.7	5.6	3.5	8.2	6.5	19.5	
LY0020-2018	5.5-4Y			4.3	5.6	3.5	8.2	6.5	19.5	
LY0020-2019	5.5-5Y			5.3	5.6	3.5	9.0	6.5	19.5	
LY0020-2020	5.5-6Y	8	6.64-10.52	6.4	5.6	3.5	12.0	6.5	24.0	1.15
LY0020-2021	8-5Y			5.3	7.0	4.5	9.0	8.6	23.5	
LY0020-2022	8-6Y			6.7	7.0	4.5	12.0	8.6	24.0	
LY0020-2023	14-5Y			5.3	8.5	5.9	12.0	10.0	27.5	
LY0020-2024	14-6Y	6	10.52-16.78	6.7	8.5	5.9	12.0	10.0	27.5	1.2
LY0020-2025	LY14-5Y			5.3	9.1	6.0	12.0	10.0	27.5	



INSULATED RING TERMINALS 圓型绝缘端子 UL:E357535



- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	WIRE RANGE		MENSIONS						
		AWG/MCM	mm ²	ΦE	ΦD	Φd	W	B	L	COLOR
LY0021-0001	VF1. 25-3	22-16	0.25-1.65	3.7	4.0	1.7	5.5	10.4	17.3	● RED
LY0021-0002	VF1. 25-3A			3.2	4.0	1.7	5.5	10.4	17.3	
LY0021-0003	VF1. 25-3M			3.7	4.0	1.7	6.6	10.4	20.3	
LY0021-0004	VF1. 25-4			4.3	4.0	1.7	8.0	10.4	21.8	
LY0021-0005	VF1. 25-4M	16-14	1.04-2.63	4.3	4.0	1.7	6.6	10.4	20.3	● BLUE
LY0021-0006	VF1. 25-5			5.3	4.0	1.7	8.0	10.4	21.8	
LY0021-0007	VF1. 25-6			6.4	4.0	1.7	11.6	10.4	27.5	
LY0021-0008	VF1. 25-8			8.4	4.0	1.7	11.6	10.4	27.5	
LY0021-0009	VF1. 25-10	12-10	2.63-4.60	10.5	4.0	1.7	13.6	10.4	31.8	● YELLOW
LY0021-0010	VF2-3			3.7	4.6	2.3	8.5	10.4	22.3	
LY0021-0011	VF2-3A			3.2	4.6	2.3	8.5	10.4	22.3	
LY0021-0012	VF2-3M			3.7	4.6	2.3	6.6	10.4	19.8	
LY0021-0013	VF2-4	12-10	4.60-6.64	4.3	4.6	2.3	8.5	10.4	22.3	● YELLOW
LY0021-0014	VF2-4M			4.3	4.6	2.3	6.6	10.4	19.8	
LY0021-0015	VF2-5			5.3	4.6	2.3	9.5	10.4	22.3	
LY0021-0016	VF2-6			6.4	4.6	2.3	12.0	10.4	27.3	
LY0021-0017	VF2-8	8	6.64-10.52	8.4	4.6	2.3	12.0	10.4	27.3	● RED
LY0021-0018	VF2-10			10.5	4.6	2.3	13.6	10.4	30.8	
LY0021-0019	VF3. 5-4			4.3	5.6	3.2	9.5	13.3	26.3	
LY0021-0020	VF3. 5-5			5.3	5.6	3.2	9.5	13.3	26.3	
LY0021-0021	VF3. 5-6	6	10.52-16.78	6.4	5.6	3.2	12.0	13.3	27.7	● BLUE
LY0021-0022	VF3. 5-8			8.4	5.6	3.2	12.0	13.3	27.7	
LY0021-0023	VF5. 5-3			3.7	6.6	3.5	9.5	13.5	26.5	
LY0021-0024	VF5. 5-4			4.3	6.6	3.5	9.5	13.5	26.5	
LY0021-0025	VF5. 5-5	12-10	4.60-6.64	5.3	6.6	3.5	9.5	13.5	26.5	● YELLOW
LY0021-0026	VF5. 5-6			6.4	6.6	3.5	12.0	13.5	32.5	
LY0021-0027	VF5. 5-6S			6.4	6.6	3.5	12.0	13.5	29.2	
LY0021-0028	VF5. 5-8			8.4	6.6	3.5	15.0	13.5	34.5	
LY0021-0029	VF5. 5-10	8	6.64-10.52	10.5	6.6	3.5	15.0	13.5	34.5	● RED
LY0021-0030	VF8-3			3.7	8.3	4.5	10.0	17.5	30.0	
LY0021-0031	VF8-4			4.3	8.3	4.5	10.0	17.5	30.0	
LY0021-0032	VF8-5			5.3	8.3	4.5	10.0	17.5	30.0	
LY0021-0033	VF8-6	6	10.52-16.78	6.4	8.3	4.5	11.0	17.5	31.5	● BLUE
LY0021-0034	VF8-8			8.4	8.3	4.5	14.0	17.5	36.0	
LY0021-0035	VF8-10			10.5	8.3	4.5	18.0	17.5	39.0	
LY0021-0036	VF14-5			5.3	9.7	5.9	11.0	23.0	37.5	
LY0021-0037	VF14-6	6	10.52-16.78	6.4	9.7	5.9	11.0	23.0	37.5	● BLUE
LY0021-0038	VF14-8			8.4	9.7	5.9	14.0	23.0	43.0	
LY0021-0039	VF14-10			10.5	9.7	5.9	18.0	23.0	45.0	
LY0021-0040	VF14-12			13.0	9.7	5.9	18.0	23.0	45.0	


INSULATED SPADE TERMINALS Y型绝缘端子 UL:E357535



- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	WIRE RANGE		MENSIONS						COLOR
		AWG/MCM	mm ²	ΦE	ΦD	Φd	W	B	L	
LY0021-1001	VF1.25-3YS			3.7	4.0	1.7	5.7	10.4	21.8	● RED
LY0021-1002	VF1.25-3YW			3.7	4.0	1.7	6.2	10.4	21.8	
LY0021-1003	VF1.25-3YSA			3.2	4.0	1.7	5.7	10.4	21.8	
LY0021-1004	VF1.25-4YS	22-16	0.25-1.65	4.3	4.0	1.7	6.4	10.4	21.8	
LY0021-1005	VF1.25-4YW			4.3	4.0	1.7	7.2	10.4	21.8	
LY0021-1006	VF1.25-5Y			5.3	4.0	1.7	8.0	10.4	21.8	
LY0021-1007	VF1.25-6Y			6.7	4.0	1.7	10.7	10.4	22.8	● BLUE
LY0021-1008	VF2-3YS			3.7	4.6	2.3	5.7	10.4	21.8	
LY0021-1009	VF2-3YSA			3.2	4.6	2.3	5.7	10.4	21.8	
LY0021-1010	VF2-3YW			3.7	4.6	2.3	6.2	10.4	21.8	
LY0021-1011	VF2-4YS	16-14	1.04-2.63	4.3	4.6	2.3	6.4	10.4	21.8	
LY0021-1012	VF2-4YW			4.3	4.6	2.3	7.2	10.4	21.8	
LY0021-1013	VF2-5Y			5.3	4.6	2.3	8.0	10.4	21.8	● YELLOW
LY0021-1014	VF2-6Y			6.7	4.6	2.3	10.7	10.4	24.8	
LY0021-1015	VF3.5-4Y	12-10	2.63-4.60	4.3	5.6	3.2	8.0	13.3	24.8	
LY0021-1016	VF3.5-5Y			5.3	5.6	3.2	8.0	13.3	24.8	
LY0021-1017	VF5.5-3Y			3.7	6.6	3.5	8.2	13.6	26.5	
LY0021-1018	VF5.5-4Y	12-10	4.60-6.64	4.3	6.6	3.5	8.2	13.6	26.5	
LY0021-1019	VF5.5-5Y			5.3	6.6	3.5	9.0	13.6	26.5	● RED
LY0021-1020	VF5.5-6Y			6.4	6.6	3.5	12.0	13.6	31.2	
LY0021-1021	VF8-5Y	8	6.64-10.52	5.3	8.3	4.5	9.0	17.5	32.0	
LY0021-1022	VF8-6Y			6.7	8.3	4.5	12.0	17.5	32.5	
LY0021-1023	VF14-5Y	6	10.52-16.78	5.3	9.7	5.9	12.0	23.0	40.5	● BLUE
LY0021-1024	VF14-6Y			6.7	9.7	5.9	12.0	23.0	40.5	


NYLON-INSULATED RING TERMINALS 尼龙圓型绝缘端子 UL:E357535



- ◎ Material
- ◎ Insulation: Nylon
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	WIRE RANGE		MENSIONS						COLOR
		AWG/MCM	mm ²	ΦE	ΦD	Φd	W	B	L	
LY0021-2001	NL1.25-3			3.7	4.3	1.7	5.5	11.3	18.2	● RED
LY0021-2002	NL1.25-3A			3.2	4.3	1.7	5.5	11.3	18.2	
LY0021-2003	NL1.25-3M			3.7	4.3	1.7	6.6	11.3	21.2	
LY0021-2004	NL1.25-4			4.3	4.3	1.7	8.0	11.3	22.7	
LY0021-2005	NL1.25-4M	22-16	0.25-1.65	4.3	4.3	1.7	6.6	11.3	21.2	
LY0021-2006	NL1.25-5			5.3	4.3	1.7	8.0	11.3	22.7	
LY0021-2007	NL1.25-6			6.4	4.3	1.7	11.6	11.3	28.4	● BLUE
LY0021-2008	NL1.25-8			8.4	4.3	1.7	11.6	11.3	28.4	
LY0021-2009	NL1.25-10			10.5	4.3	1.7	13.6	11.3	32.7	
LY0021-2010	NL2-3			3.7	4.6	2.3	8.5	11.3	23.2	
LY0021-2011	NL2-3A			3.2	4.6	2.3	8.5	11.3	23.2	
LY0021-2012	NL2-3M			3.7	4.6	2.3	6.6	11.3	20.7	● YELLOW
LY0021-2013	NL2-4			4.3	4.6	2.3	8.5	11.3	23.2	
LY0021-2014	NL2-4M	16-14	1.04-2.63	4.3	4.6	2.3	6.6	11.3	20.7	
LY0021-2015	NL2-5			5.3	4.6	2.3	9.5	11.3	23.2	
LY0021-2016	NL2-6			6.4	4.6	2.3	12.0	11.3	28.2	
LY0021-2017	NL2-8			8.4	4.6	2.3	12.0	11.3	28.2	
LY0021-2018	NL2-10			10.5	4.6	2.3	13.6	11.3	31.7	● RED
LY0021-2019	NL5.5-3			3.7	6.6	3.5	9.5	14.1	27.1	
LY0021-2020	NL5.5-4			4.3	6.6	3.5	9.5	14.1	27.1	
LY0021-2021	NL5.5-5			5.3	6.6	3.5	9.5	14.1	27.1	
LY0021-2022	NL5.5-6	12-10	4.60-6.64	6.4	6.6	3.5	12.0	14.1	33.1	
LY0021-2023	NL5.5-6S			6.4	6.6	3.5	12.0	14.1	29.8	
LY0021-2024	NL5.5-8			8.4	6.6	3.5	15.0	14.1	35.1	● BLUE
LY0021-2025	NL5.5-10			10.5	6.6	3.5	15.0	14.1	35.1	
LY0021-2026	NL8-3			3.7	8.0	4.5	10.0	16.0	29.0	
LY0021-2027	NL8-4			4.3	8.0	4.5	10.0	16.0	29.0	
LY0021-2028	NL8-5			5.3	8.0	4.5	10.0	16.0	29.0	
LY0021-2029	NL8-6	8	6.64-10.52	6.4	8.0	4.5	11.0	16.0	30.5	● RED
LY0021-2030	NL8-8			8.4	8.0	4.5	14.0	16.0	35.5	
LY0021-2031	NL8-10			10.5	8.0	4.5	18.0	16.0	38.0	
LY0021-2032	NL8-12			13.0	8.0	4.5	18.0	16.0	38.0	


NYLON-INSULATED SPADE TERMINALS 尼龙Y型绝缘端子 UL: E357535



- ◎ Material
- ◎ Insulation: Nylon
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	WIRE RANGE		MENSIONS						COLOR
		AWG/MCM	mm ²	ΦE	ΦD	Φd	W	B	L	
LY0021-3001	NL1.25-3YS			3.7	4.3	1.7	5.7	11.3	22.7	
LY0021-3002	NL1.25-3YSA			3.2	4.3	1.7	5.7	11.3	22.7	
LY0021-3003	NL1.25-3YW			3.7	4.3	1.7	6.2	11.3	22.7	
LY0021-3004	NL1.25-4YS	22-16	0.25-1.65	4.3	4.3	1.7	6.4	11.3	22.7	● RED
LY0021-3005	NL1.25-4YW			4.3	4.3	1.7	7.2	11.3	22.7	
LY0021-3006	NL1.25-5Y			5.3	4.3	1.7	8.0	11.3	22.7	
LY0021-3007	NL1.25-6Y			6.7	4.3	1.7	10.7	11.3	23.7	
LY0021-3008	NL2-3YS			3.7	4.6	2.3	5.7	11.3	22.7	
LY0021-3009	NL2-3YSA			3.2	4.6	2.3	5.7	11.3	22.7	
LY0021-3010	NL2-3YW			3.7	4.6	2.3	6.2	11.3	22.7	
LY0021-3011	NL2-4YS	16-14	1.04-2.63	4.3	4.6	2.3	6.4	11.3	22.7	● BLUE
LY0021-3012	NL2-4YW			4.3	4.6	2.3	7.2	11.3	22.7	
LY0021-3013	NL2-5Y			5.3	4.6	2.3	8.0	11.3	22.7	
LY0021-3014	NL2-6Y			6.7	4.6	2.3	10.7	11.3	25.7	
LY0021-3015	NL5.5-3Y			3.7	6.6	3.5	8.2	14.1	27.1	
LY0021-3016	NL5.5-4Y	12-10	4.60-6.64	4.3	6.6	3.5	8.2	14.1	27.1	● YELLOW
LY0021-3017	NL5.5-5Y			5.3	6.6	3.5	9.0	14.1	27.1	
LY0021-3018	NL5.5-6Y			6.4	6.6	3.5	12.0	14.1	31.8	
LY0021-3019	NL8-5Y	8	6.64-10.52	5.3	8.0	4.5	9.0	16.0	30.9	● RED
LY0021-3020	NL8-6Y			6.7	8.0	4.5	12.0	16.0	31.4	


INSULATED MALE CONNECTORS 插梢公端子 UL: E479505



- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Brass
- ◎ Plating: Tin

PART NO	ITEM NO	DIMENSIONS					
		W	L	t	Φd	ΦD	B
LY0022-0001	RM110-5	2.8	18.5	0.5	1.8	3.6	10.0
LY0022-0002	RM110-8	2.8	18.5	0.8	1.8	3.6	10.0
LY0022-0003	RM187-5	4.5	19.0	0.5	1.8	3.6	10.0
LY0022-0004	RM187-8	4.5	19.0	0.8	1.8	3.6	10.0
LY0022-0005	RM250	6.3	21.1	0.8	1.8	3.8	10.0
LY0022-0006	BM110-5	2.8	18.5	0.5	2.4	4.2	10.0
LY0022-0007	BM110-8	2.8	18.5	0.8	2.4	4.2	10.0
LY0022-0008	BM187-5	4.5	19.0	0.5	2.4	4.2	10.0
LY0022-0009	BM187-8	4.5	19.0	0.8	2.4	4.2	10.0
LY0022-0010	BM250	6.3	21.1	0.8	2.3	4.2	10.0
LY0022-0011	YM110-5	2.8	22.0	0.5	3.8	5.4	13.0
LY0022-0012	YM110-8	2.8	22.0	0.8	3.5	5.4	13.0
LY0022-0013	YM187-5	4.5	22.0	0.5	3.5	5.4	13.0
LY0022-0014	YM187-8	4.5	22.0	0.8	3.5	5.4	13.0
LY0022-0015	YM250	6.3	24.0	0.8	3.5	5.4	13.0


INSULATED FEMALE CONNECTORS 插鞘母端子 UL: E479505

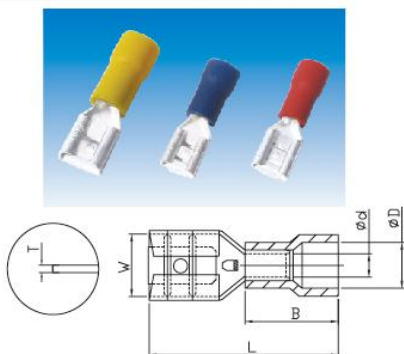

- ◎Material
- ◎Insulation:Vinyl
- ◎Terminal Body: Brass
- ◎Plating:Tin

PART NO	ITEM NO	DIMENSIONS					
		W	L	t	φ d	φ D	B
LY0023-0001	RF110-5	3.2	18.5	0.3	1.8	3.6	10.0
LY0023-0002	RF110-8	3.2	18.5	0.3	1.8	3.6	10.0
LY0023-0003	RF187-5	5.0	19.0	0.4	1.8	3.6	10.0
LY0023-0004	RF187-8	5.0	19.0	0.4	1.8	3.6	10.0
LY0023-0005	RF250	6.6	20.3	0.4	1.8	3.8	10.0
LY0023-0006	BF110-5	3.2	18.5	0.3	2.4	4.2	10.0
LY0023-0007	BF110-8	3.2	18.5	0.3	2.4	4.2	10.0
LY0023-0008	BF187-5	5.0	19.0	0.4	2.4	4.2	10.0
LY0023-0009	BF187-8	5.0	19.0	0.4	2.4	4.2	10.0
LY0023-0010	BF250	6.6	20.3	0.4	2.4	4.2	10.0
LY0023-0011	YF110-5	3.2	22.0	0.4	3.5	5.4	13.0
LY0023-0012	YF110-8	3.2	22.0	0.4	3.5	5.4	13.0
LY0023-0013	YF187-5	5.0	22.0	0.4	3.5	5.4	13.0
LY0023-0014	YF187-8	5.0	22.0	0.4	3.5	5.4	13.0
LY0023-0015	YF250	6.6	23.3	0.4	3.5	5.4	13.0


FULLY INSULATED FEMALE CONNECTORS 全绝缘插鞘母端子 UL: E479505

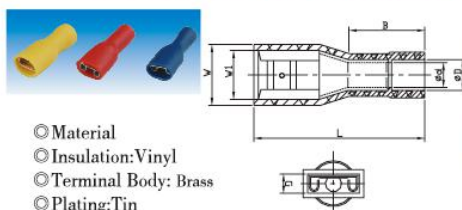

- ◎Material
- ◎Insulation:Vinyl
- ◎Terminal Body: Brass
- ◎Plating:Tin

PART NO	ITEM NO	DIMENSIONS							WIRE RANGE		
		W1	W	L	φ d	φ D	G	B	Twine mm²	AWG	COLOR
LY0023-1001	RF250F	6.6	9.6	23.0	1.8	3.9	4.8	10	0.75 ~ 1.25	18 ~ 16	RED
LY0023-1002	BF250F	6.6	9.6	23.0	2.3	4.2	4.8	10	1.25 ~ 2.0	16 ~ 14	BLUE
LY0023-1003	YF250F	6.6	9.6	24.0	3.5	5.5	4.8	11	2.63 ~ 6.64	12 ~ 10	YELLOW


NYLON FULLY INSULATED MALE CONNECTORS 尼龙全绝缘插鞘公端子 UL: E479505

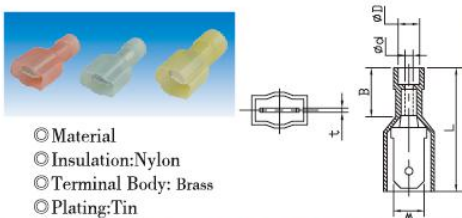

- ◎Material
- ◎Insulation:Nylon
- ◎Terminal Body: Brass
- ◎Plating:Tin

PART NO	ITEM NO	DIMENSIONS							WIRE RANGE		
		W	L	t	φ d	φ D	B		Twine mm²	AWG	COLOR
LY0024-0001	RM250FLP	6.3	23.0	0.8	1.8	3.9	10.0		0.75 ~ 1.25	18 ~ 16	RED
LY0024-0002	BM250FLP	6.3	23.0	0.8	2.3	4.5	10.0		1.25 ~ 2.0	16 ~ 14	BLUE
LY0024-0003	YM250FLP	6.3	26.5	0.8	3.5	7.0	13.5		2.63 ~ 6.64	12 ~ 10	YELLOW

NYLON FULLY INSULATED FEMALE CONNECTORS 尼龙全绝缘插鞘母端子 UL: E479505

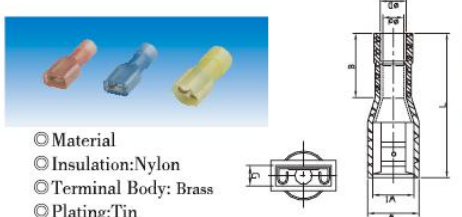

- ◎Material
- ◎Insulation:Nylon
- ◎Terminal Body: Brass
- ◎Plating:Tin

PART NO	ITEM NO	DIMENSIONS							WIRE RANGE		
		W1	W	L	φ d	φ D	G	B	Twine mm²	AWG	COLOR
LY0025-0001	RF250FLP	6.8	9.6	21.5	1.8	4.5	3.8	10	0.75 ~ 1.25	18 ~ 16	RED
LY0025-0002	BF250FLP	6.8	9.6	21.5	2.3	5.0	3.8	10	1.25 ~ 2.0	16 ~ 14	BLUE
LY0025-0003	YF250FLP	6.8	9.6	24.0	3.5	7.0	6.4	11	2.63 ~ 6.64	12 ~ 10	YELLOW

INSULATED PIGGY BACK CONNECTORS 钩型公母插 UL: E479505




- ◎Material
- ◎Insulation:Vinyl
- ◎Terminal Body: Brass
- ◎Plating:Tin

PART NO	ITEM NO	DIMENSIONS							WIRE RANGE		
		W	W1	L	φ d	φ D	B	t	Twine mm²	AWG	COLOR
LY0026-0001	MF1.25F	6.8	6.3	22.5	1.8	3.9	10.0	0.8	0.25 ~ 1.65	22 ~ 16	RED
LY0026-0002	MF2F	6.8	6.3	22.5	2.3	4.2	10.0	0.8	1.04 ~ 2.63	16 ~ 14	BLUE
LY0026-0003	MF5.5F	6.8	6.3	24.0	3.5	5.5	13.5	0.8	2.63 ~ 6.64	12 ~ 10	YELLOW

NON-INSULATED PIN TERMINALS 针型裸端子 UL:E357535




- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin



PART NO	ITEM NO	DIMENSIONS					
		F	φD	φd	B	L	T
LY0027-0001	TPIN1.25	2.0	3.4	1.7	4.5	16.3	0.75
LY0027-0002	TPIN2	2.0	4.0	2.3	4.8	17.0	0.75
LY0027-0003	TPIN5.5	2.7	5.6	3.5	6.8	20.5	1.0

NON INSULATED PIN TERMINALS 针型裸端子 UL:E357535



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin




PART NO	ITEM NO	DIMENSIONS					
		W	D	d	T	B	L
LY0027-1001	TPIN1.25F-10/2.3	2.3	3.4	1.7	0.8	4.5	14.5
LY0027-1002	TPIN1.25F-10/3.0	3.0	3.4	1.7	0.8	4.5	14.5
LY0027-1003	TPIN1.25F-13/2.3	2.3	3.4	1.7	0.8	4.5	17.5
LY0027-1004	TPIN1.25F-13/3.0	3.0	3.4	1.7	0.8	4.5	17.5
LY0027-1005	TPIN1.25F-14.5/2.3	2.3	3.4	1.7	0.8	4.5	19.0
LY0027-1006	TPIN1.25F-14.5/3.0	3.0	3.4	1.7	0.8	4.5	19.0
LY0027-1007	TPIN1.25F-18/2.3	2.3	3.4	1.7	0.8	4.5	22.5
LY0027-1008	TPIN1.25F-18/3.0	3.0	3.4	1.7	0.8	4.5	22.5
LY0027-1009	TPIN2F-8/2.3	2.3	4.0	2.3	0.8	4.8	12.8
LY0027-1010	TPIN2F-8/3.0	3.0	4.0	2.3	0.8	4.8	12.8
LY0027-1011	TPIN2F-10/2.3	2.3	4.0	2.3	0.8	4.8	14.8
LY0027-1012	TPIN2F-10/3.0	3.0	4.0	2.3	0.8	4.8	14.8
LY0027-1013	TPIN2F-13/2.3	2.3	4.0	2.3	0.8	4.8	17.8
LY0027-1014	TPIN2F-13/3.0	3.0	4.0	2.3	0.8	4.8	17.8
LY0027-1015	TPIN2F-14/2.3	2.3	4.0	2.3	0.8	4.8	18.8
LY0027-1016	TPIN2F-14/3.0	3.0	4.0	2.3	0.8	4.8	18.8
LY0027-1017	TPIN2F-18/2.3	2.3	4.0	2.3	0.8	4.8	22.8
LY0027-1018	TPIN2F-18/3.0	3.0	4.0	2.3	0.8	4.8	22.8
LY0027-1019	TPIN5.5F-10/2.3	2.3	5.6	3.5	1.0	6.8	16.8
LY0027-1020	TPIN5.5F-10/3.0	3.0	5.6	3.5	1.0	6.8	16.8
LY0027-1021	TPIN5.5F-14/2.3	2.3	5.6	3.5	1.0	6.8	20.8
LY0027-1022	TPIN5.5F-14/3.0	3.0	5.6	3.5	1.0	6.8	20.8
LY0027-1023	TPIN5.5F-18/2.3	2.3	5.6	3.5	1.0	6.8	24.8
LY0027-1024	TPIN5.5F-18/3.0	3.0	5.6	3.5	1.0	6.8	24.8

NON- INSULATED KS TERMINALS KS裸端子 UL:E357535



- ◎ Material
- ◎ Terminal Body: Copper
- ◎ Plating: Tin




PART NO	ITEM NO	DIMENSIONS						
		L	B	W	d	D	H	T
LY0028-0001	KS10-12	22.0	8.0	4.3	4.5	6.9	2.4	1.1
LY0028-0002	KS16-13	26.0	10.0	5.5	5.9	8.4	2.6	1.2
LY0028-0003	KS25-15	33.5	13.5	6.8	7.0	9.5	2.6	1.2
LY0028-0005	KS35-20	40.5	16.0	8.0	8.7	11.8	3.2	1.5
LY0028-0006	KS50-20	45.0	19.0	9.5	9.8	13.6	3.8	1.8
LY0028-0007	KS70-25	55.0	24.0	11.0	11.6	15.8	4.2	2.0
LY0028-0008	KS95-25	55.0	24.0	12.5	13.7	18.9	5.2	2.5
LY0028-0009	KS120-34	62.0	26.0	14.3	15.1	21.3	6.2	3.0
LY0028-0010	KS150-37	63.0	27.5	16.8	16.5	23.0	6.6	3.2
LY0028-0011	KS185-38	70.5	35.0	19.0	19.0	26.0	7.2	3.45
LY0028-0012	KS240-44	82.5	40.5	21.5	21.2	29.2	8.0	3.95

INSULATED KS TERMINALS KS绝缘端子 UL:E357535



- ◎ Material
- ◎ Insulation: Nylon
- ◎ Terminal Body: Copper
- ◎ Plating: Tin




PART NO	ITEM NO	DIMENSIONS						
		D	d	B	L	W	H	T
LY0028-1001	KS10-12NL	9.0	4.5	15.5	29.5	4.3	2.4	1.1
LY0028-1002	KS16-13NL	10.5	5.9	19.0	35.0	5.5	2.6	1.2
LY0028-1003	KS25-15NL	11.5	7.0	24.5	44.5	6.8	2.6	1.2
LY0028-1004	KS35-20NL	14.0	8.7	29.5	54.0	8.0	3.2	1.5
LY0028-1005	KS50-20NL	15.8	9.8	35.0	61.0	9.5	3.8	1.8
LY0028-1006	KS70-25NL	18.0	11.6	44.0	75.0	11.0	4.2	2.0
LY0028-1007	KS95-25NL	21.6	13.7	44.0	75.0	12.5	5.2	2.5

INSULATED PIN TERMINALS 针型端子 UL:E357535



- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Copper
- ◎ Plating: Tin




PART NO	ITEM NO	DIMENSIONS			WIRE RANGE			
		F	L	B	Single mm	Twine mm ²	AWG	COLOR
LY0029-0001	PIN1.25	2.0	22.5	10.4	0.57-1.44	0.25-1.65	22-16	● RED
LY0029-0002	PIN2	2.0	22.9	10.4	1.44-1.82	1.04-2.63	16-14	● BLUE
LY0029-0003	PIN5.5	2.7	27.3	13.5	1.82-2.98	2.63-6.64	12-10	● YELLOW

INSULATED PIN TERMINALS 针型端子 UL:E357535




- ◎ Material
- ◎ Insulation: Vinyl
- ◎ Terminal Body: Copper
- ◎ Plating: Tin



PART NO	ITEM NO	DIMENSIONS						WIRE RANGE			
		W	D	d	T	B	L	Single mm	Twine mm ²	AWG	COLOR
LY0029-1001	PIN1.25F-10/2.3	2.3	4.0	1.7	0.8	10.4	20.4	0.57-1.44	0.25-1.65	22-16	● RED
LY0029-1002	PIN1.25F-10/3.0	3.0	4.0	1.7	0.8	10.4	20.4				
LY0029-1003	PIN1.25F-13/2.3	2.3	4.0	1.7	0.8	10.4	23.4				
LY0029-1004	PIN1.25F-13/3.0	3.0	4.0	1.7	0.8	10.4	23.4				
LY0029-1005	PIN1.25F-14.5/2.3	2.3	4.0	1.7	0.8	10.4	24.9				
LY0029-1006	PIN1.25F-14.5/3.0	3.0	4.0	1.7	0.8	10.4	24.9	1.44-1.82	1.04-2.63	16-14	● BLUE
LY0029-1007	PIN1.25F-18/2.3	2.3	4.0	1.7	0.8	10.4	28.4				
LY0029-1008	PIN1.25F-18/3.0	3.0	4.0	1.7	0.8	10.4	28.4				
LY0029-1009	PIN2F-8/2.3	2.3	4.6	2.3	0.8	10.4	18.4				
LY0029-1010	PIN2F-8/3.0	3.0	4.6	2.3	0.8	10.4	18.4				
LY0029-1011	PIN2F-10/2.3	2.3	4.6	2.3	0.8	10.4	20.4	1.82-2.98	2.63-6.64	12-10	● YELLOW
LY0029-1012	PIN2F-10/3.0	3.0	4.6	2.3	0.8	10.4	20.4				
LY0029-1013	PIN2F-13/2.3	2.3	4.6	2.3	0.8	10.4	23.4				
LY0029-1014	PIN2F-13/3.0	3.0	4.6	2.3	0.8	10.4	23.4				
LY0029-1015	PIN2F-14/2.3	2.3	4.6	2.3	0.8	10.4	24.4				
LY0029-1016	PIN2F-14/3.0	3.0	4.6	2.3	0.8	10.4	24.4	1.82-2.98	2.63-6.64	12-10	● YELLOW
LY0029-1017	PIN2F-18/2.3	2.3	4.6	2.3	0.8	10.4	28.4				
LY0029-1018	PIN2F-18/3.0	3.0	4.6	2.3	0.8	10.4	28.4				
LY0029-1019	PIN5.5F-10/2.3	2.3	6.6	3.5	1.0	13.5	23.5				
LY0029-1020	PIN5.5F-10/3.0	3.0	6.6	3.5	1.0	13.5	23.5				
LY0029-1021	PIN5.5F-14/2.3	2.3	6.6	3.5	1.0	13.5	27.5	1.82-2.98	2.63-6.64	12-10	● YELLOW
LY0029-1022	PIN5.5F-14/3.0	3.0	6.6	3.5	1.0	13.5	27.5				
LY0029-1023	PIN5.5F-18/2.3	2.3	6.6	3.5	1.0	13.5	31.5				
LY0029-1024	PIN5.5F-18/3.0	3.0	6.6	3.5	1.0	13.5	31.5				


CORD-END TWIN TERMINALS 双线套 欧式端子 UL:E357535



- ◎ Material
- ◎ Insulation: Nylon
- ◎ Terminal Body: Copper
- ◎ Plating: Tin

PART NO	ITEM NO	Wire Range	DIMENSIONS(mm)										COLOR SYSTEM				
			D1	Tolerance	D2	Tolerance	L	Tolerance	L1	Tolerance	S1	S2	DIN	W	T		
LY0030-0001	CT205008	2 × 0.50	1.50	± 0.14	2.5/4.7	+/-0.2	15.0	± 1.5	8.0	± 0.5	0.25	0.25	WHITE	ORANGE	WHITE		
LY0030-0002	CT207508	2 × 0.75	1.80	± 0.14	2.8/5.0	+/-0.2	15.0	± 1.5	8.0	± 0.5			0.25	0.25	GRAY	WHITE	BLUE
LY0030-0003	CT207510						17.0		10.0						GRAY	WHITE	BLUE
LY0030-0004	CT210008	2 × 1.00	2.05	± 0.14	3.4/5.4	+/-0.2	15.0	± 1.5	8.0	± 0.5	0.15	0.15	RED	YELLOW	RED		
LY0030-0005	CT210010						17.0		10.0				RED	YELLOW	RED		
LY0030-0006	CT215008	2 × 1.50	2.30	± 0.25	3.6/6.6	+/-0.2	16.0	± 1.5	8.0	± 0.5			0.3	0.3	BLACK	RED	BLACK
LY0030-0007	CT215012						20.0		12.0		BLACK	RED			BLACK		
LY0030-0008	CT225010	2 × 2.50	2.80	± 0.25	4.2/7.8	+/-0.2	18.5	± 1.5	10.0	± 0.8	0.4	0.4			BLUE	BLUE	GRAY
LY0030-0009	CT225013						21.5		13.0				BLUE	BLUE	GRAY		
LY0030-0010	CT240012	2 × 4.00	3.70	± 0.25	4.9/8.8	+/-0.4	23.0	± 1.5	12.0	± 0.8			0.20	0.20	GRAY	GRAY	ORANGE
LY0030-0011	CT260014	2 × 6.00	4.80	± 0.3	6.9/10.0	+/-0.4	26.0	± 1.5	14.0	± 0.8	YELLOW	BLACK			YELLOW	BLACK	ORANGE
LY0030-0012	CT2100014	2 × 10.00	6.40	± 0.3	7.6/12.8	+/-0.4	26.5	± 1.5	14.0	± 0.8	RED	IVORY			BROWN	BROWN	IVORY
LY0030-0013	CT2160014	2 × 16.00	8.30	± 0.3	9.6/18.6	+/-0.4	31.5	± 1.5	14.0	± 0.8	0.30	0.30	BLUE	GREEN	IVORY		



CORD-END TERMINALS 歐式端子 UL:E357535



- ◎Material
- ◎Insulation:Nylon
- ◎Terminal Body: Copper
- ◎Plating:Tin

PART NO	ITEM NO	Wire Range	DIMENSIONS(mm)												COLOR SYSTEM		
			D1	Tolerance	D2	Tolerance	L	Tolerance	L1	Tolerance	S1	Tolerance	S2	Tolerance	W	T	DIN
LY0031-0001	LT01406	0.14	0.70	± 0.14	1.90	± 0.2	10	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	GRAY	GRAY	
LY0031-0002	LT01408						12		8								
LY0031-0003	LT02506	0.25	0.75	± 0.14	1.90	± 0.2	10	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	LIGHT BLUE	VIOLET	
LY0031-0004	LT02508						12		8								
LY0031-0005	LT03406	0.34	0.80	± 0.14	1.90	± 0.2	10	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	TURQUOISE	PINK	
LY0031-0006	LT03408						12		8								
LY0031-0007	LT05006	0.50	1.00	± 0.14	2.60	± 0.2	12	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	ORANGE	WHITE	WHITE
LY0031-0008	LT05008						14		8								
LY0031-0009	LT05010						16		10								
LY0031-0010	LT07506	0.75	1.20	± 0.14	2.80	± 0.2	12	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	WHITE	BLUE	GRAY
LY0031-0011	LT07508						14		8								
LY0031-0012	LT07510						16		10								
LY0031-0013	LT07512						18		12								
LY0031-0014	LT10006	1.00	1.40	± 0.14	3.00	± 0.2	12	± 1.5	6	± 0.5	0.15	± 0.05	0.30	± 0.1	YELLOW	RED	RED
LY0031-0015	LT10008						14		8								
LY0031-0016	LT10010						16		10								
LY0031-0017	LT10012						18		12								
LY0031-0018	LT15008	1.50	1.70	± 0.25	3.50	± 0.2	14	± 1.5	8	± 0.5	0.15	± 0.05	0.30	± 0.1	RED	BLACK	BLACK
LY0031-0019	LT15010						16		10								
LY0031-0020	LT15012						18		12								
LY0031-0021	LT15018						24		18								
LY0031-0022	LT25008	2.50	2.20	± 0.25	4.20	± 0.2	14	± 1.5	8	± 0.5	0.15	± 0.05	0.30	± 0.1	BLUE	GRAY	BLUE
LY0031-0023	LT25010						16		10								
LY0031-0024	LT25012						18		12								
LY0031-0025	LT25018						24		18								
LY0031-0026	LT40010	4.00	2.80	± 0.25	4.80	± 0.4	18	± 1.5	10	± 0.5	0.20	± 0.05	0.35	± 0.1	GRAY	ORANGE	GRAY
LY0031-0027	LT40012						20		12								
LY0031-0028	LT40018						26		18								
LY0031-0029	LT60012	6.00	3.50	± 0.3	6.30	± 0.4	20	± 1.5	12	± 0.8	0.20	± 0.05	0.40	± 0.15	BLACK	GREEN	YELLOW
LY0031-0030	LT60018						26		18								
LY0031-0031	LT100012	10.00	4.50	± 0.3	7.60	± 0.4	22	± 2	12	± 0.8	0.20	± 0.05	0.40	± 0.15	IVORY	BROWN	RED
LY0031-0032	LT100018						28		18								
LY0031-0033	LT160012	16.00	5.80	± 0.3	8.80	± 0.4	24	± 2	12	± 0.8	0.20	± 0.05	0.40	± 0.15	GREEN	IVORY	BLUE
LY0031-0034	LT160018						28		18								
LY0031-0035	LT250016	25.00	7.30	± 0.4	11.20	± 0.5	30	± 2	16	± 0.8	0.20	± 0.05	0.40	± 0.15	BROWN	BLACK	YELLOW
LY0031-0036	LT250018						32		18								
LY0031-0037	LT250022						36		22								
LY0031-0038	LT350016	35.00	8.30	± 0.4	12.70	± 0.5	30	± 2	16	± 0.8	0.20	± 0.05	0.40	± 0.15	BEIGE	RED	RED
LY0031-0039	LT350018						32		18								
LY0031-0040	LT350025						39		25								
LY0031-0041	LT500020	50.00	10.30	± 0.4	15.00	± 1	36	± 2	20	± 0.8	0.30	± 0.05	0.50	± 0.15	OLIVE	BLUE	BLUE
LY0031-0042	LT500025						40		25								
LY0031-0043	LT700021	70.00	13.50	± 0.6	16.00	± 1	37	± 2	21	± 0.8	0.40	± 0.05	0.60	± 0.15			YELLOW
LY0031-0044	LT950025	95.00	14.70	± 0.6	18.00	± 1	44	± 2	25	± 0.8	0.40	± 0.05	0.60	± 0.15			RED
LY0031-0045	LT120027	120.00	16.70	± 0.6	20.00	± 1	48	± 2	27	± 0.8	0.45	± 0.05	0.70	± 0.15			BLUE
LY0031-0046	LT150032	150.00	19.50	± 0.6	23.00	± 1	58	± 2	32	± 0.8	0.50	± 0.05	1.00	± 0.15			YELLOW


NON---INSULATED CORD-END TERMINALS 歐式裸端子 UL:E357535



- ◎Material
- ◎Terminal Body: Copper
- ◎Plating: Tin

PART NO	ITEM NO	Wire Range	DIMENSIONS(mm)					
			L	Tolerance	d1	Tolerance	D1	D2
LY0032-0001	LN05006	0.50	6	± 1.5	1.0	± 0.14	1.3	1.7
LY0032-0002	LN05008		8					
LY0032-0003	LN05010		10					
LY0032-0004	LN07506	0.75	6	± 1.5	1.2	± 0.14	1.5	1.9
LY0032-0005	LN07508		8					
LY0032-0006	LN07510		10					
LY0032-0007	LN10006	1.00	6	± 1.5	1.4	± 0.14	1.7	2.2
LY0032-0008	LN10008		8					
LY0032-0009	LN10010		10					
LY0032-0010	LN10012		12					
LY0032-0011	LN15007	1.50	7	± 1.5	1.7	± 0.25	2.0	2.5
LY0032-0012	LN15008		8					
LY0032-0013	LN15010		10					
LY0032-0014	LN15012		12					
LY0032-0015	LN25007	2.50	7	± 1.5	2.2	± 0.25	2.5	3.3
LY0032-0016	LN25008		8					
LY0032-0017	LN25010		10					
LY0032-0018	LN25012		12					
LY0032-0019	LN40008	4.00	8	± 1.5	2.8	± 0.25	3.2	3.9
LY0032-0020	LN40009		9					
LY0032-0021	LN40010		10					
LY0032-0022	LN40012		12					
LY0032-0023	LN40015		15	± 2				
LY0032-0024	LN40018		18					
LY0032-0025	LN60010		6.00	10				
LY0032-0026	LN60012	12						
LY0032-0027	LN60015	15		± 2				
LY0032-0028	LN60018	18						
LY0032-0029	LN100012	10.00	12	± 2	4.5	± 0.3	4.9	5.8
LY0032-0030	LN100015		15					
LY0032-0031	LN100018		18					
LY0032-0032	LN160012	16.00	12	± 2	5.8	± 0.3	6.2	7.2
LY0032-0033	LN160015		15					
LY0032-0034	LN160018		18					
LY0032-0035	LN250015	25.00	15	± 2	7.3	± 0.4	7.7	9.1
LY0032-0036	LN250016		16					
LY0032-0037	LN250018		18					
LY0032-0038	LN250022		22					
LY0032-0039	LN350016	35.00	16	± 2	8.3	± 0.4	8.7	10.2
LY0032-0040	LN350018		18					
LY0032-0041	LN350020		20					
LY0032-0042	LN350025		25					
LY0032-0043	LN500018	50.00	18	± 2	10.3	± 0.4	10.9	12.7
LY0032-0044	LN500020		20					
LY0032-0045	LN500025		25					

QUICK SPLIC CONNECTORS 接线夹 UL:E357535

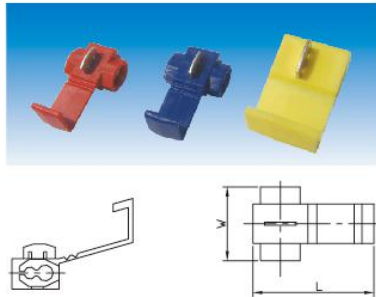

PART NO	ITEM NO	DIMENSIONS		WIRE RANGE		
		W	L	Twine mm ²	AWG	COLOR
LY0033-0001	3MR	20	32.0	0.25 ~ 1.65	22 ~ 16	RED
LY0033-0002	3MB	20	32.0	1.04 ~ 2.63	16 ~ 14	BLUE
LY0033-0003	3MY	21	32.0	2.63 ~ 6.64	12 ~ 10	YELLOW

CLOSE-END CONNECTORS 闭端端子 UL:E357535




PART NO	ITEM NO	L mm	D mm	d mm	Suitable Wires		Approved		Crimping Tools
					MIN	AWG	UL	CSA	
LY0034-0001	SD1.25	18.0	6.2	2.6	Max. 2#20 w/1#18 Min. 2#22	22 ~ 18	UL	CSA*	AK-25 MR30A
LY0034-0002	SD2	19.7	7.9	3.0	Max. 1#18 w/1#14 Min. 2#22	22 ~ 14	UL	CSA*	
LY0034-0003	SD5.5	25.5	10.5	4.0	Max. 3#18 w/1#12 Min. 2#22 w/2#18	22 ~ 10	UL	CSA*	
LY0034-0004	SD8	27.7	12.4	5.3	Max. 2#16 w/1#10 Min. 2#16 w/1#12	16 ~ 10	UL	CSA*	

SCREW-ON CONNECTORS 螺式接线端子 UL:E357535



PART NO	ITEM NO	A mm	B mm	C mm	COLOR	最大耐压
LY0034-1001	SP1 (E1)	8.60	14.80	4.10	GREY	300
LY0034-1002	SP2 (E2)	9.46	17.70	4.60	BLUE	300
LY0034-1003	SP3 (E3)	11.00	21.00	9.40	ORANGE	600
LY0034-1004	SP4 (E4)	14.00	23.60	8.87	YELLOW	600
LY0034-1005	SP5 (E5)	17.00	25.50	8.96	RED	600

VINYL WIRE END CAPS 绝缘体软管 UL:E357535

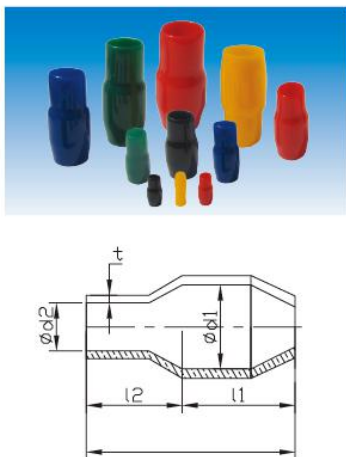

PART NO	ITEM NO	APPLICABLE WIRES	D1	D2	L1 ± 1	L2 ± 1	L ± 2	t ± 0.2
LY0035-0001	V-1.25	1.25mm ²	3.3	3.1	7.0	8	15.0	0.6
LY0035-0002	V-2.0	2.0mm ²	4.5	3.7	8.0	8	16.0	0.7
LY0035-0003	V-3.5	3.5mm ²	5.7	4.1	9.0	9	18.0	0.8
LY0035-0004	V-5.5	5.5mm ²	5.7	5.2	10.0	10	20.0	0.8
LY0035-0005	V-8.0	8.0mm ²	7.2	6.2	11.0	10	21.0	1.0
LY0035-0006	V-14	14mm ²	10.0	8.0	15.0	13	28.0	1.1
LY0035-0007	V-22	22mm ²	12.0	9.5	15.0	14	29.0	1.2
LY0035-0008	V-38	38mm ²	14.0	11.8	17.0	17	34.0	1.4
LY0035-0009	V-60	60mm ²	17.0	13.9	22.0	20	42.0	1.5
LY0035-0010	V-80	80mm ²	19.5	16.0	25.0	21	46.0	1.5
LY0035-0011	V-100	100mm ²	22.0	18.0	31.0	24	55.0	1.7
LY0035-0012	V-125	125mm ²	24.4	20.0	32.0	28	60.0	1.8
LY0035-0013	V-150	150mm ²	24.4	22.0	34.0	31	65.0	1.8
LY0035-0014	V-200	200mm ²	32.2	24.0	38.0	31	69.0	2
LY0035-0015	V-250	250mm ²	37.5	26.5	42.0	33	75.0	2
LY0035-0016	V-325	325mm ²	37.5	30.0	42.0	33	75.0	2
LY0035-0017	V-400	400mm ²	45.1	37.5	43.0	40	83.0	2
LY0035-0018	V-500	500mm ²	48.2	40.2	43.0	42	85.0	2
LY0035-0019	V-630	630mm ²	53.8	45.2	48.0	45	93.0	2

TERMINAL CRIMPING TOOLS 压著工具



PART NO	ITEM NO	Terminals Sizes area		KINDSOF TERMINAL
		AWG /MCM	DINmm ²	
LY0036-0001	HT301E(YAC-5)	22,20,18,16,14,12	0.5,0.75,1.0,1.5,2.5,4.0	Pin terminal insulated or non-insulated ferrules
LY0036-0002	HT301H(YYT-1)	22-18 16-14 12-10	0.5-1.0 1.5-2.5 4.0-6.0	Pre-insulated copper terminal
LY0036-0003	HT301S(YAC-6)	10 8 6	6.0 10 16	Pin terminal insulated or non-insulated ferrules
LY0036-0004	HT301N(YYT-8)	20-18 16-14 12-10 8	1.5 2.5 6 10	Non-insulated copper terminal
LY0036-0005	HT-301R	22-18 16-14 12-10	0.5-1.0 1.5-2.5 4.0-6.0	"Pre-insulated push-on terminal"

HEAVY DUTY CRIMPING TOOLS 压著工具



PART NO	ITEM NO	Length	Weight	Terminal Sizes ares	
				JISmm ²	DINmm ²
LY0036-0006	SO-2(RYO-2)	200	230	1.25,2.0	1.5,2.5
LY0036-0007	MH-8(RYO-8)	260	430	1.25,2.0,5.5,8.0	1.5,2.5,6.0,10.0
LY0036-0008	MH-14(RYO-14)	285	500	2.0,5.5,8.0,14.0	2.5,6.0,10.0,16.0
LY0036-0009	MH-22(RYO-25)	340	800	5.5,8,14,22	4-6,10,16,25

HEAVY DUTY CRIMPING TOOLS 压著工具



PART NO	ITEM NO	Length	Weight	Terminal Sizes ares			
				AWG/MCM	JISmm ²	DINmm ²	Shape
LY0036-0010	RYO-80(RYO-120)	670	2.7	4,2,1/0,2/0,3/0,4/0	8,14,22,38,60,70,80,100	10,16,25,35,50,70,95,120	Point
LY0036-0011	RYO-150	670	3.9	4,2,1/0,2/0,3/0,4/0,250MCM,300MCM	8,14,22,38,60,70,80,100,125,150	10,16,25,35,50,70,95,120,150	Point

CABLE CUTTERS 电缆剪



PART NO	ITEM NO	Length		Weight (g)	Copper cable	
		(mm)	(In)		DINmm ²	AWG
LY0036-0012	CC-22 RYC-22	160	1 1/4"	160	25	#4
LY0036-0013	CC-38 RYC-38	210	8 1/4"	260	38	#2
LY0036-0014	CC-60 RYC-60	235	9 1/4"	430	60	#1/10
LY0036-0015	CC-100 RYC-100	320	12 5/8"	730	120	#3/0
LY0036-0016	CC-250 RYC-250	600	23 5/8"	1540	250	500
LY0036-0017	CC-400 RYC-400	600	23 5/8"	1540	400	500
LY0036-0018	CC-500 RYC-500	800	31 1/2"	2930	500	1000

标准对照表

Comparison Table of Standard

龙溢端子企业标准 LY enterprise standard		JIS(日本标准)		DIN(德国标准)		GB(国标)	AWG(美国线规)
接线规格(平方) stud size	接线范围(mm²) applicable scope	接线规格(平方) stud size	接线范围(mm²) applicable scope	接线规格(平方) stud size	接线范围(mm²) applicable scope	GB.WE	
1.25	0.25-1.63	1.25	0.25-1.63	1	0.5-1	0.5-1.5	22-16
2	1.04-2.63	2	1.04-2.63	2.5	>1-2.5	2.5	16-14
3.5	2.63-4.60					4	12-10
5.5	2.63-6.64	5.5	2.63-6.64	6	>2.5-6	6	12-10
8	6.64-10.52	8	6.64-10.52	10	>6-16	10	8
14	10.52-16.78	14	10.52-16.78	16	>10-25	16	6
22	16.78-26.66	22	16.78-26.66	25	>25-35	25	4
38	26.66-42.42	38	26.66-42.42	38	>25-50	38	2
50	38.5-59.7			50	>35-70	50	1
60	42.42-60.57	60	42.42-60.57			60	0
70	60.57-76.28			70	>50-95	70	00
80	76.28-96.30	80	76.28-96.30	95	>70-120	95	000
100	96.30-117.20	100	96.30-117.20	120	>95-150	120	000
150	117.2-152.05	150	117.2-152.05	150	>120-185	150	250-300MCM
185	152.05-192.6			185	>159-240	185	300-350MCM
200	192.6-242.27	200	192.6-242.27	240	>185-300	240	400MCM
325	242.27-325.0	325	242.27-325.0			300	500-600MCM